


Raspberry Pi 3



***ID_SD and ID_SC PINS:**
These pins are reserved for ID EEPROM
At boot time this I2C interface will be
interrogated to look for an EEPROM
that identifies the attached board and
allows automatic setup of the GPIOs
(and optionally, Linux drivers).
DO NOT USE these pins for anything other
than attaching an I2C ID EEPROM. Leave
unconnected if ID EEPROM not required.

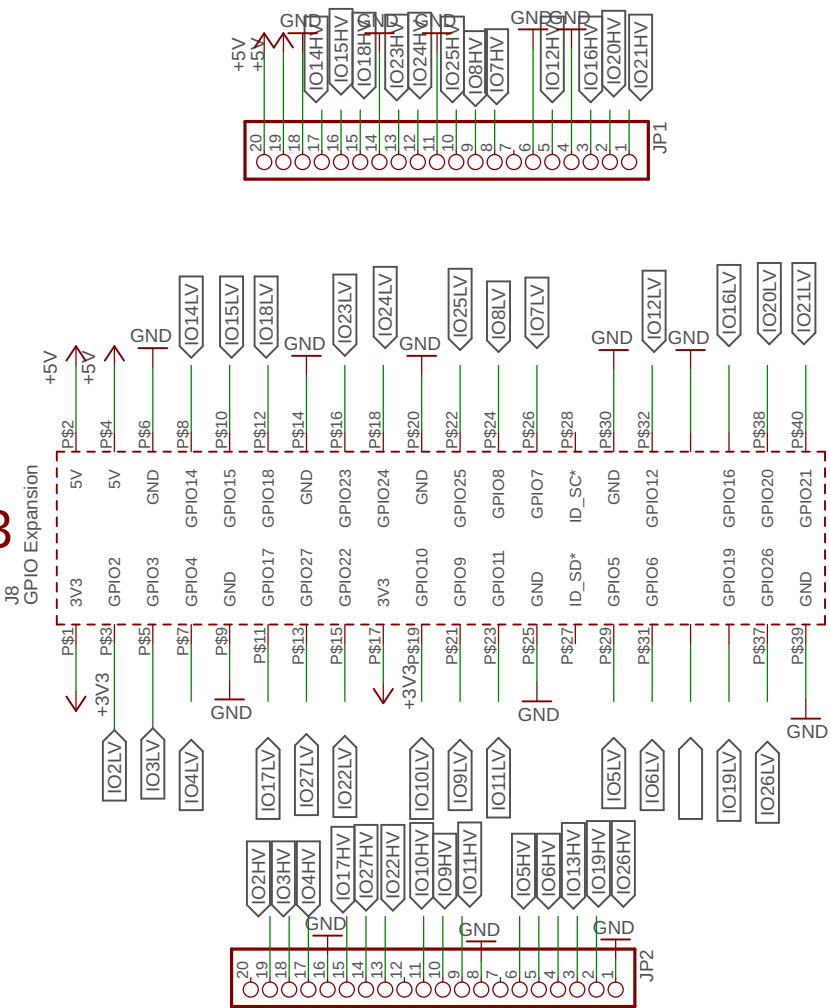