

Long-range Telecommunication in the HF band



Rafael Diniz

Rhizomatica

HERMES - High-frequency Emergency and Rural Multimedia Exchange System

rafael@rhizomatica.org

SplinterCon, December, 2023





Introduction - HERMES

- HERMES was born from the struggle to provide telecommunication access to indigenous and riverside communities in the Amazon rainforest.
- For decades many communities in Amazon, Central Africa, and other places without telecom infrastructure relied on analog SSB HF radios for long range voice communication.
- While HF telecom was once the most advanced long range wireless communication technology, nowadays its civil use is restricted to enthusiasts and isolated communities, and is technologically stuck in the 60's. HERMES aims to push forward civil HF telecom state-of-the-art.
- HERMES provides a digital telecommunication solution for HF which allows the deployment of regional and worldwide autonomous networks without any pre-existing telecom infrastructure.

Introduction - The HF Band

- Defined by ITU as the electromagnetic spectrum between 3 MHz and 30 MHz
- The HF band allows very wide coverage thanks to the Earth's ionosphere reflective properties for the HF band (MF too)
- The propagation type of a signal that reflects or refracts in the ionosphere is called skywave
- HF is the most resilient telecommunication media and is very hard to track a transmission


Band Name	Symbols	Frequency range
Very low frequency	VLF	3 to 30 kHz
Low frequency	LF	30 to 300 kHz
Medium frequency	MF	300 to 3000 kHz
High frequency	HF	3 to 30 MHz
Very high frequency	VHF	30 to 300 MHz
Ultra high frequency	UHF	300 to 3000 MHz
Super high frequency	SHF	3 to 30 GHz
Extremely high frequency	EHF	30 to 300 GHz
Terahertz (ITU, 2015b)	THz	300 to 3000 GHz

Source: ITU (2012), Radio Regulations Article 2


Introduction - Skywave propagation

- The Ionosphere is located in the upper atmosphere, from 80 up 1000 km in altitude
- Skywave can be used for relatively short distances, up to hundreds of kilometers, and long distances communication, to any point on Earth

Sky Wave Propagation

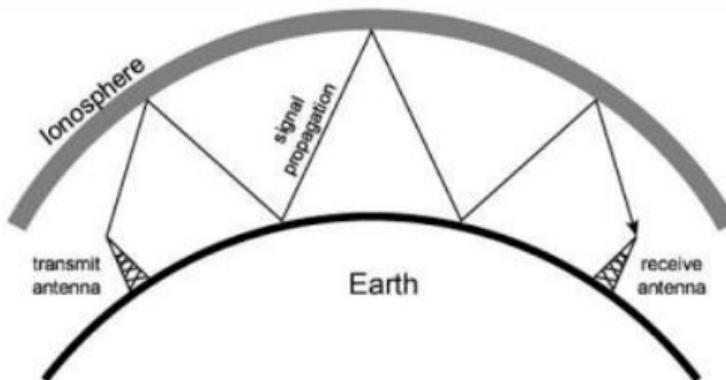


(b) Sky-wave propagation (2 to 30 MHz)

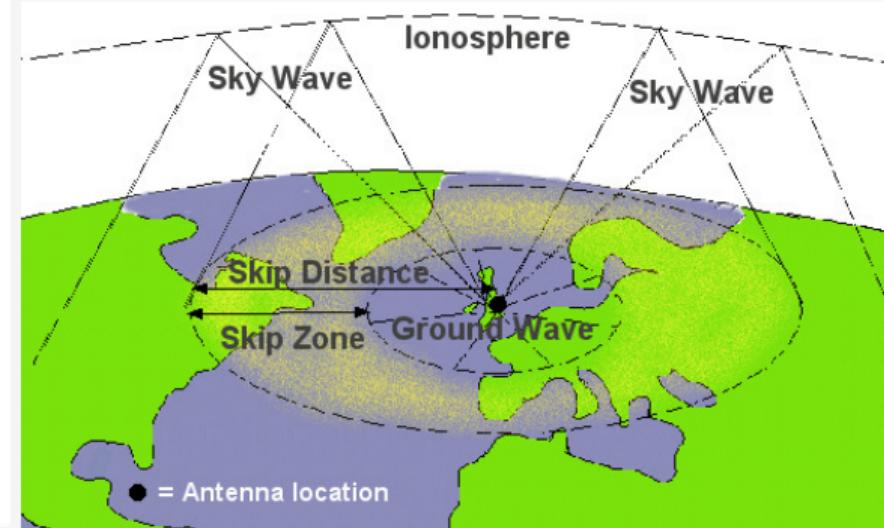

Introduction - HF Antenna

- Frequencies: between 3 MHz and 10 MHz typical for regional coverage
- Antennas: dipole or folded dipole typical, in horizontal or inverted V layout

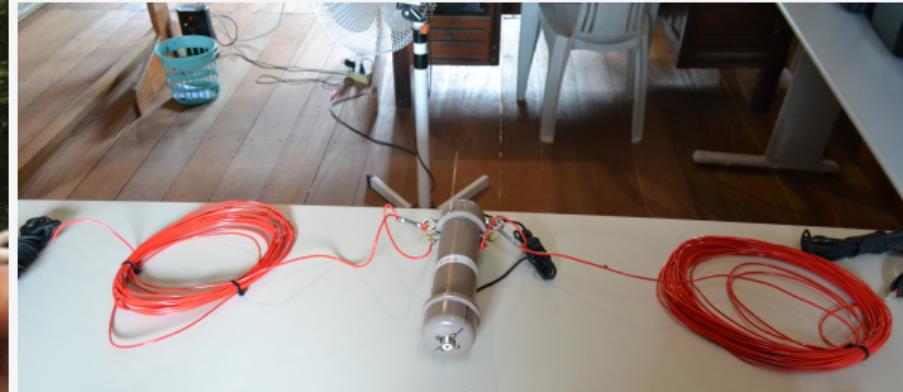


HERMES History

- Fonias Juruá (2015): Stock HF SSB transceiver connected to a box with radio interface, Raspberry Pi and touch screen. Modem used is HamDRM (DRM narrowband).



HERMES History

- HERMES v1 (2018-2020): Rhizomatica's developed integrated Digital HF solution. One box includes the HF transceiver (a customized µBitx) connected to a computer. Modem used is Ardop or VARA, transport system is UUCP.

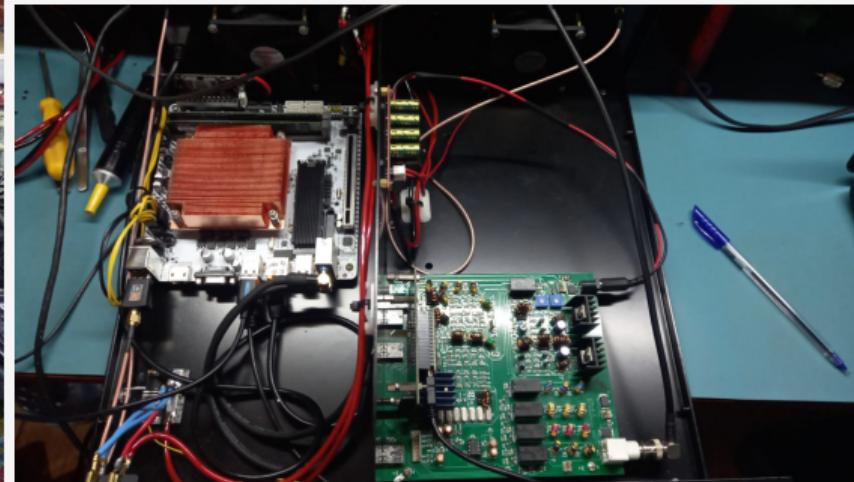

HERMES History

- HERMES v1.1 (2021-2022): HF Transceiver with integrated GPS for accurate time and PLL frequency synthesis and redesigned lambda bridge. Improved email compression. Focus on email service and the use of DeltaChat at communities.



HERMES History

- HERMES v1.x (2019-2023): Workshops and deployments in Amazon region.
- HERMES v2 (2023-): Workshops and ongoing first deployment in Central Africa.



HERMES History

- HERMES v2 (2023-): Adopted another open source wideband HF transceiver: the sBitx. Much reduced size and has native voice support (mic+ptt+speaker). Development ongoing of the Mercury modem for high-speed wideband capability.



Real-world network example

- In the Amazon rainforest region, Pará state, northern Brazil



HERMES system features

- Station equipment (sBitx) contains a HF transceiver and a Raspberry Pi 4
- UUCP based telecommunication over HF
- Users access HERMES services over WiFi (AP exposed by the equipment)
- BBS like direct “station-to-station” messages (audio and image too!)
- Email is the main service. Emails are highly compressed before going over the air
- Emails are synchronized to a “gateway” node over HF, which routes emails among HF nodes or the Internet

User interface - WEB Frontend

<https://github.com/Rhizomatica/hermes-gui>

- Provides users Web access to configurations
- User management for both Web UI and email
- Multi-language: en, es, pt, fr
- Message system (BBS like)
- System logs, UUCP queue management
- UI for voice communication with easy frequency and mode (USB, LSB) selection and volume adjustment

User interface - WEB Frontend

9.300,00 kHz LSB	 Messages	 E-mail	 Aide
 Configuration de la radio	 Gestion des utilisateurs	 Configuration des messages	 Liste de transmission
 Information sur les stations	 Gestionnaire Wi-Fi et ethernet	 Journal détaillé	<div style="background-color: #333; color: white; padding: 5px; text-align: center;">Thème sombre</div> <div style="background-color: orange; color: white; padding: 5px; text-align: center;">Déconnexion </div>



User interface - WEB Frontend

Configuration de la radio

Déconnecté	Fréquence données 9.300,00 kHz LSB	SWR 1.3
Puissance 22.3 W	Mode d'opération RX	Numéro de série 0
Fréquence données radio : 9.300,00kHz 9300 <input type="button" value="changer la fréquence"/>	Seuil d'activation de la protection 25 <input type="button" value="changer la limite"/>	
Mode USB <input checked="" type="radio"/> LSB	PTT (OFF) <input type="radio"/>	
protection (OFF) <input type="button" value="réinitialisation"/>	<input type="button" value="réinitialisation aux paramètres par défaut"/>	
<input type="button" value="redémarrer"/>	<input type="button" value="SOS emergency"/>	

User interface - WEB Frontend

The screenshot shows a web-based application interface for managing messages. At the top left is the HERMES logo and the URL "estacao4.hermes.radio". On the right side, there is a status indicator "USB 1.085,50 kHz digital" and a menu icon. Below the header, a breadcrumb navigation shows the path: "/home /messages". The main content area has a title "Message public" with a help icon. There are two buttons: "nouveau" (new message) and "messages envoyés" (sent messages). A search bar with the placeholder "recherche" and a magnifying glass icon is present. The message list displays five entries, each with a trash icon and a timestamp:

- PU2UIT-4, 30/11/2023, 04:26 PM
Nouveau message fichier
- PU2UIT-4, 01/06/2023, 08:24 PM
test message
- PU2UIT-4, 25/05/2023, 08:19 PM
Mensagem com senha
- PU2UIT-4, 25/05/2023, 08:15 PM
Mensagem com senha
- PU2UIT-4, 25/05/2023, 08:13 PM

A power button icon is located at the bottom right.

User interface - WEB Frontend

 HERMES
estacao4.hermes.radio

USB 1.085,50 kHz
digital

Nouveau message fichier



MONSANTO

 download.jpeg

Origine : PU2UIT-4
Destination : estacao4
Envoyé à : 30/11/2023, 04:26 PM



User interface - WEB Frontend

The screenshot shows a web-based user interface for the HERMES system. At the top left is the logo 'HERMES' with the URL 'estacao4.hermes.radio'. At the top right are status indicators for 'USB 1.085,50 kHz digital' and a menu icon. Below the header, a breadcrumb navigation shows '/home /email'. The main content area is titled 'E-mail' with a help icon. It contains two links: 'Webmail' with a blue and white cube icon and 'Deltachat' with a blue speech bubble icon. A horizontal line separates this from the download instructions. Below the line, the text reads 'Pour télécharger Deltachat cliquez sur un des liens ci-dessous :'. Underneath are five download links: 'Android' (orange), 'Windows' (orange), 'Ubuntu/Debian' (orange), 'Mac OSX' (orange), and 'Ubuntu/Debian' (orange). A note at the bottom states: '*Note: On Iphone and ipad you will need to download the app from the App Store in a place with internet.' Below this is a link 'Configurer deltachat' with a help icon. In the bottom right corner, there is a power button icon.

HERMES
estacao4.hermes.radio

USB 1.085,50 kHz
digital

/home /email

E-mail ②

Webmail

Deltachat

Pour télécharger Deltachat cliquez sur un des liens ci-dessous :

[Android](#)

[Windows](#)


[Ubuntu/Debian](#)

[Mac OSX](#)

*Note: On Iphone and ipad you will need to download the app from the App Store in a place with internet.

Configurer deltachat ②

User interface - Analog Voice Telephony

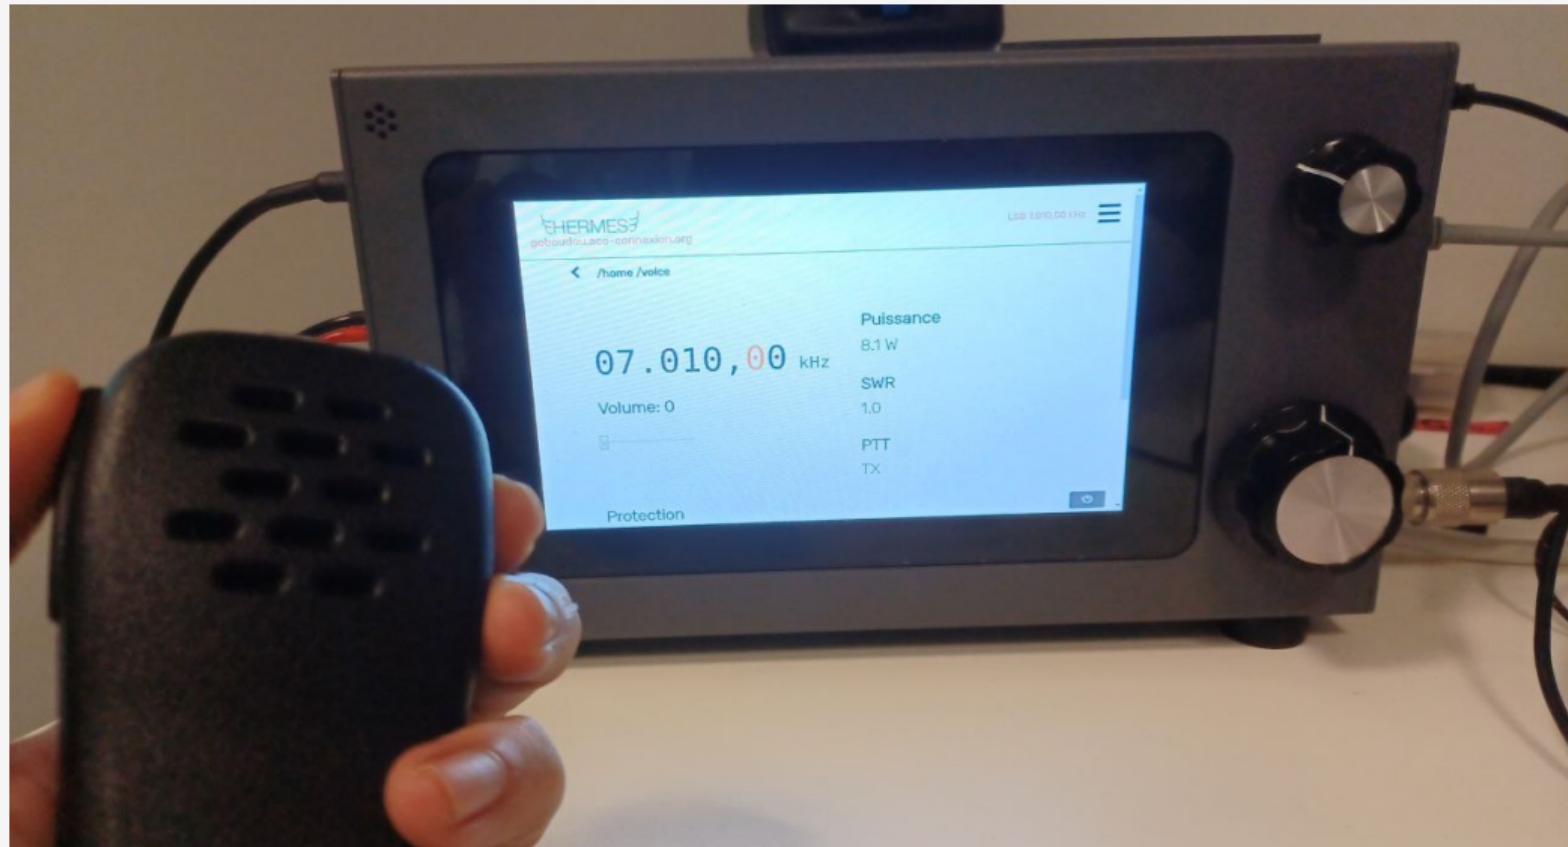

E-mail

E-mail stack

- E-mail software (Postfix, Dovecot) run in HERMES radio
- E-mail compression using uuxcomp called directly from postfix (!crmail), many headers stripped, xz compression
- Specific transcoding for audio (LPCNet) and image (VVC) attachments at uuxcomp
- One station (called “gateway”) routes the emails between HF nodes and a main email server with public IP address (for routing over the Internet)
- DeltaChat is the recommended email client

DeltaChat

The image consists of three side-by-side screenshots of the DeltaChat mobile application:

- Left Screenshot:** Shows the "Log In to Your Server" screen. It has fields for "E-Mail Address" (jou@acx.hermes.radio) and "Existing Password". Below the fields, a note says "There are no Delta Chat servers, your data stays on your device." A "Advanced" button is at the bottom, followed by a detailed note about automatic server setup.
- Middle Screenshot:** Shows a group chat titled "Hermes root cast" with 15 members. The message "Teste texto 5" was sent on Nov 21, 09:46. Below the message is a photo of a keyboard. A message from "Samir" is visible at the bottom: "This group messages the root users for all stations".
- Right Screenshot:** Shows a one-on-one chat with "Samir" (samir666@gmail.com). The message "nao nao, tou no deltachat-desktop tb. Se liga nisso:" was sent on JAN 4 18:50. Below it is a game message: "Tower Builder Top builder is Diniz INICIAR...". A notification at the bottom says "Diniz scored 75 in Tower Builder!". The message "Escrever uma mensagem" is at the bottom.

REST Backend

<https://github.com/Rhizomatica/hermes-api>

- Radio API: set/get frequency, mode, power levels, volume, swr protection trigger, etc
- User API: user management for web admin access and e-mail accounts (same login)
- Messages API: direct message between hosts (just a uucp copy of a packaged message)
- System API: set/get system status / configuration
- UUCP API: provides a way to list and delete UUCP jobs, and start a connection (uucico)
- Gateway API: provides scheduling facilities and station/frequency table

Good ol' UUCP

Taylor's UUCP goes over the air

- UUCPD bridges UUCP to HF modem through pipes and shared memory
- The UUCP nodename is the station callsign
- Protocol 'y' is used, and long timeouts are set

/etc/uucp/port:

port HFP

type pipe

command /usr/bin/uuport -c \Z

HERMES-specific network stack components (hermes-net repo)


<https://github.com/Rhizomatica/hermes-net>

- `trx_v1-{firmware,userland}`: HERMES v1 transceiver firmware and radio control tools
- `trx_v2-userland`: HERMES v2 control and DSP software for the sBitx radio
- `uucpd`: UUCP daemon and tools (bridges UUCP and the HF modem)
- `uuxcomp`: uux wrapper which compresses an e-mail before enqueueing it, and `crmail` to decompress
- `system_scripts`: image and audio compression scripts, email and uucp management, gateway “caller”, etc
- `system_services`: init scripts and udev rules

(software-defined) Modem

Currently using VARA HF


- 2300 Hz BW, ARQ, Adaptive Modulation
- Modes range from 16 bps up to 5 kbps
- Proprietary Visual Basic 6 application (runs well on Hangover-Wine)

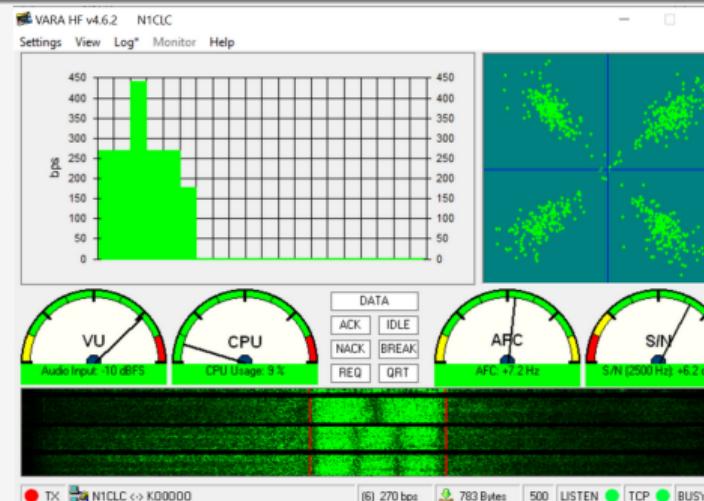


In Development - Mercury

<https://github.com/Rhizomatica/mercury>

- Open source configurable software-defined modem (layers 0 and 1)
- Modulation BPSK, QPSK, 8QAM, 16QAM, 32QAM and 64QAM
- LDPC code rate 2/16, 8/16 and 14/16

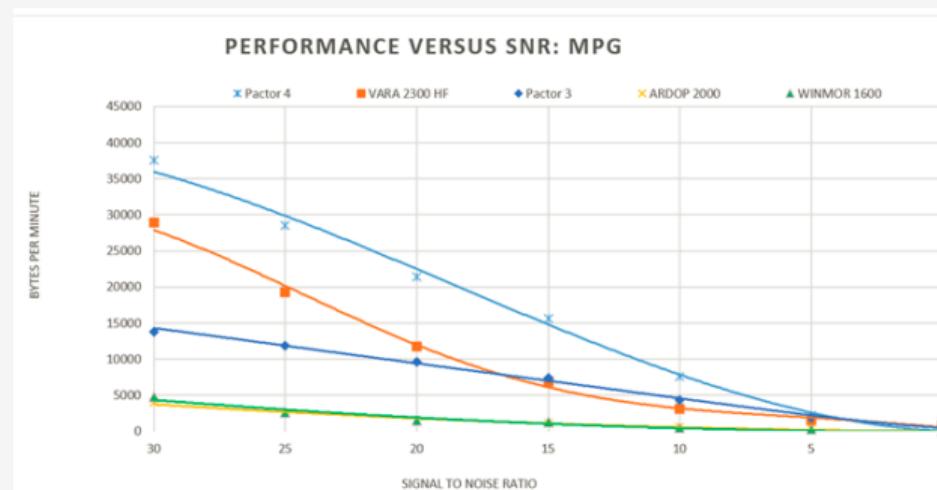

Mercury

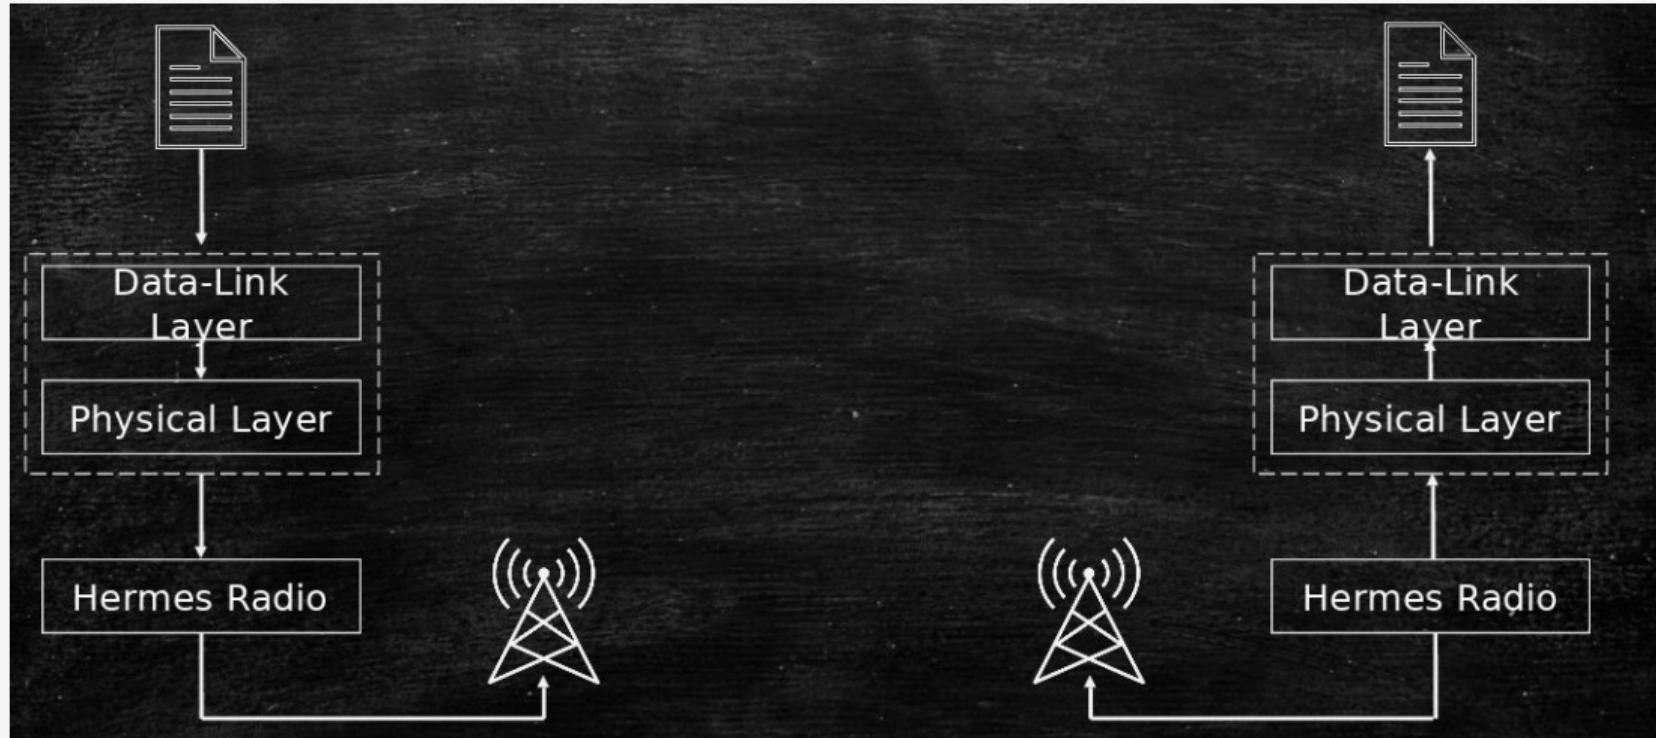


Mercury Data-Link Layer



Configurable Data Block size

to avoid fast TX/RX switch




Automatic repeat requests
(ARQ)



TCP/IP Interface

Gear-Shift

Mercury Physical Layer

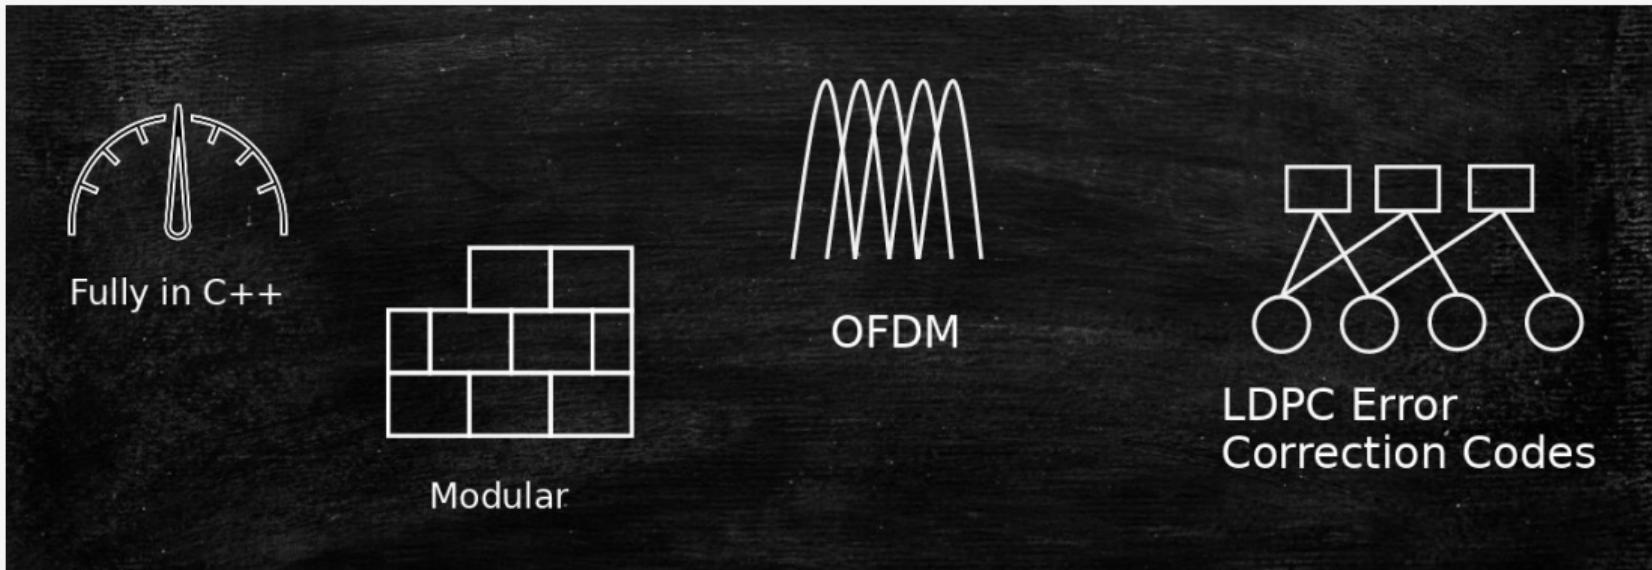


Current work

- Substitute VARA by Mercury - HERMES will be 100% Free Software!
- Robust (and stealth!) operation with 0db or less of SNR for signal reception
- Integration to SMS and other messaging services
(<https://github.com/Rhizomatica/hermes-messaging/>)
- Sensors data acquisition and transmission - binary data using paq8px compression
(<https://github.com/Rhizomatica/hermes-sensors/>)
- Supporting large scale deployment in Central Africa

Possible future works


- Develop more advanced ML-based audio and image codecs
- NNCP instead of UUCP for improved security
- Multiple users capability (beyond P2P) MAC
- Adaptive bandwidth and channels selection
- Support real-time messaging
- Digital Telephony
- DRM reception
- DRM broadcast

HF Mobile Telephony

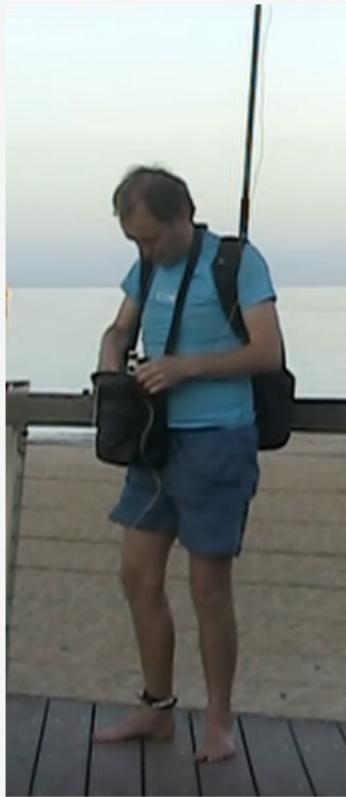

What you can do in today's conditions



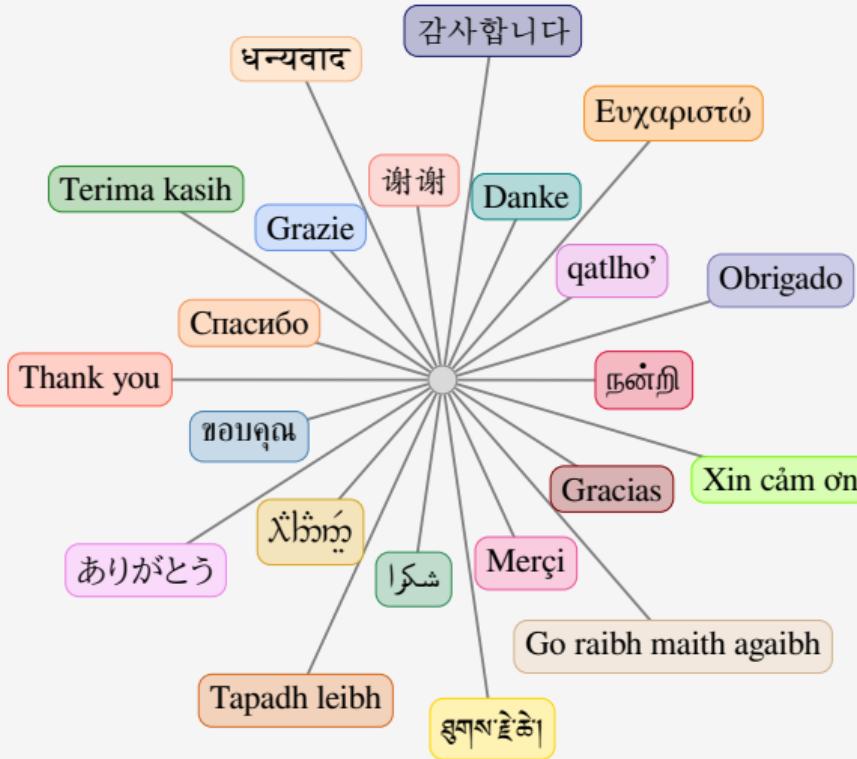

rafael@rhizomatica.org

Questions?