

ALTEC AC25-95B

Hydraulic Telescopic Crane

- 25 ton (22t) Maximum Lifting Capacity
- 95 ft (29 m) 4-Section Boom
- 3 Position Out-and-Down Outriggers
- Walk Through Control Stations
- Typical Finished Weight of 50,000 lbs (22,679 kg)



ALTEC AC25-95B SPECIFICATIONS



Altec LMAP System

RECOMMENDED FEATURES

- Wheel Chocks
- Outrigger Pads
- Fall Protection System (with Platform)
- Radio Remote Control (with Platform)
- Platform Test Lift Package (with Platform)

OPTIONS

- 1-Piece 26 ft (7.9 m) Jib
- 2-Piece 44 ft (13.4 m) jib, 26 ft (13.4 m) Retracted
- 2-Man Steel Platform
- 370 Degree Non-Continuous Rotation
- Continuous Rotation
- 12,000 lb (5,443 kg) 2 Speed Winch
- Hydraulic Tool Circuit at Tail Shelf
- Hydraulic Tool Circuit at Boom Tip
- Rotation Resistant Wire Rope
- Winch Control at Load Hook Stow Point
- Hydraulic Oil Cooling System

STANDARD SAFETY FEATURES

- LMAP (Load Moment & Area Protection) System
 - Rated Capacity Limiter
 - Displays: Boom Length, Boom Angle, Load on Hook, Percent of Rated Capacity
 - Electronic Working Area Definition
 - Operator Defined Audible Alarm Set-Points for Boom Angle, Length and Rotational Position
- Outrigger Boom Interlock System
- Outrigger Motion Alarm • Back-Up Alarm
- Emergency Stop at Operator Controls
- Winch Drum Rotation Indicator
- Anti-Two Block Device
- Front Bumper Outrigger
- Walk-Through Control Stations

CRANE SPECIFICATIONS


- 50,000 lb (22,679 kg) Maximum Lifting Capacity
- 95 ft (29 m) 4-Section Boom
- 105 ft (32 m) Maximum Sheave Height
- Stowed Travel Height of 13.25 ft (4.04 m)
- Vehicle Travel Length of 39.9 ft (12.1 m)
- 3 Position Out-and-Down Outriggers
- Full Span 18.5 ft (5.6 m)
- Mid Span 14 ft (4.3 m)
- Short Span 9 ft (2.7 m)
- Hydraulic Pilot-Operated Control System
- 12,000 lb (5,443 kg) Winch w/ Burst of Speed

UNIT		RECOMMENDED CHASSIS DIM				MINIMUM RECOMMENDED CHASSIS				
Model	Rear Axle	CT (in)	WB (in)	AF (in)	AS (in)	Front Axle Rating (lbs)	Rear Axle Rating (lbs)	GVWR (lbs)	Frame Sec Modulus (in ³)	Frame RBM (in-lb)
AC25	Tandem	193	262	127	54	16,000	34,000	50,000	21.4	2,354,000

ALTEC AC25-95B CAPACITIES




MODEL: AC25-95B

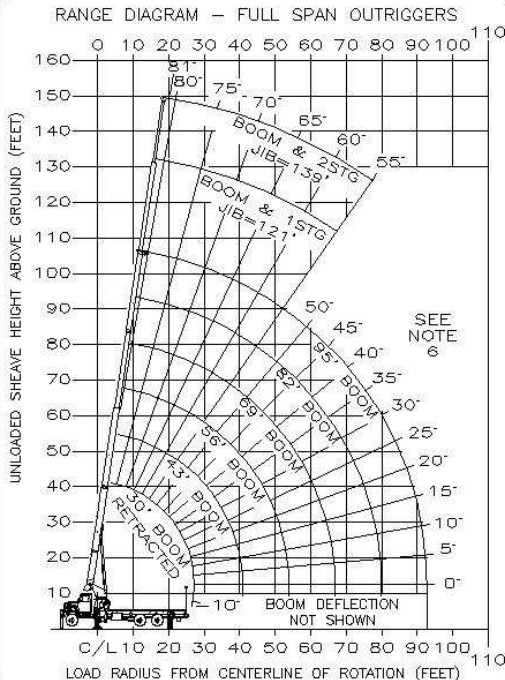

BOOM LOAD CAPACITIES IN LBS. WITH FULL SPAN OUTRIGGERS

	30 FT BOOM	43 FT BOOM	56 FT BOOM	69 FT BOOM	82 FT BOOM	95 FT BOOM
LOAD RADIUS (FT)	4. LBS	4. LBS	4. LBS	4. LBS	4. LBS	4. LBS
5	77	50000				
8	71	36800	77	17600		
10	66	30900	74	17800	78	17500
12	62	26100	71	18000	76	17600
14	57	22200	68	18200	74	17700
16	52	19100	65	18500	72	17900
18	47	17600	62	18000	70	18100
20	41	15400	59	15800	68	16000
25	19	11400	51	11900	62	12100
30			42	9300	56	9500
35			30	7400	49	7600
40					42	6100
45					33	4800
50					20	3800
55						
60						
65						
70						
75						
80						
85						
90						
0	8000	0	4900	0	3100	0
	825		550		425	

NOTE: RATINGS ABOVE THE HEAVY LINE ARE BASED ON STRUCTURAL COMPETENCE AND NOT ON MACHINE STABILITY

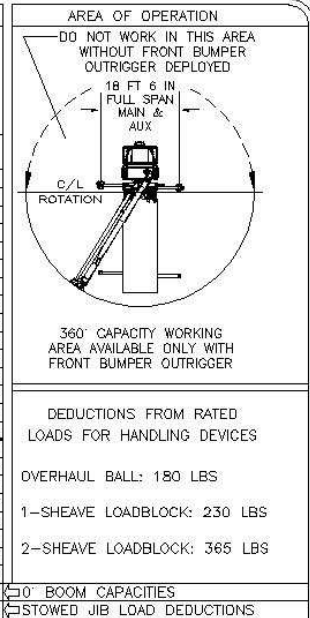

DEPLOYED JIB LOAD CAPACITIES (LBS) FOR ALL BOOM LENGTHS
JIB CAPACITIES ARE FOR FULL SPAN OUTRIGGERS (18 FT 6 IN CENTER TO CENTER)

LOADED BOOM ANGLE	55° *	60°	65°	70°	75°	80°
RETRACTED 26 FT JIB	775	1450	2250	3100	4100	4100
EXTENDED 44 FT JIB	550	1125	1550	2050	2550	2550

*DO NOT OPERATE JIB BELOW THIS ANGLE UNLESS BOOM IS FULLY RETRACTED. SEE NOTE 6.

OPERATOR AIDS MUST BE IN GOOD OPERATING CONDITION BEFORE OPERATING CRANE. REFER TO OWNERS MANUAL.

KEEP AT LEAST 3 WRAPS OF LOADLINE ON DRUM AT ALL TIMES.

USE ONLY 9/16" (1.47 cm) DIAMETER IWRC OR ROTATION RESISTANT WIRE ROPE WITH 37,000 LBS (16,782 KG) MIN. BREAKING STRENGTH ON THIS MACHINE.

		1 PART LOAD LINE	2 PART LOAD LINE	3 PART LOAD LINE	4 PART LOAD LINE	5 PART LOAD LINE	6 PART LOAD LINE
							
		LOADS UP TO	LOADS UP TO	LOADS UP TO	LOADS UP TO	LOADS UP TO	LOADS UP TO
IWRC XXIP WIRE ROPE (LBS)		10,571 lbs	21,142 lbs	31,713 lbs	42,284 lbs	52,855 lbs	60,000 lbs
IWRC XXIP WIRE ROPE (KG)		4,795 kg	9,590 kg	14,385 kg	19,180 kg	23,975 kg	27,216 kg
ROTATION RESISTANT WIRE ROPE (LBS)		7,400 lbs	14,800 lbs	22,200 lbs	29,600 lbs	37,000 lbs	44,400 lbs
ROTATION RESISTANT WIRE ROPE (KG)		3,356 kg	6,713 kg	10,069 kg	13,426 kg	16,783 kg	20,140 kg
MAXIMUM BOOM LENGTH AT MAXIMUM ELEVATION WITH RIGGING SHOWN TO REACH THE GROUND (FT)		103 FT BOOM + 44 FT JIB	103 FT BOOM	74 FT BOOM	58 FT BOOM	45 FT BOOM	37 FT BOOM
MAXIMUM BOOM LENGTH AT MAXIMUM ELEVATION WITH RIGGING SHOWN TO REACH THE GROUND (M)		32 m BOOM + 13 m JIB	32 m BOOM	23 m BOOM	17 m BOOM	13 m BOOM	11 m BOOM
WINCH		LIFTS AND SPEEDS (ENGLISH UNITS)					
9/16" (1.4cm) DIAMETER IWRC XXIP CABLE SUPPLIED	STANDARD PLANETARY WINCH HIGH SPEED	4,620 LBS. 249 FT/MIN	9,240 LBS. 124 FT/MIN	13,860 LBS. 83 FT/MIN	18,480 LBS. 62 FT/MIN	23,100 LBS. 50 FT/MIN	27,720 LBS. 42 FT/MIN
	STANDARD PLANETARY WINCH LOW SPEED	9,880 LBS. 115 FT/MIN	19,760 LBS. 58 FT/MIN	29,640 LBS. 38 FT/MIN	39,520 LBS. 29 FT/MIN	49,400 LBS. 23 FT/MIN	59,280 LBS. 19 FT/MIN
WINCH		LIFTS AND SPEEDS (METRIC UNITS)					
9/16" (1.4cm) DIAMETER IWRC XXIP CABLE SUPPLIED	STANDARD PLANETARY WINCH HIGH SPEED	2,096 kg 1.26 m/s	4,272 kg .63 m/s	6,287 kg .42 m/s	8,382 kg .37 m/s	10,477 kg .254 m/s	12,573 kg .21 m/s
	STANDARD PLANETARY WINCH LOW SPEED	4,481 kg .58 m/s	8,963 kg .30 m/s	13,444 kg .19 m/s	17,925 kg .15 m/s	22,407 kg .12 m/s	26,888 kg .09 m/s

ALL WINCH PULLS AND SPEEDS IN THIS CHART ARE SHOWN ON THE 3RD LAYER. WINCH LINE PULLS WOULD INCREASE ON THE FIRST AND SECOND LAYERS. WINCH LINE SPEED WOULD DECREASE ON THE FIRST AND SECOND LAYERS. WINCH LINE PULLS MAY BE LIMITED BY THE WINCH CAPACITY OF 8,390 LBS (3,806 KG) FULL DRUM OR ANSI CABLE. SAFETY LIMITS SHOWN IN CHART FOR IWRC XXIP AND ROTATION RESISTANT WIRE ROPES.


WINCH SPECIFICATIONS

REV 'A' CHART




MODEL: AC25-95B

RANGE DIAGRAM - FULL SPAN OUTRIGGERS

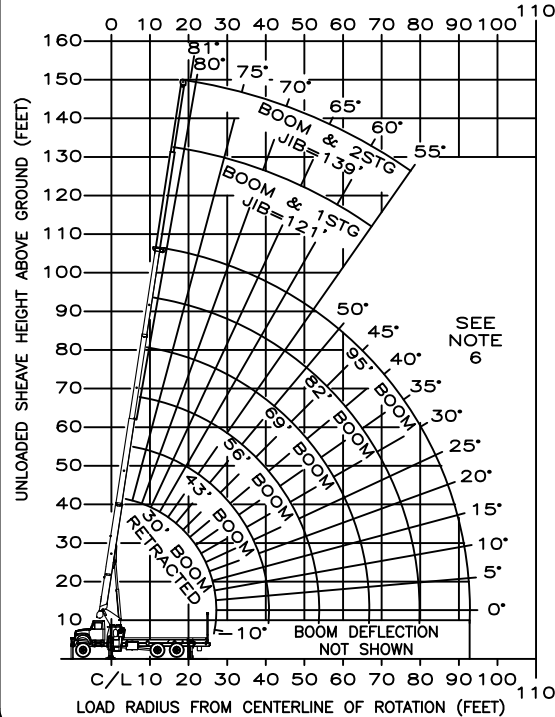

BOOM LOAD CAPACITIES IN LBS. WITH FULL SPAN OUTRIGGERS




LOAD RADIUS (FT)	30 FT BOOM	43 FT BOOM	56 FT BOOM	69 FT BOOM	82 FT BOOM	95 FT BOOM
5	77 50000					
8	71 36800	77 17600				
10	66 30900	74 17800	78 17500			
12	62 26100	71 18000	76 17600			
14	57 22200	68 18200	74 17700	78 17400		
16	52 19100	65 18500	72 17900	76 16100	79 13900	
18	47 17600	62 18000	70 18100	75 14900	78 12900	80 10000
20	41 15400	59 15800	68 16000	73 13900	76 12000	79 10000
25	19 11400	51 11900	62 12100	68 11600	73 10100	76 8800
30		42 9300	56 9500	64 9700	69 8300	73 7600
35		30 7400	49 7600	59 7800	65 7000	70 6400
40			42 6100	54 6250	61 6100	66 5500
45			33 4800	48 4950	57 5050	63 4800
50			20 3800	42 4000	52 4100	59 4150
55				35 3200	47 3300	55 3400
60				26 2600	42 2700	51 2750
65				11 2100	36 2200	47 2250
70					29 1750	42 1850
75					20 1400	37 1500
80						32 1150
85						24 900
90						14 675
0	8000	4900	3100	2000	1150	575
	825	550	425	350	300	250

DEPLOYED JIB LOAD CAPACITIES (LBS) FOR ALL BOOM LENGTHS
JIB CAPACITIES ARE FOR FULL SPAN OUTRIGGERS (18 FT 6 IN CENTER TO CENTER)

LOADED BOOM ANGLE	55° *	60°	65°	70°	75°	80°
RETRACTED 26 FT JIB	775	1450	2250	3100	4100	4100
EXTENDED 44 FT JIB	550	1125	1550	2050	2550	2550

* DO NOT OPERATE JIB BELOW THIS ANGLE UNLESS BOOM IS FULLY RETRACTED. SEE NOTE 6.

AREA OF OPERATION



360° CAPACITY WORKING AREA AVAILABLE ONLY WITH FRONT BUMPER OUTRIGGER

DEDUCTIONS FROM RATED LOADS FOR HANDLING DEVICES

OVERHAUL BALL: 180 LBS

1-SHEAVE LOADBLOCK: 230 LBS


2-SHEAVE LOADBLOCK: 365 LBS

0° BOOM CAPACITIES
STOWED JIB LOAD DEDUCTIONS




MODEL: AC25-95B

RANGE DIAGRAM - SHORT SPAN OUTRIGGERS

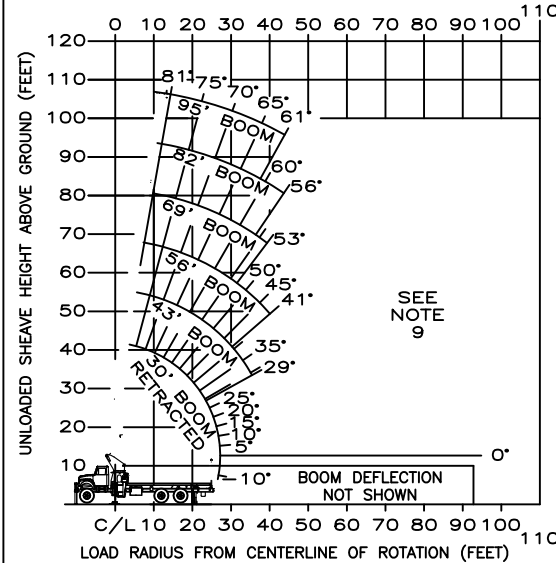

BOOM LOAD CAPACITIES IN LBS. WITH SHORT SPAN OUTRIGGERS



LOAD RADIUS (FT)	30 FT BOOM	43 FT BOOM	56 FT BOOM	69 FT BOOM	82 FT BOOM	95 FT BOOM
5	77 39000					
8	71 29400	77 17600				
10	66 18400	74 17800	78 17500			
12	62 12600	71 13300	76 13600			
14	58 9300	69 9900	74 10200	78 10300		
16	53 7100	66 7600	72 7900	76 8000	79 8150	
18	48 5500	63 6000	70 6250	74 6400	77 6500	80 6600
20	42 4300	60 4800	67 5050	72 5200	76 5300	78 5400
25	22 2400	51 2850	62 3100	68 3200	72 3300	75 3400
30		42 1650	55 1875	63 2000	68 2100	72 2150
35		29 850	49 1075	58 1200	64 1300	68 1350
40			41 475	53 625	60 700	65 750
45					56 250	61 325
50						
55						
60						
0	1900					
	825	550	425	350	300	250

DEPLOYED JIB LOAD CAPACITIES (LBS) FOR ALL BOOM LENGTHS
JIB CAPACITIES ARE FOR SHORT SPAN OUTRIGGERS (9 FT 0 IN MIN CENTER TO CENTER)

LOADED BOOM ANGLE	55° *	60°	65°	70°	75°	80°
RETRACTED 26 FT JIB	775	1450	2250	3100	4100	4100
EXTENDED 44 FT JIB	550	1125	1550	2050	2550	2550


DO NOT OPERATE OR ERECT JIBS IN THIS OUTRIGGER CONFIGURATION. SEE NOTE 19.

970235786 A
(SHEET 3)




MODEL: AC25-95B

RANGE DIAGRAM - MID SPAN OUTRIGGERS

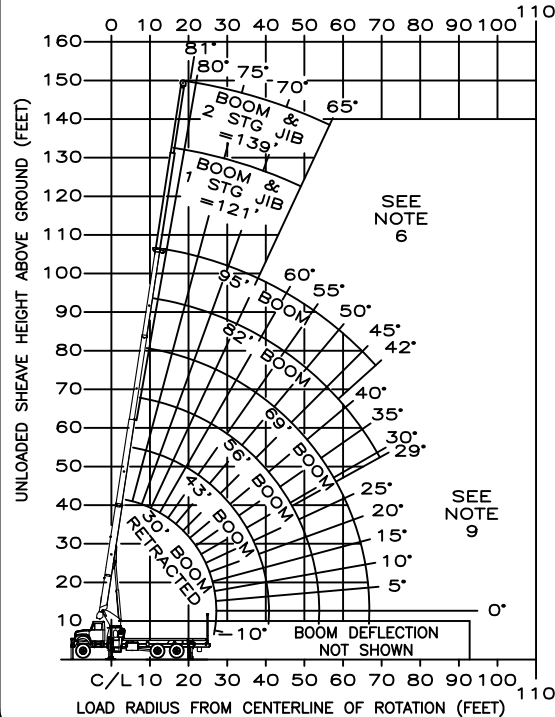

BOOM LOAD CAPACITIES IN LBS. WITH MID SPAN OUTRIGGERS




LOAD RADIUS (FT)	30 FT BOOM	43 FT BOOM	56 FT BOOM	69 FT BOOM	82 FT BOOM	95 FT BOOM
5	77 46000					
8	71 35000	77 17600				
10	66 30900	74 17800	78 17500			
12	62 26100	71 18000	76 17600			
14	57 22200	68 18200	74 17700	78 17400		
16	52 18600	65 18500	72 17900	76 16100	79 13900	
18	47 14500	62 15200	70 15500	75 14900	78 12900	80 10000
20	41 11700	59 12300	68 12600	73 12800	76 12000	79 10000
25	21 7500	51 8100	62 8300	68 8500	73 8600	76 8700
30		42 5600	56 5800	64 6000	69 6100	73 6200
35		30 4000	49 4200	59 4400	65 4500	69 4600
40			42 3100	53 3300	61 3400	66 3400
45			33 2300	48 2450	56 2550	62 2600
50			20 1650	41 1800	52 1900	58 2000
55				34 1300	47 1400	55 1500
60				25 900	42 1000	51 1075
65				10 550	36 675	46 725
70					29 400	42 450
75						
80						
85						
90						
0	6600	2900	1350	500		
	825	550	425	350	300	250

DEPLOYED JIB LOAD CAPACITIES (LBS) FOR ALL BOOM LENGTHS
JIB CAPACITIES ARE FOR MID SPAN OUTRIGGERS (14 FT 0 IN MIN CENTER TO CENTER)

LOADED BOOM ANGLE	65° *	70°	75°	80°
RETRACTED 26 FT JIB	800	1925	3900	4100
EXTENDED 44 FT JIB	550	1500	2550	2550

* DO NOT OPERATE JIB BELOW THIS ANGLE UNLESS BOOM IS FULLY RETRACTED. SEE NOTE 6.

AREA OF OPERATION



360° CAPACITY WORKING AREA AVAILABLE ONLY WITH FRONT BUMPER OUTRIGGER

DEDUCTIONS FROM RATED LOADS FOR HANDLING DEVICES


OVERHAUL BALL: 180 LBS

1-SHEAVE LOADBLOCK: 230 LBS

2-SHEAVE LOADBLOCK: 365 LBS

0° BOOM CAPACITIES
STOWED JIB LOAD DEDUCTIONS

1 PART LOAD LINE 2 PART LOAD LINE 3 PART LOAD LINE 4 PART LOAD LINE 5 PART LOAD LINE

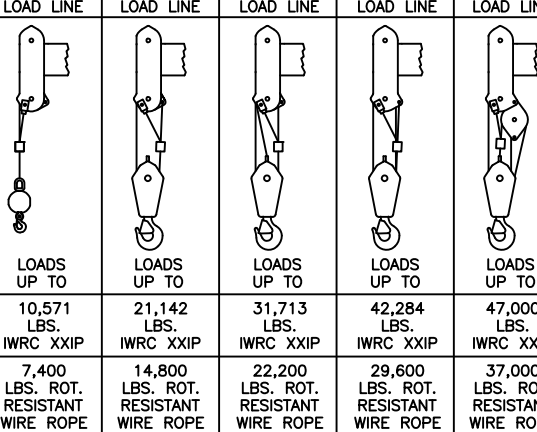

95 FT + 44 FT JIB 95 FT BOOM 74 FT BOOM 56 FT BOOM 45 FT BOOM

MAXIMUM BOOM LENGTH AT MAXIMUM ELEVATION WITH RIGGING SHOWN TO REACH THE GROUND

SEE OWNERS MANUAL FOR OTHER REEVING OPTIONS
With certain boom and hoist tackle combinations, maximum capacities may not be obtainable with standard cable lengths.

INFORMATION

- Deductions must be made from rated loads for stowed jib, optional attachments, hooks and loadblocks (see deduction chart). Weights of slings and other load handling equipment shall be considered a part of the load.
- Crane load ratings with outriggers are based on outriggers extended and set with all tires clear of the ground.
- Load ratings do not exceed 85% of tipping load.
- The maximum outrigger pad load is 60,000 lbs at rated capacities.

DEFINITIONS

- Operating radius is the horizontal distance from the centerline of rotation to the center of the vertical load line or load hook with load suspended.
- Loaded boom angle as shown in the capacity chart is the included angle between the horizontal and longitudinal axes of the boom base after lifting rated load at rated radius.

CAUTION

OPERATOR AIDS MUST BE IN GOOD OPERATING CONDITION BEFORE OPERATING CRANE. REFER TO OWNERS MANUAL.

KEEP AT LEAST 3 WRAPS OF LOADLINE ON DRUM AT ALL TIMES.

USE ONLY 9/16" DIAMETER IWRC OR ROTATION RESISTANT WIRE ROPE WITH 37,000 LBS. MIN. BREAKING STRENGTH ON THIS MACHINE.

⚠ DANGER

- The operator must read, understand and follow the instructions found in the owners manual before operating this crane.
- Positioning or operation of crane beyond areas shown on this chart is not intended nor approved except where specified in owners manual.
- Loaded boom angles at specified boom lengths give only an approximation of the operating radius. The boom angle before loading should be greater to account for deflections. Do not exceed the operating radius for rated loads.
- When between listed boom lengths or radii, always use the smallest of the values shown. Capacities for the 30-ft boom length must only be lifted with boom fully retracted.
- Do not attempt to tip the machine to determine allowable loads.
- When jib is erected boom must be fully retracted before lowering below minimum boom with jib angles. Retracted boom with jib has no lifting capacity below a 55° angle with full span outriggers. Retracted boom with jib has no lifting capacity below a 65° angle with mid span outriggers.
- Use rating of next lower boom angle for boom angles not shown on jib load rating chart.
- Do not lift off the main boom tip while the jib is erected. Do not travel with crane boom extended or jib erected.
- Do not lower boom into this area. Instability may occur. Hydraulic pressure may not allow raising the boom without retracting boom first.
- Crane load ratings on outriggers are based on freely suspended loads with the machine leveled and standing on firm uniform supporting surface. Do not move a load horizontally on the ground in any direction.
- Actual working capacities depend on supporting surface, wind and other factors affecting stability such as hazardous surroundings, experience of personnel, and proper handling. All these factors must be taken into account by the operator.
- The maximum in service wind speed is 20 mph. It is recommended when wind velocity is between 20 mph and 30 mph rated loads and boom lengths shall be appropriately reduced and/or other measures shall be taken to ensure stability and load control. When wind speed exceeds 30 mph main boom should be retracted and stowed.
- For duty cycle operations (e.g., clam shell, concrete bucket work) weight of load must not exceed 80% of rated lifting capacities.
- Multi-crane lift operations must be carefully planned well in advance and should only be performed by skilled personnel experienced in such procedures.
- Horizontal outrigger beams are marked to indicate "Short Span" and "Mid Span" positions. Entire mark must be exposed before operating in "Short Span" or "Mid Span" mode.
- The maximum load which may be telescoped is limited by hydraulic pressure, boom angle and boom lubrication. It is allowable to attempt to telescope any load within the limits of the load rating chart.
- Never handle personnel with this machine unless the requirements of applicable national, state, and local regulations and safety codes are met.
- Do not lift loads when boom is fully lowered. The LMAP senses pressure and will not provide warnings or lockout when the boom cylinder is fully retracted.
- Do not operate or erect jibs in "Short Span" outrigger configuration. THIS MACHINE COMPLIES WITH ASME B30.5 AND OSHA REGULATIONS 1910.180 AND 1926.550 WHERE APPLICABLE AT DATE OF MANUFACTURE. REMOVAL OF THIS PLACARD IS A VIOLATION OF THE LAW

970235786 A (SHEET 4)