


Direct 3.3V host interface – NO power-off signal isolation

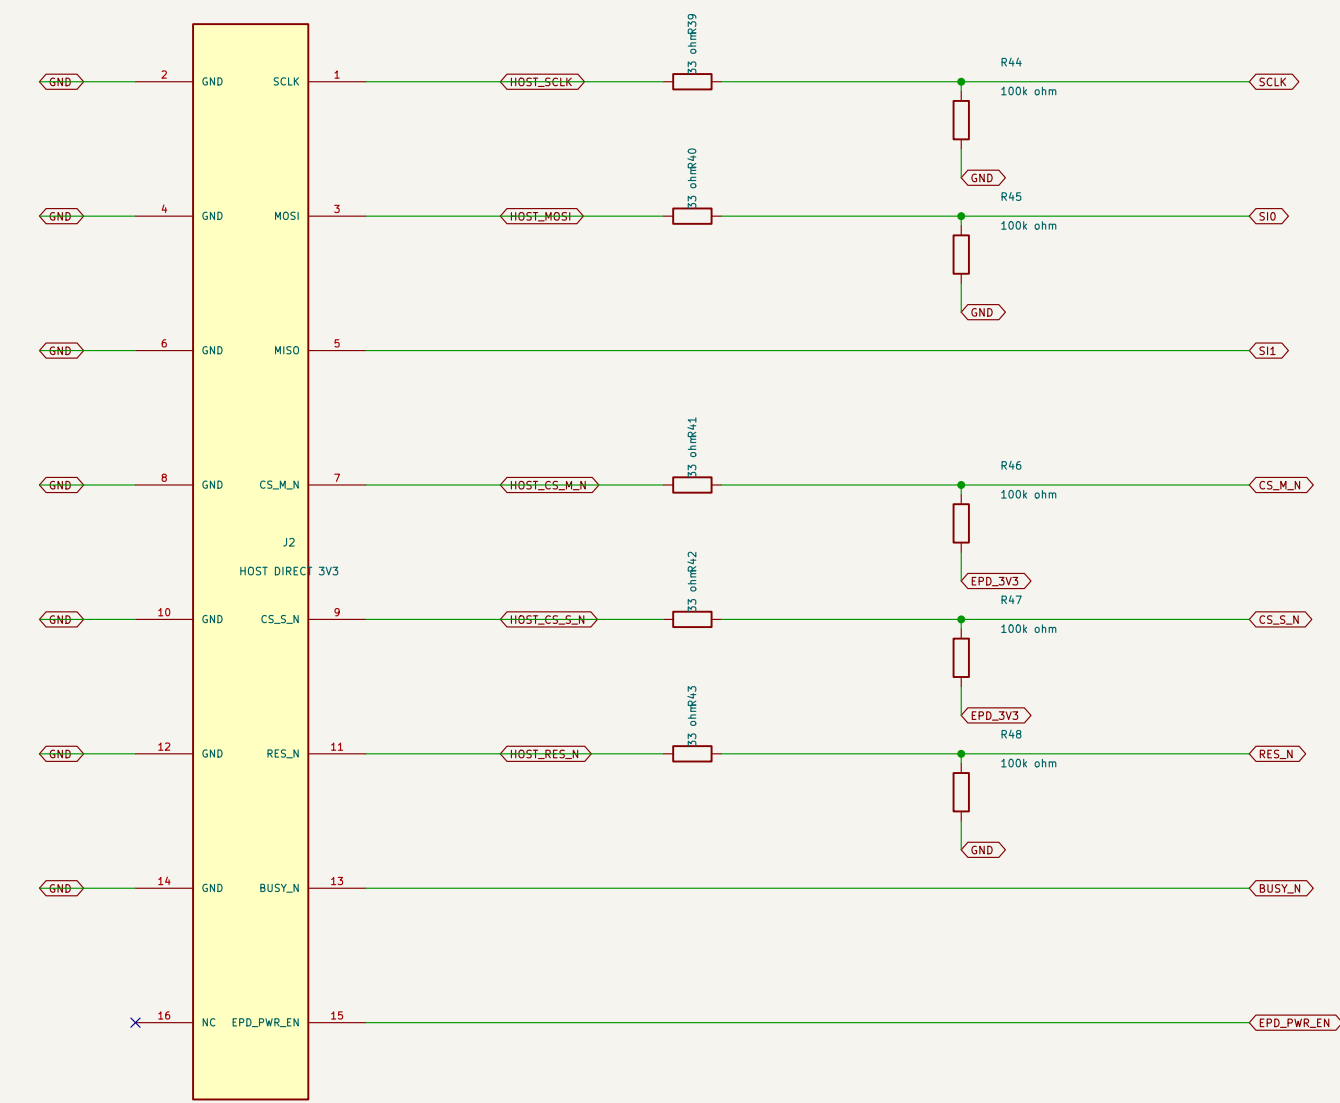

Host first ON / last OFF. Screen OFF: no GPIO HIGH, no pull-ups.

J2.16 unused. No live plugging. Short cable <= 10cm.

Test pads: copper only, no parts to buy or solder

