



	1	2	3	4	5	6
A	Power converters 文件: power.kicad_sch					A
B	Panel and temperature 文件: panel.kicad_sch					B
C	Host interface and test points 文件: interface.kicad_sch					C
D	album Sheet: / File: gdep133c02-driver.kicad_sch Title: GDEP133C02 minimum driver – DRAFT Size: A4 Date: 2026-10-07 Rev: 0.5-GDRC-DEBUG KiCad E.D.A. 10.0.6 Id: 1/4					D
	1	2	3	4	5	6

1 3.3V input / load switch / supply distribution

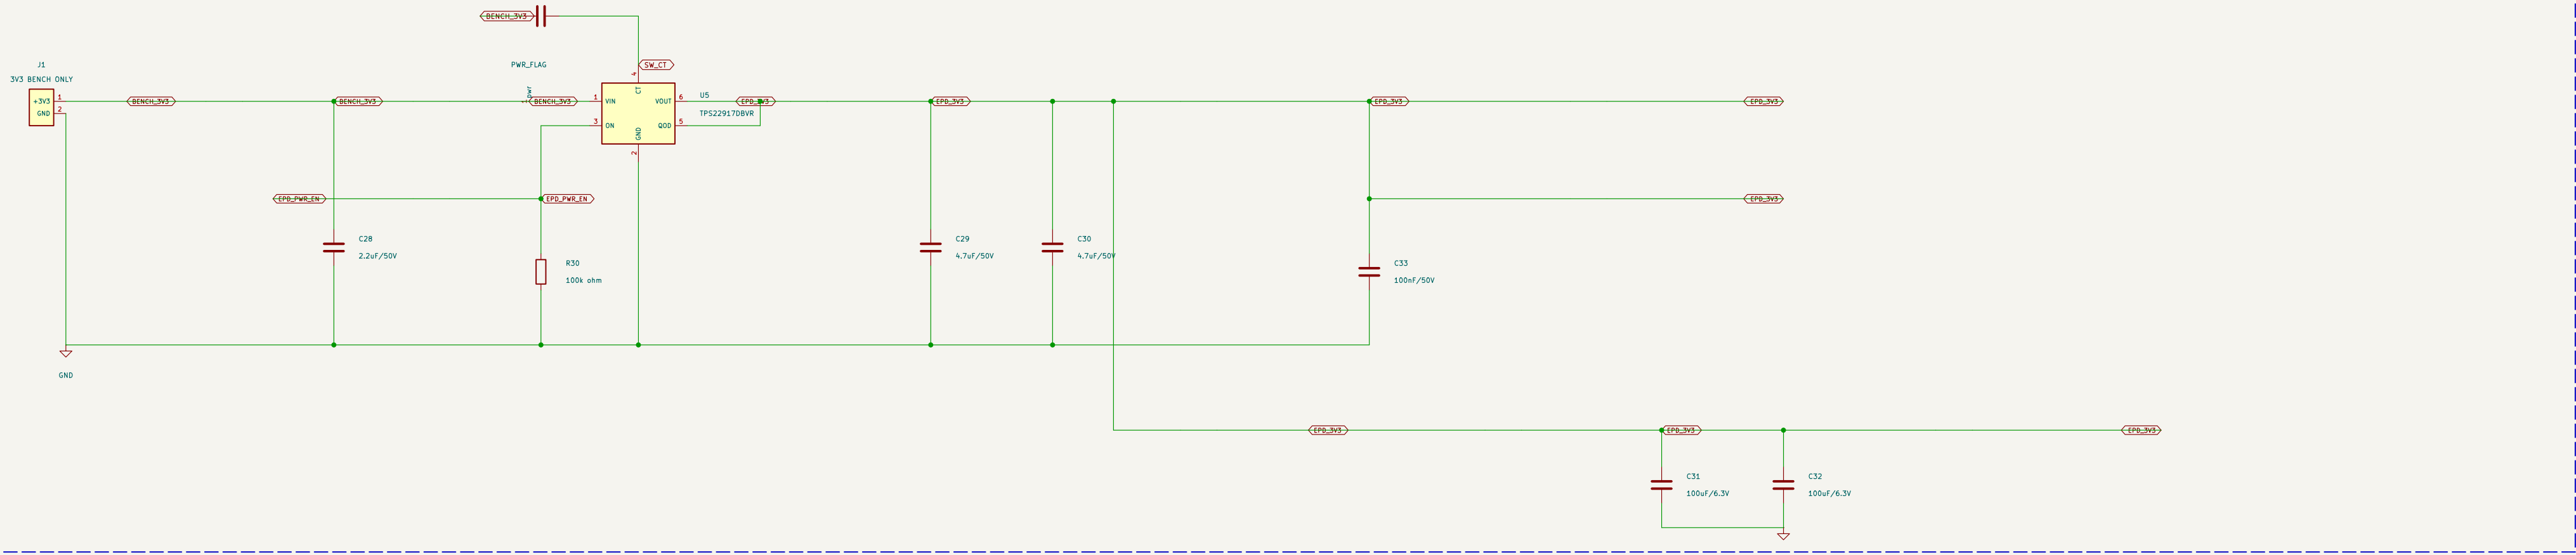


v0.4: U5 output = EPD_3V3; direct copper feeds to logic and power branches


2 Positive source rail (VDDP)

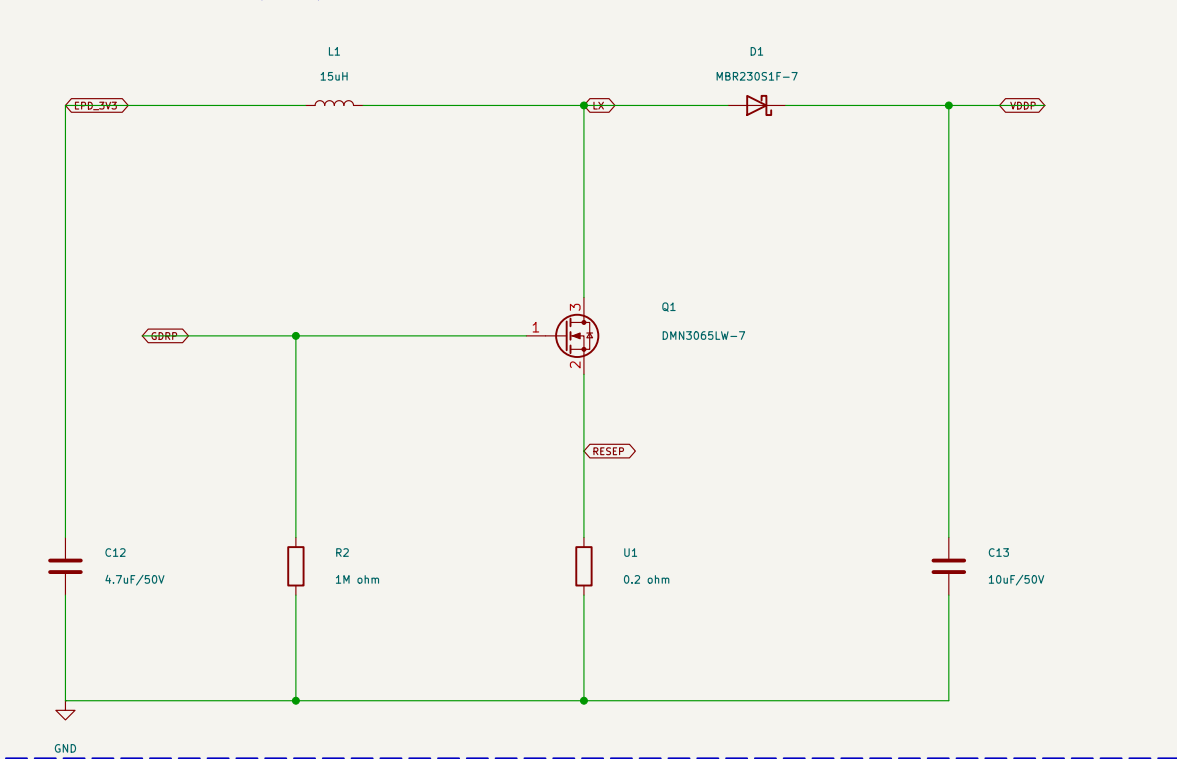


3 Negative source rail (VDDN)

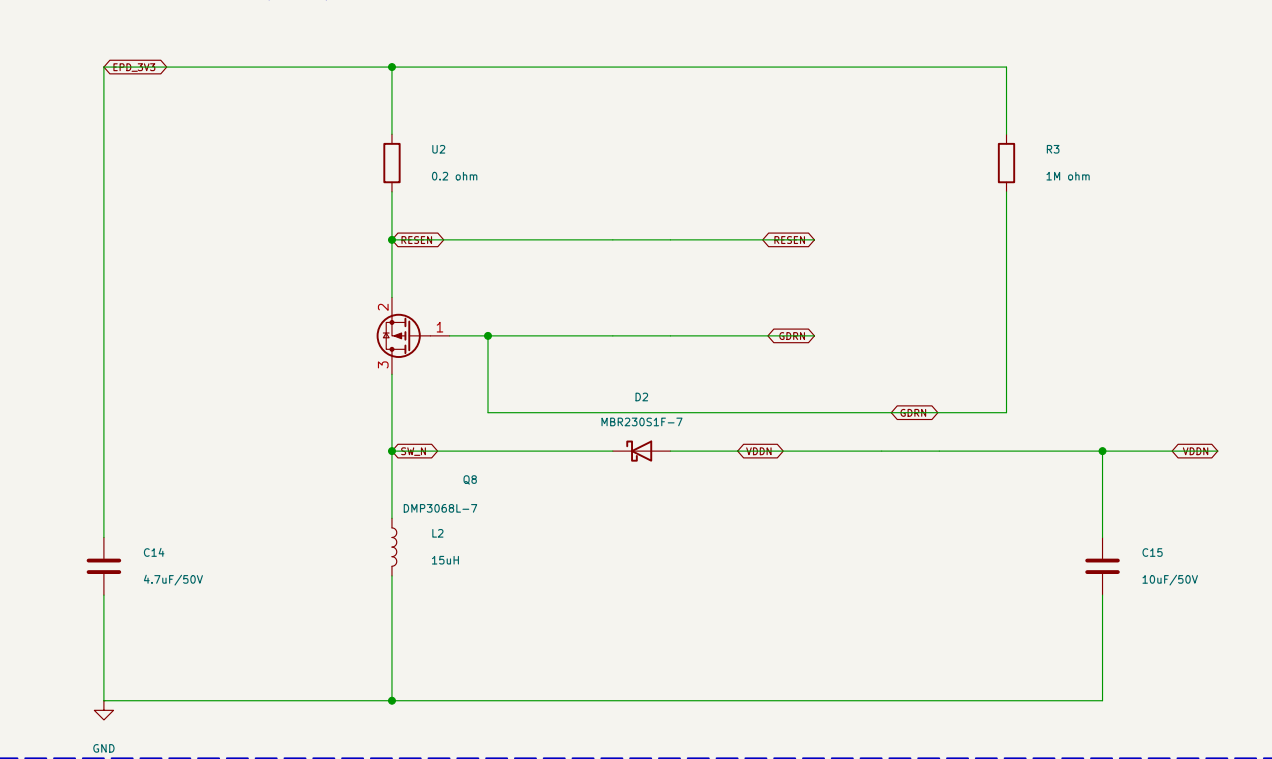


4 VCOM supply branch

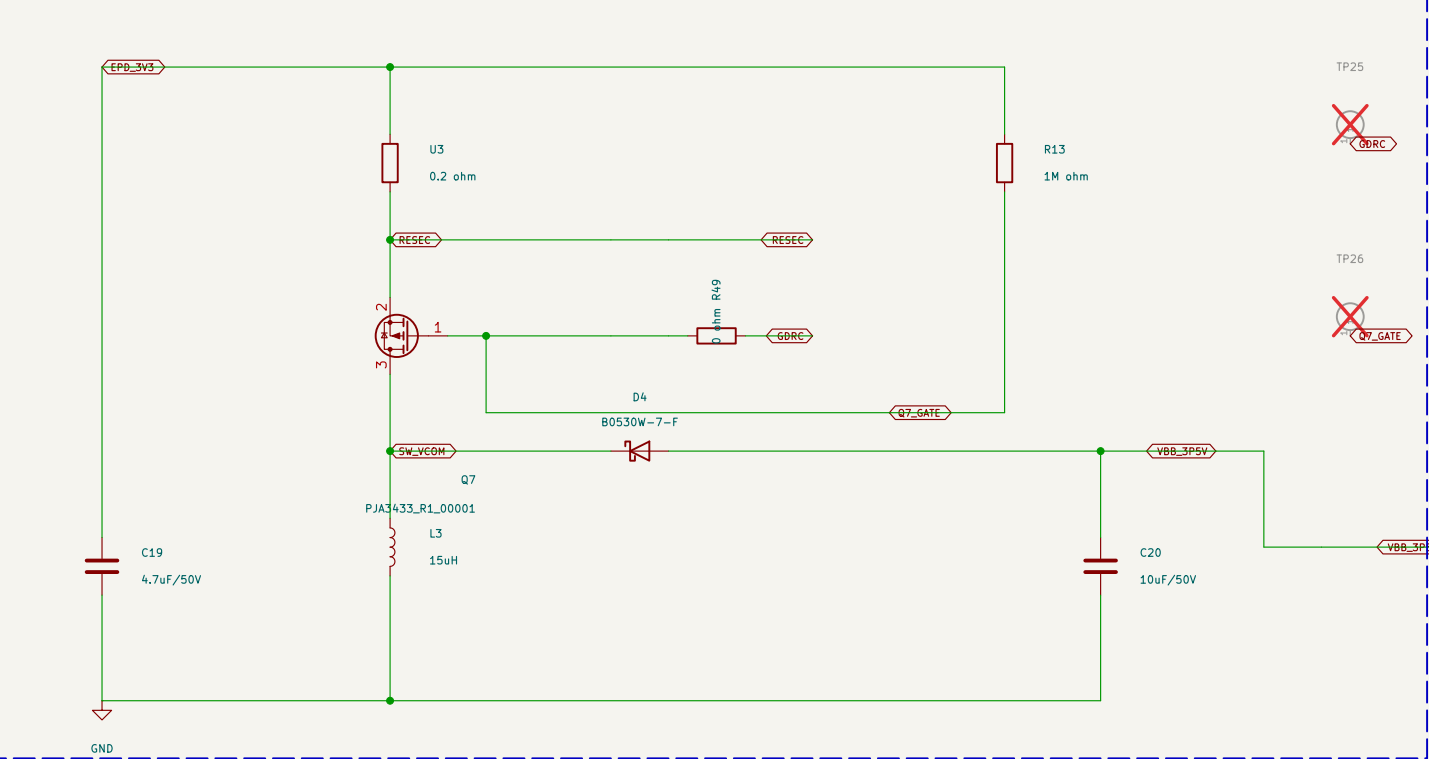


5 Positive gate charge pump (VGH)

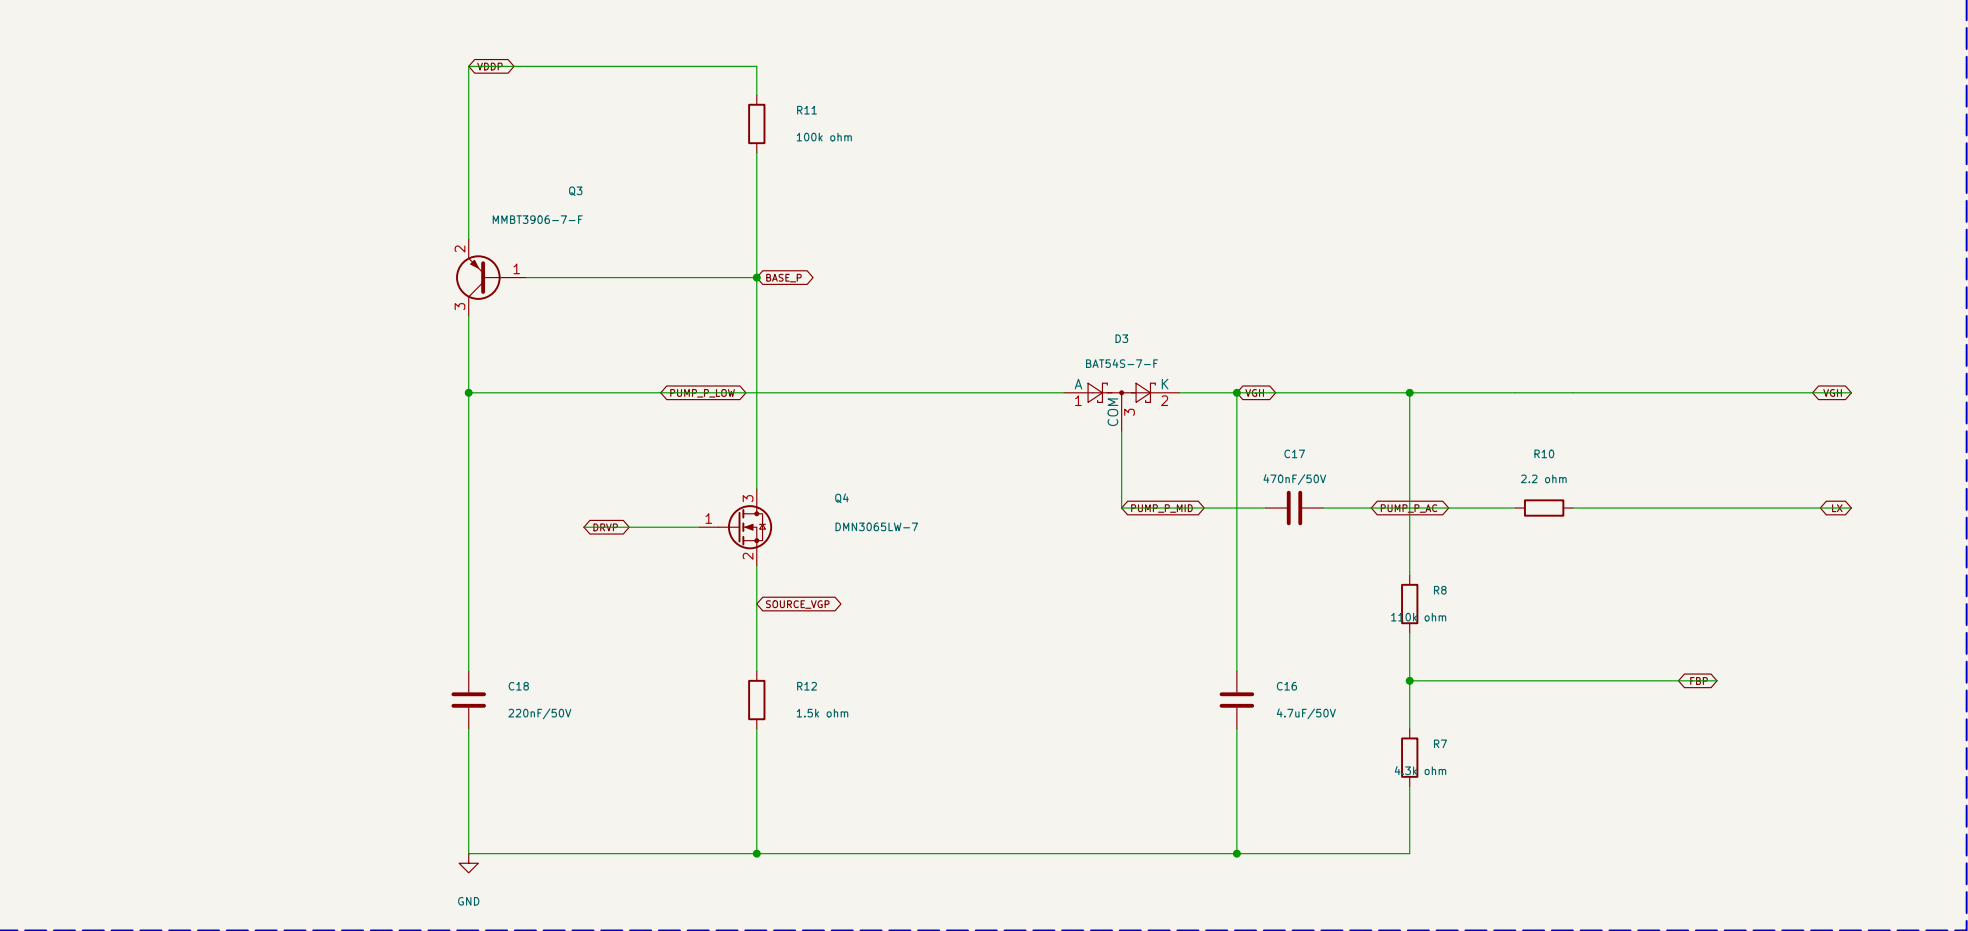


6 Negative gate charge pump (VGL)

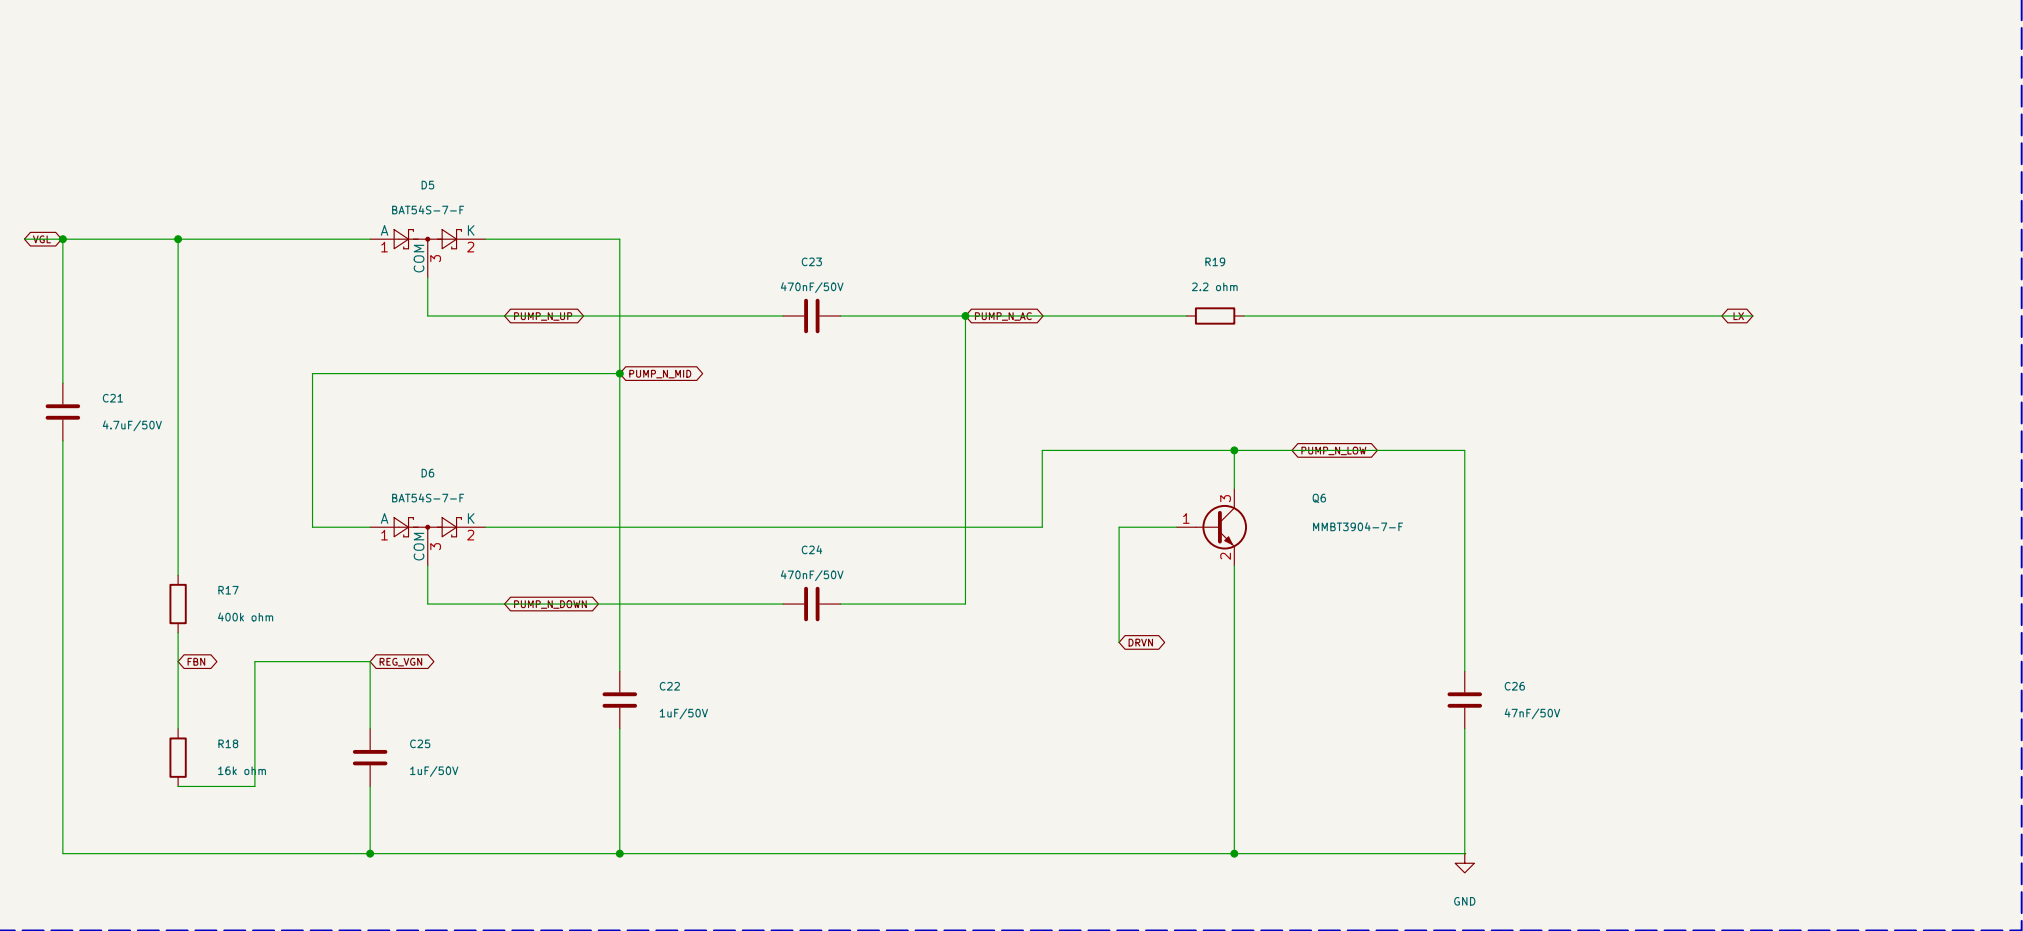

Dots join wires: crossings without dots are not connected. Net labels retain the existing PCB net names.

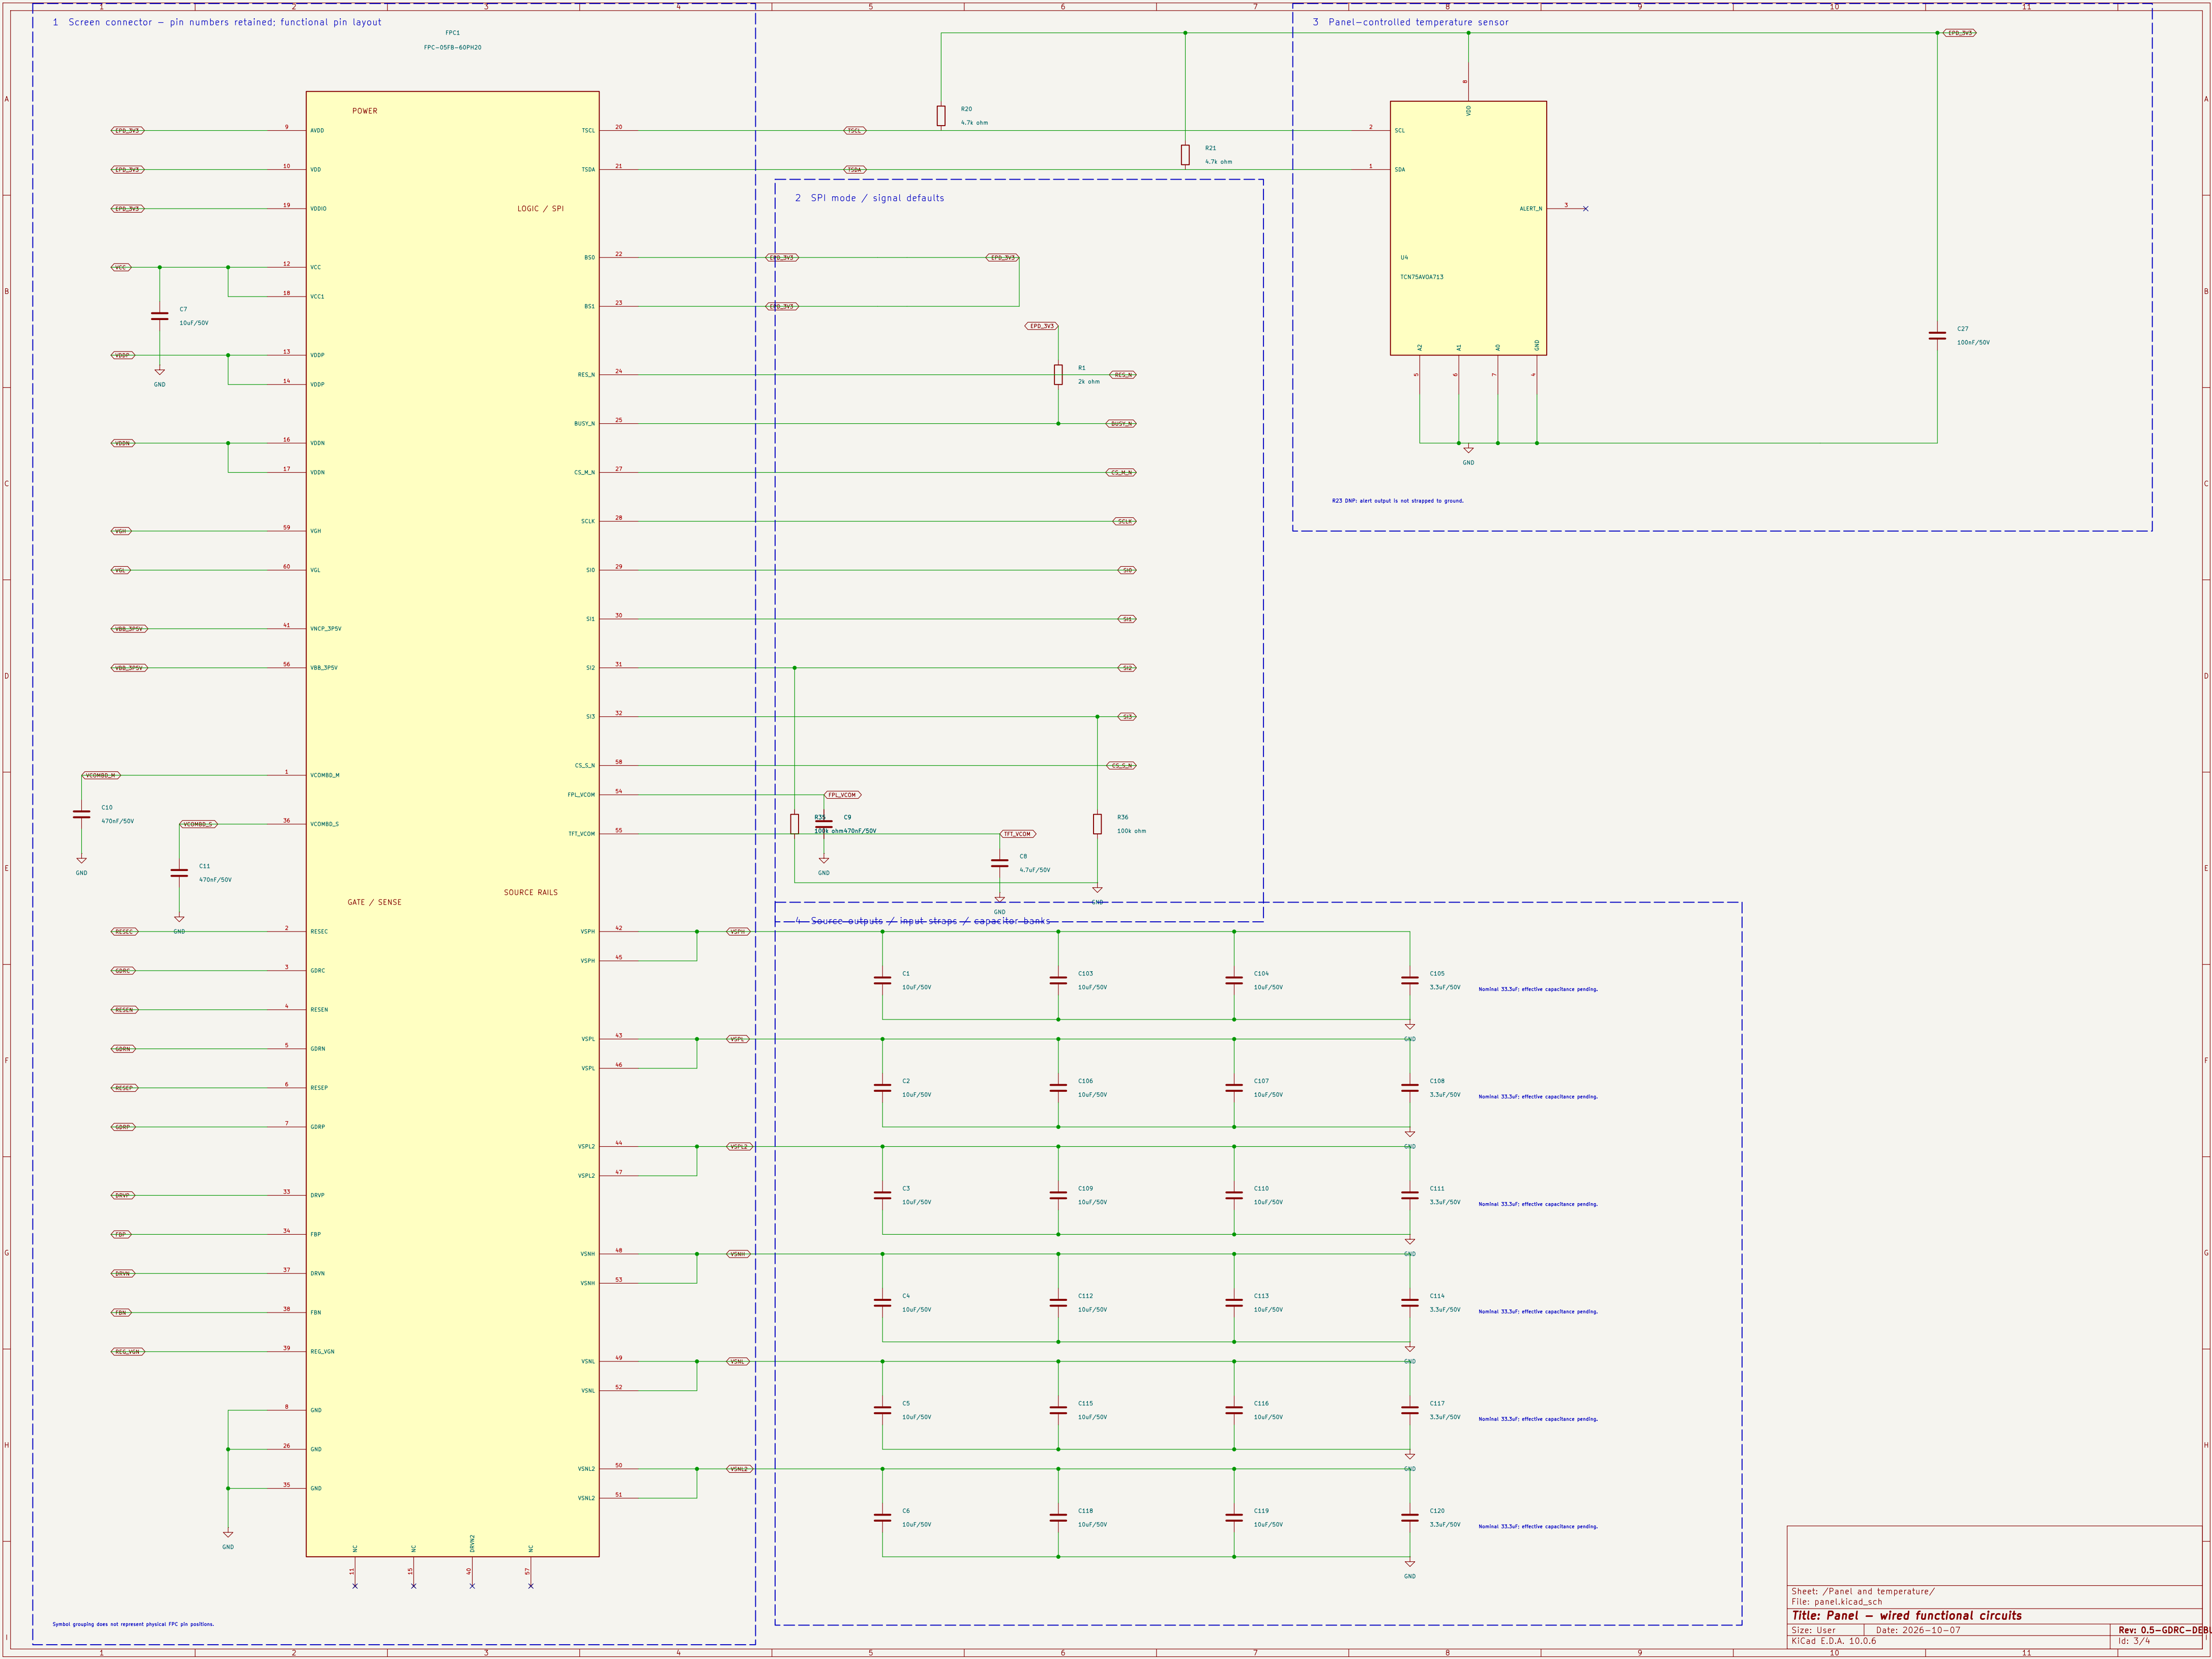

Direct 3.3V host interface – NO power-off signal isolation

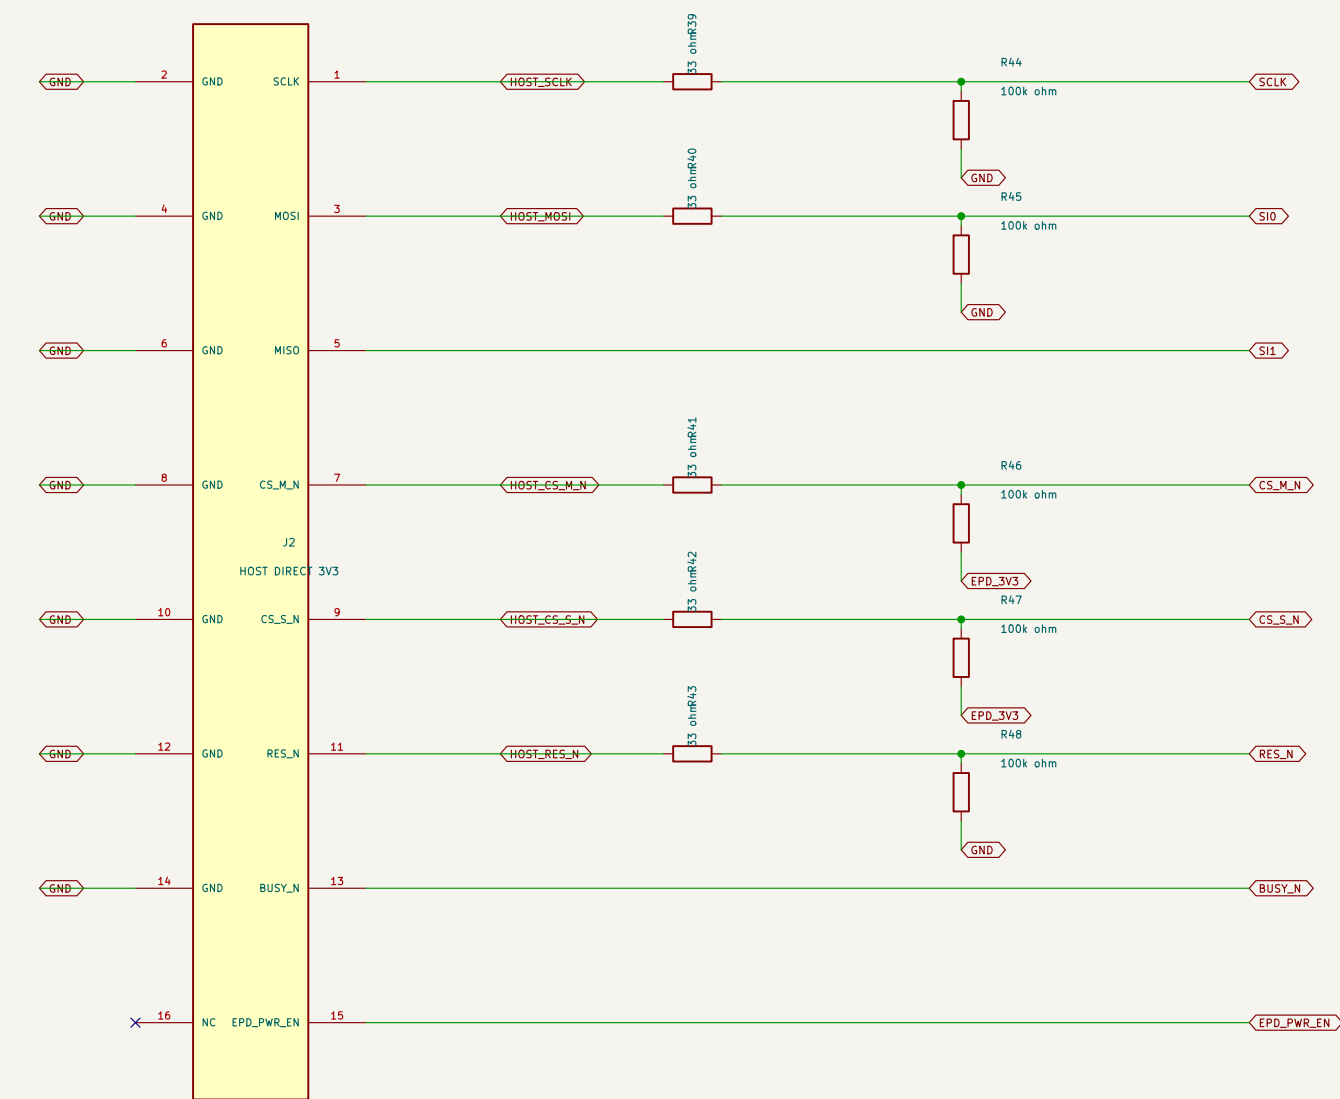

Host first ON / last OFF. Screen OFF: no GPIO HIGH, no pull-ups.

J2.16 unused. No live plugging. Short cable <= 10cm.

Test pads: copper only, no parts to buy or solder

