


Consegna S1/L3

In questo report vedremo la creazione e la configurazione di una rete di calcolatori utilizzando il tool Cisco Packet Tracer.

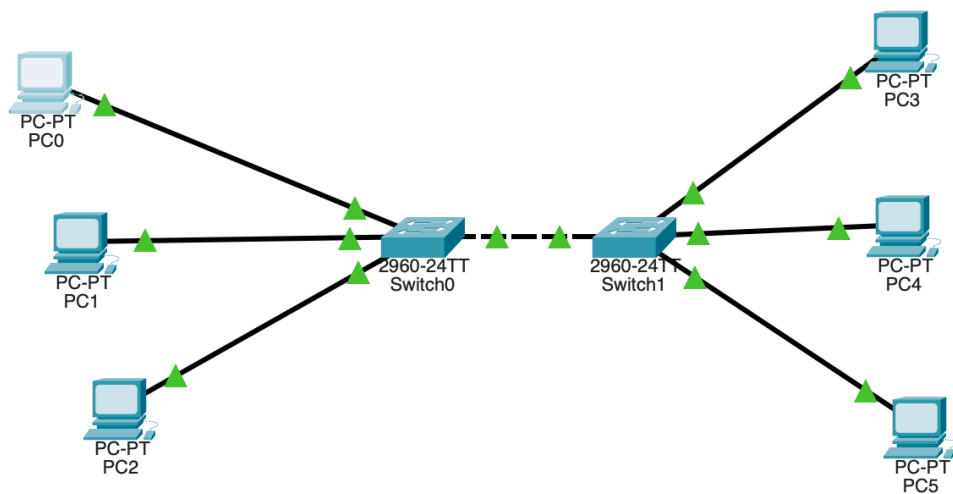

La seguente rete è composta dai seguenti dispositivi:

- 6 Host (PC0...PC5)
- 2 Switch (Switch0...Switch1)
- Come possiamo vedere:
 - Da PC0 a PC2, sono connessi al primo Switch (Switch0)
 - Da PC3 a PC5, sono connessi al secondo Switch (Switch1)

Configurazione Host

- PC0 (192.168.0.2)
- PC1 (192.168.0.3)
- PC2 (192.168.0.4)
- PC3 (192.168.0.5)
- PC4 (192.168.0.6)
- PC5 (192.168.0.7)

Ping

Ping da PC0 a PC1


```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:

Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time=12ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 12ms, Average = 3ms
```

Ping da PC3 a PC4

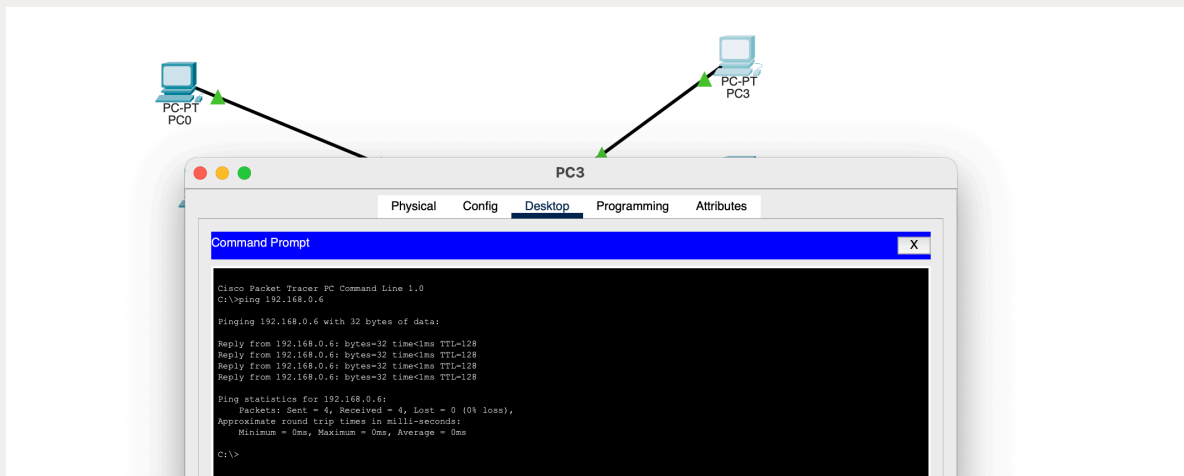

Ping da PC0 a PC3

