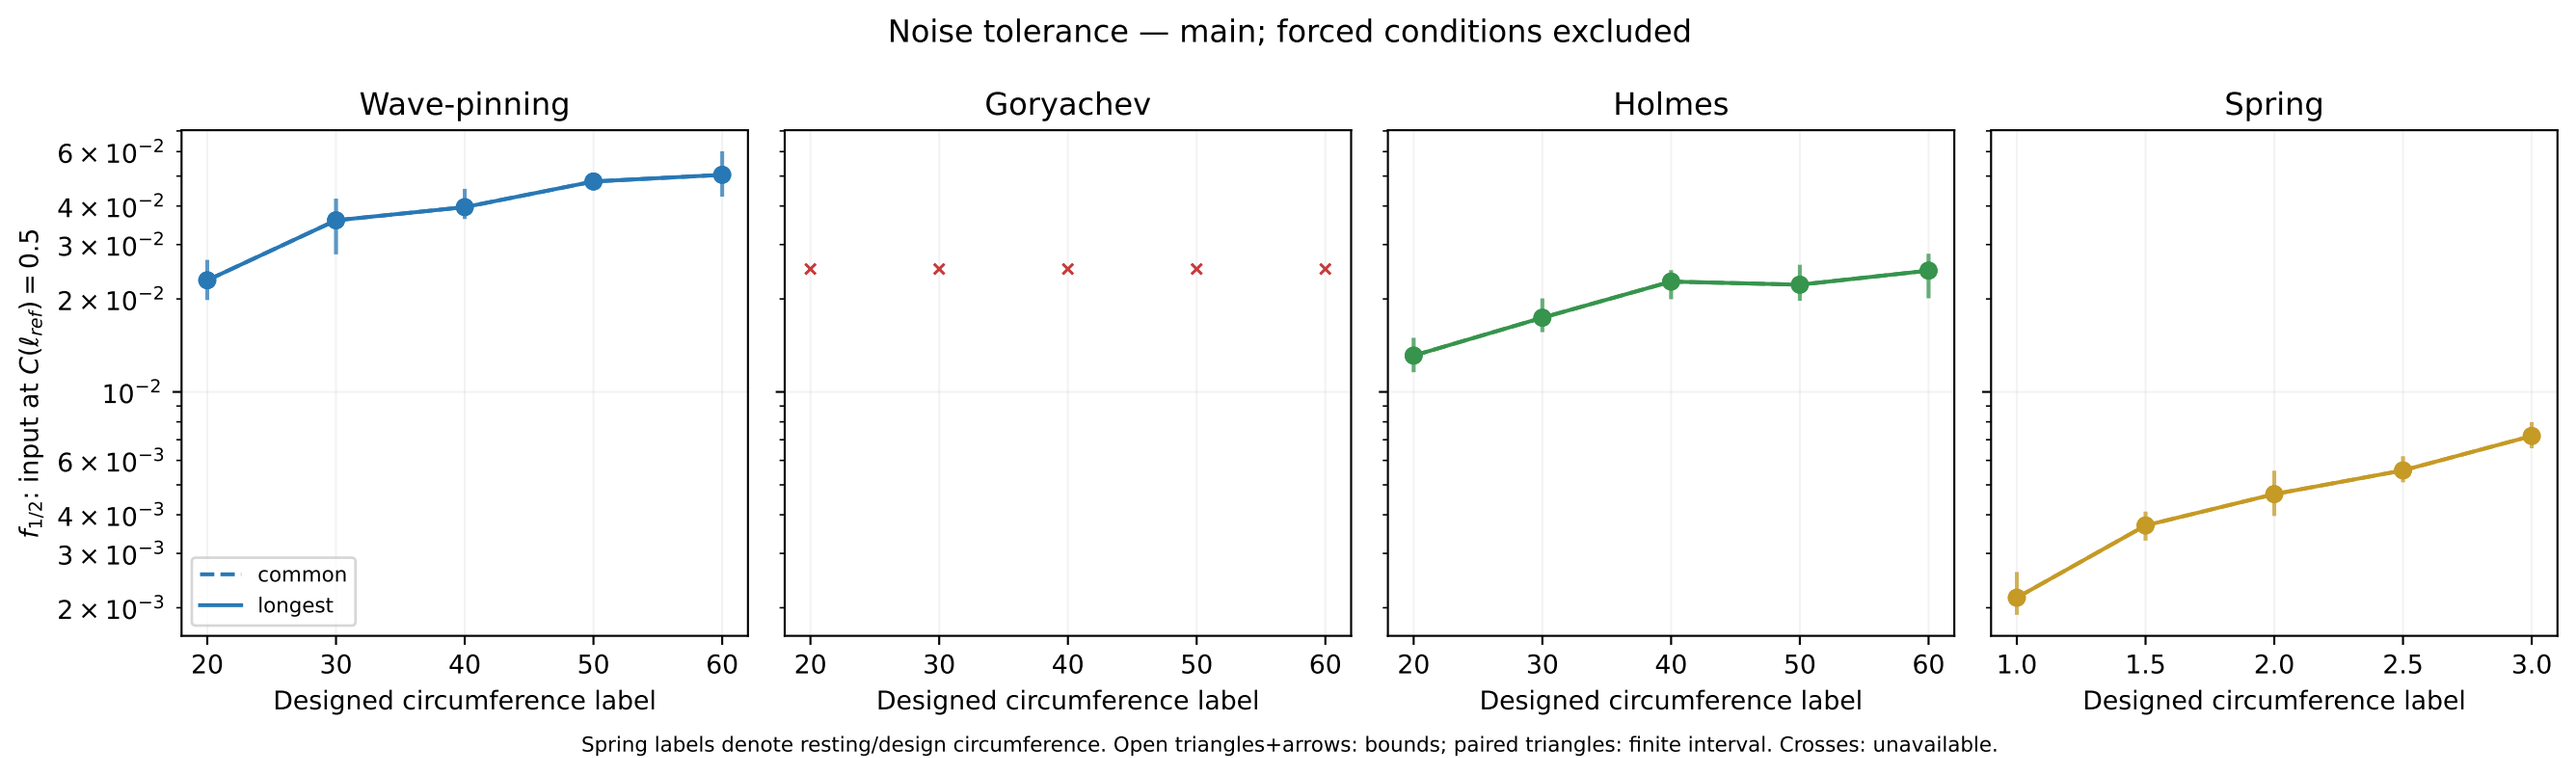
Noise tolerance — main; forced conditions excluded
Wave-pinning
Goryachev
Holmes
Spring
$f_{1/2}$: input at $C(\ell_{ref}) = 0.5$
6×10^{-2}
4×10^{-2}
3×10^{-2}
2×10^{-2}
10^{-2}
6×10^{-3}
4×10^{-3}
3×10^{-3}
2×10^{-3}
common
longest
20
30
40
50
60
1.0
1.5
2.0
2.5
3.0
Designed circumference label
Spring labels denote resting/design circumference. Open triangles+arrows: bounds; paired triangles: finite interval. Crosses: unavailable.