
Qualified narrow-range design: internal, edge and outside cues

All 129 frozen placements on the actual 12 basals; 645 cue-duration conditions. No parameters or basals are retuned.

Bars: full physical support. Dots: cue centres. Colours classify the whole footprint against the initial 10%-contrast region.

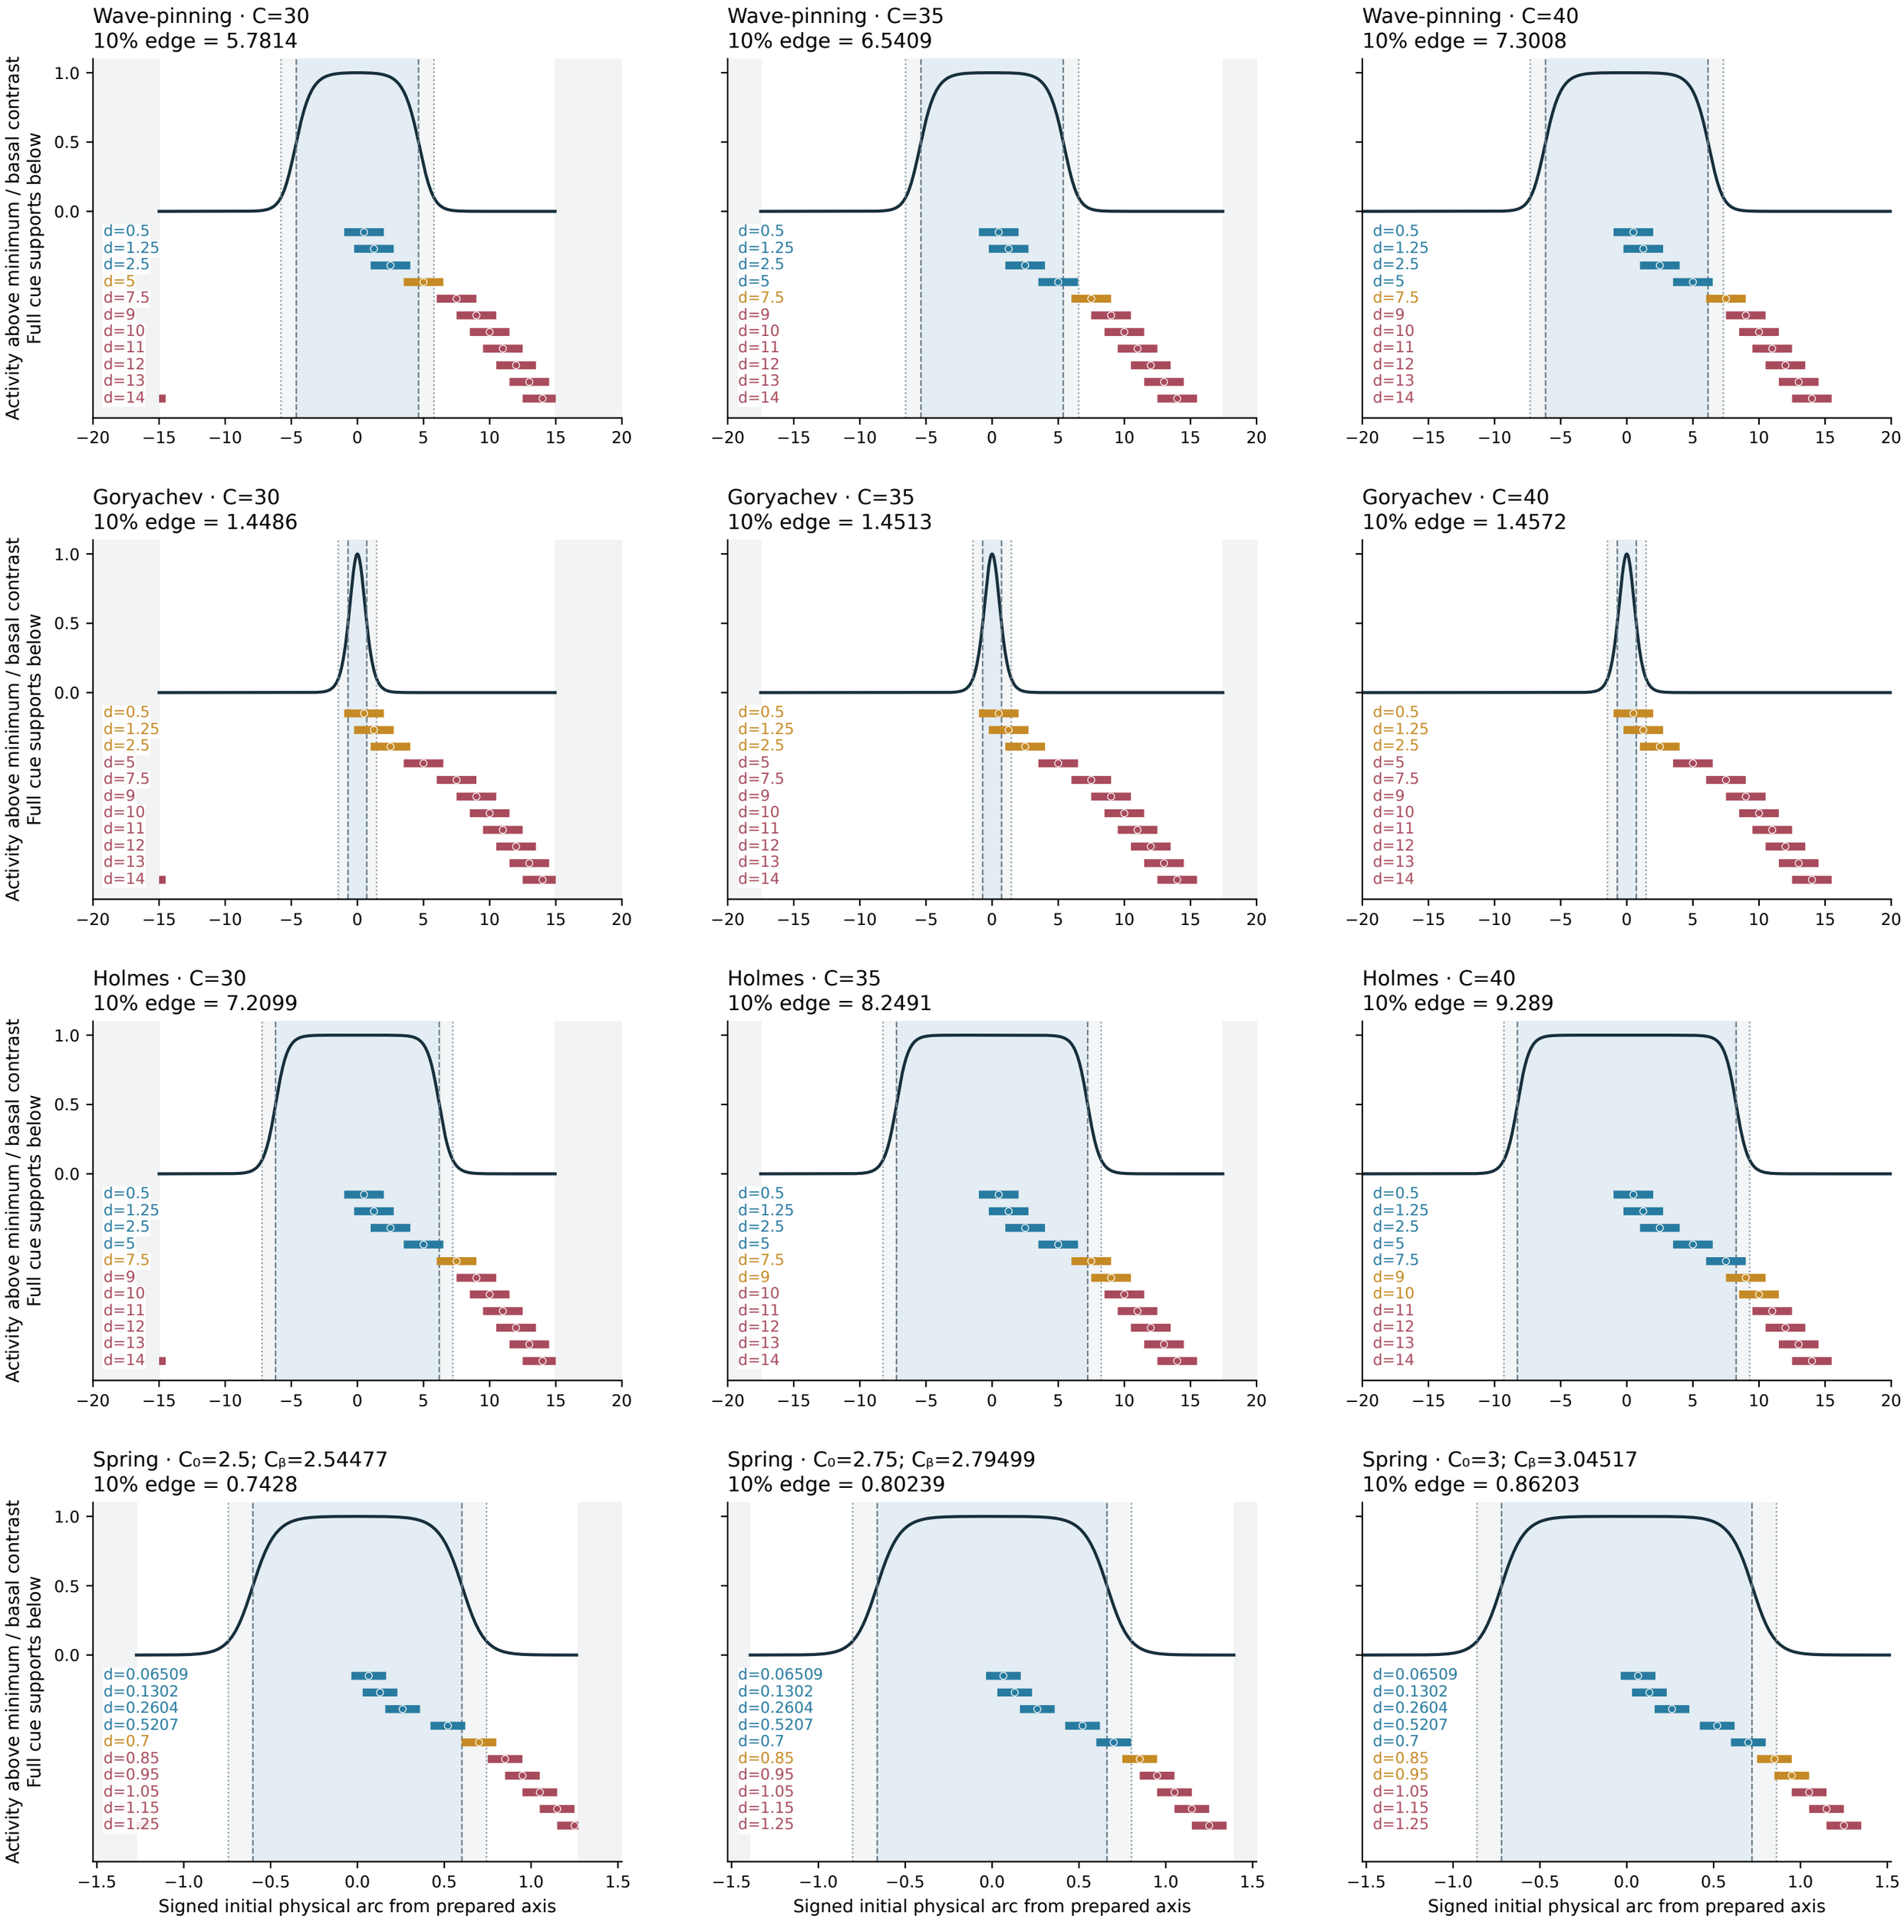

Inside support **Straddling support** **Outside support**

Black profile: [u − min(u)] / [max(u) − min(u)]. Dashed edges: 50%; dotted edges: 10%. These are operational activity thresholds.

Common physical x scales within model rows; grey outer areas lie beyond smaller rings. Supports wrap periodically near the antipode.

Spring distances are initial physical arcs of stationary material centres; subsequent physical arcs vary with C(t). No site ancestry or cell-motion claim.