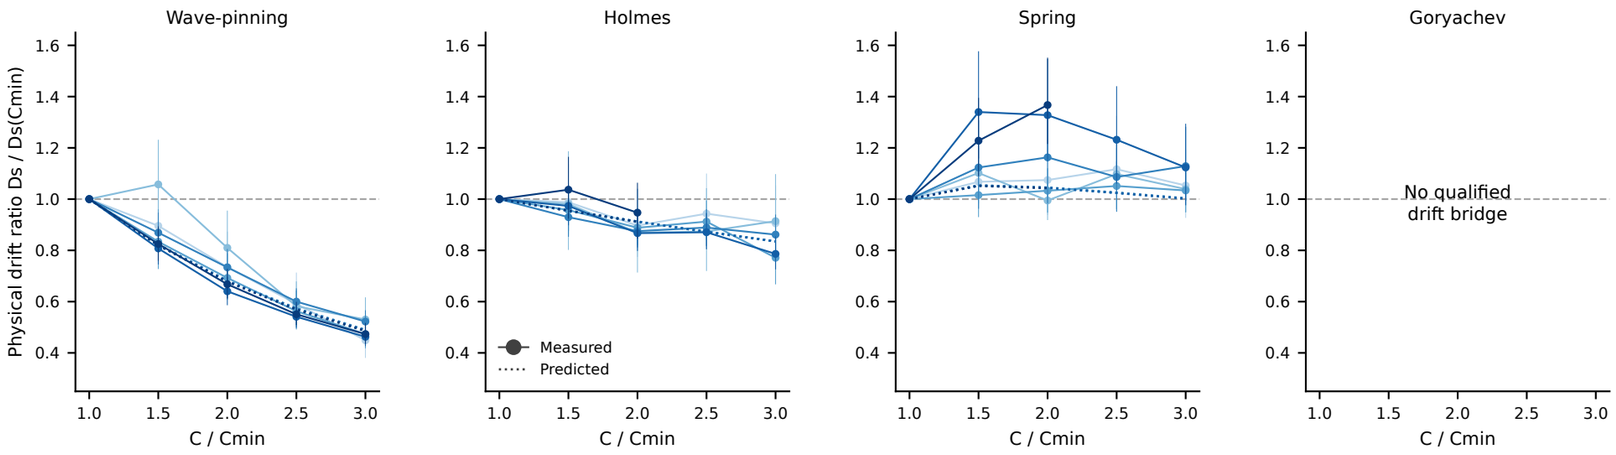
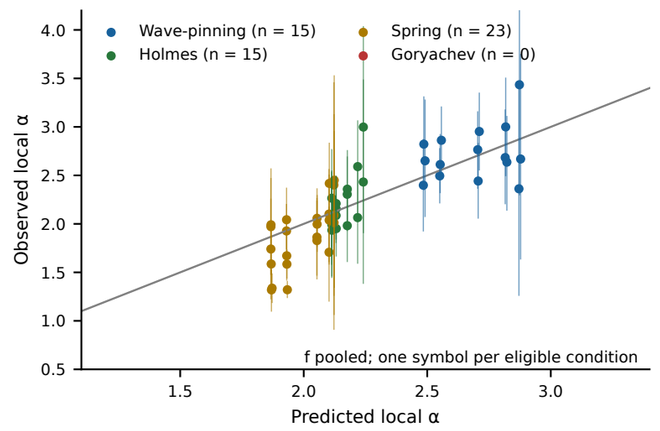
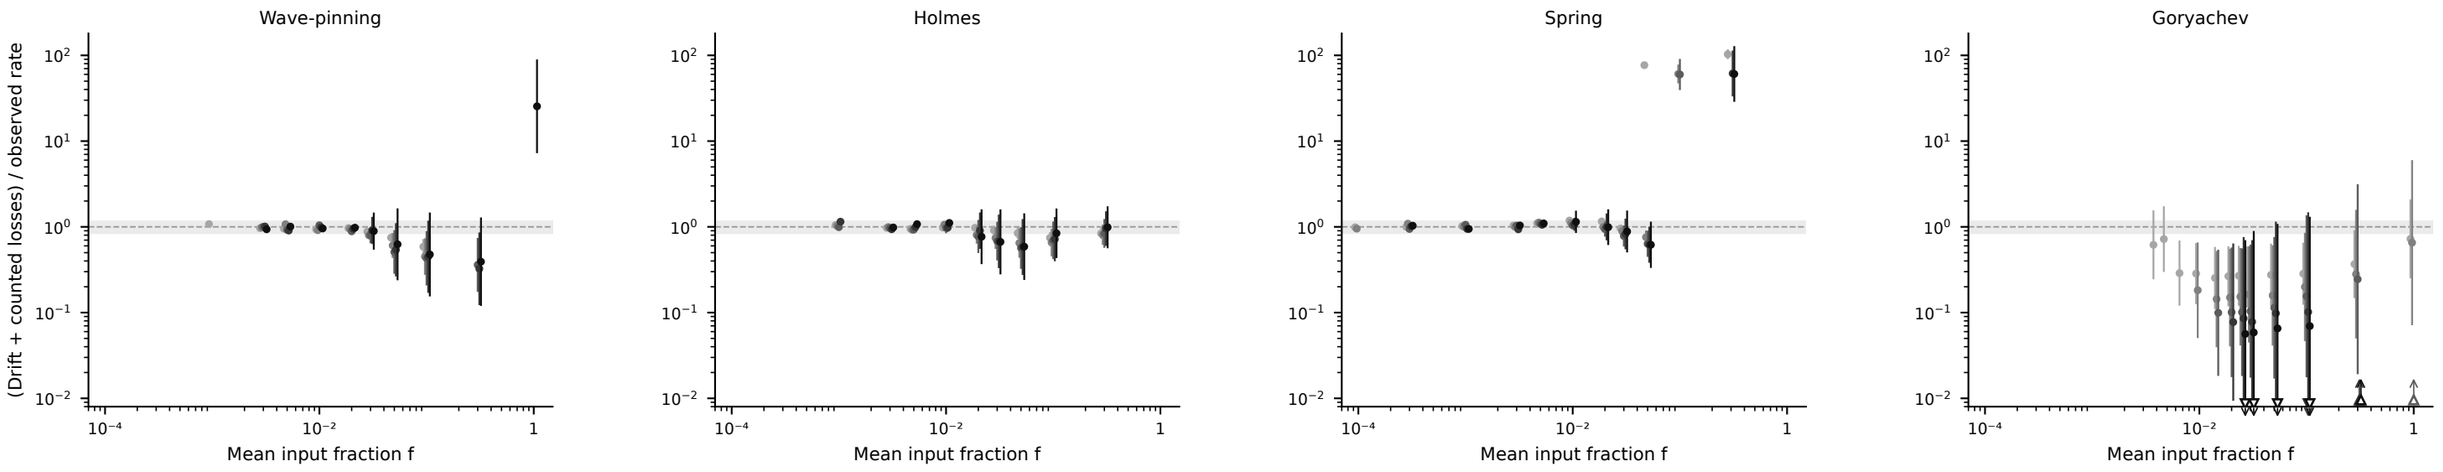
A


Wave-pinning
Holmes
Spring
Goryachev
Physical drift ratio Ds / Ds(Cmin)
C / Cmin
Measured
Predicted
No qualified
drift bridge


B


Wave-pinning (n = 15)
Holmes (n = 15)
Spring (n = 23)
Goryachev (n = 0)
Observed local α
Predicted local α
f pooled; one symbol per eligible condition


C


Wave-pinning
Holmes
Spring
Goryachev
(Drift + counted losses) / observed rate
Mean input fraction f


D

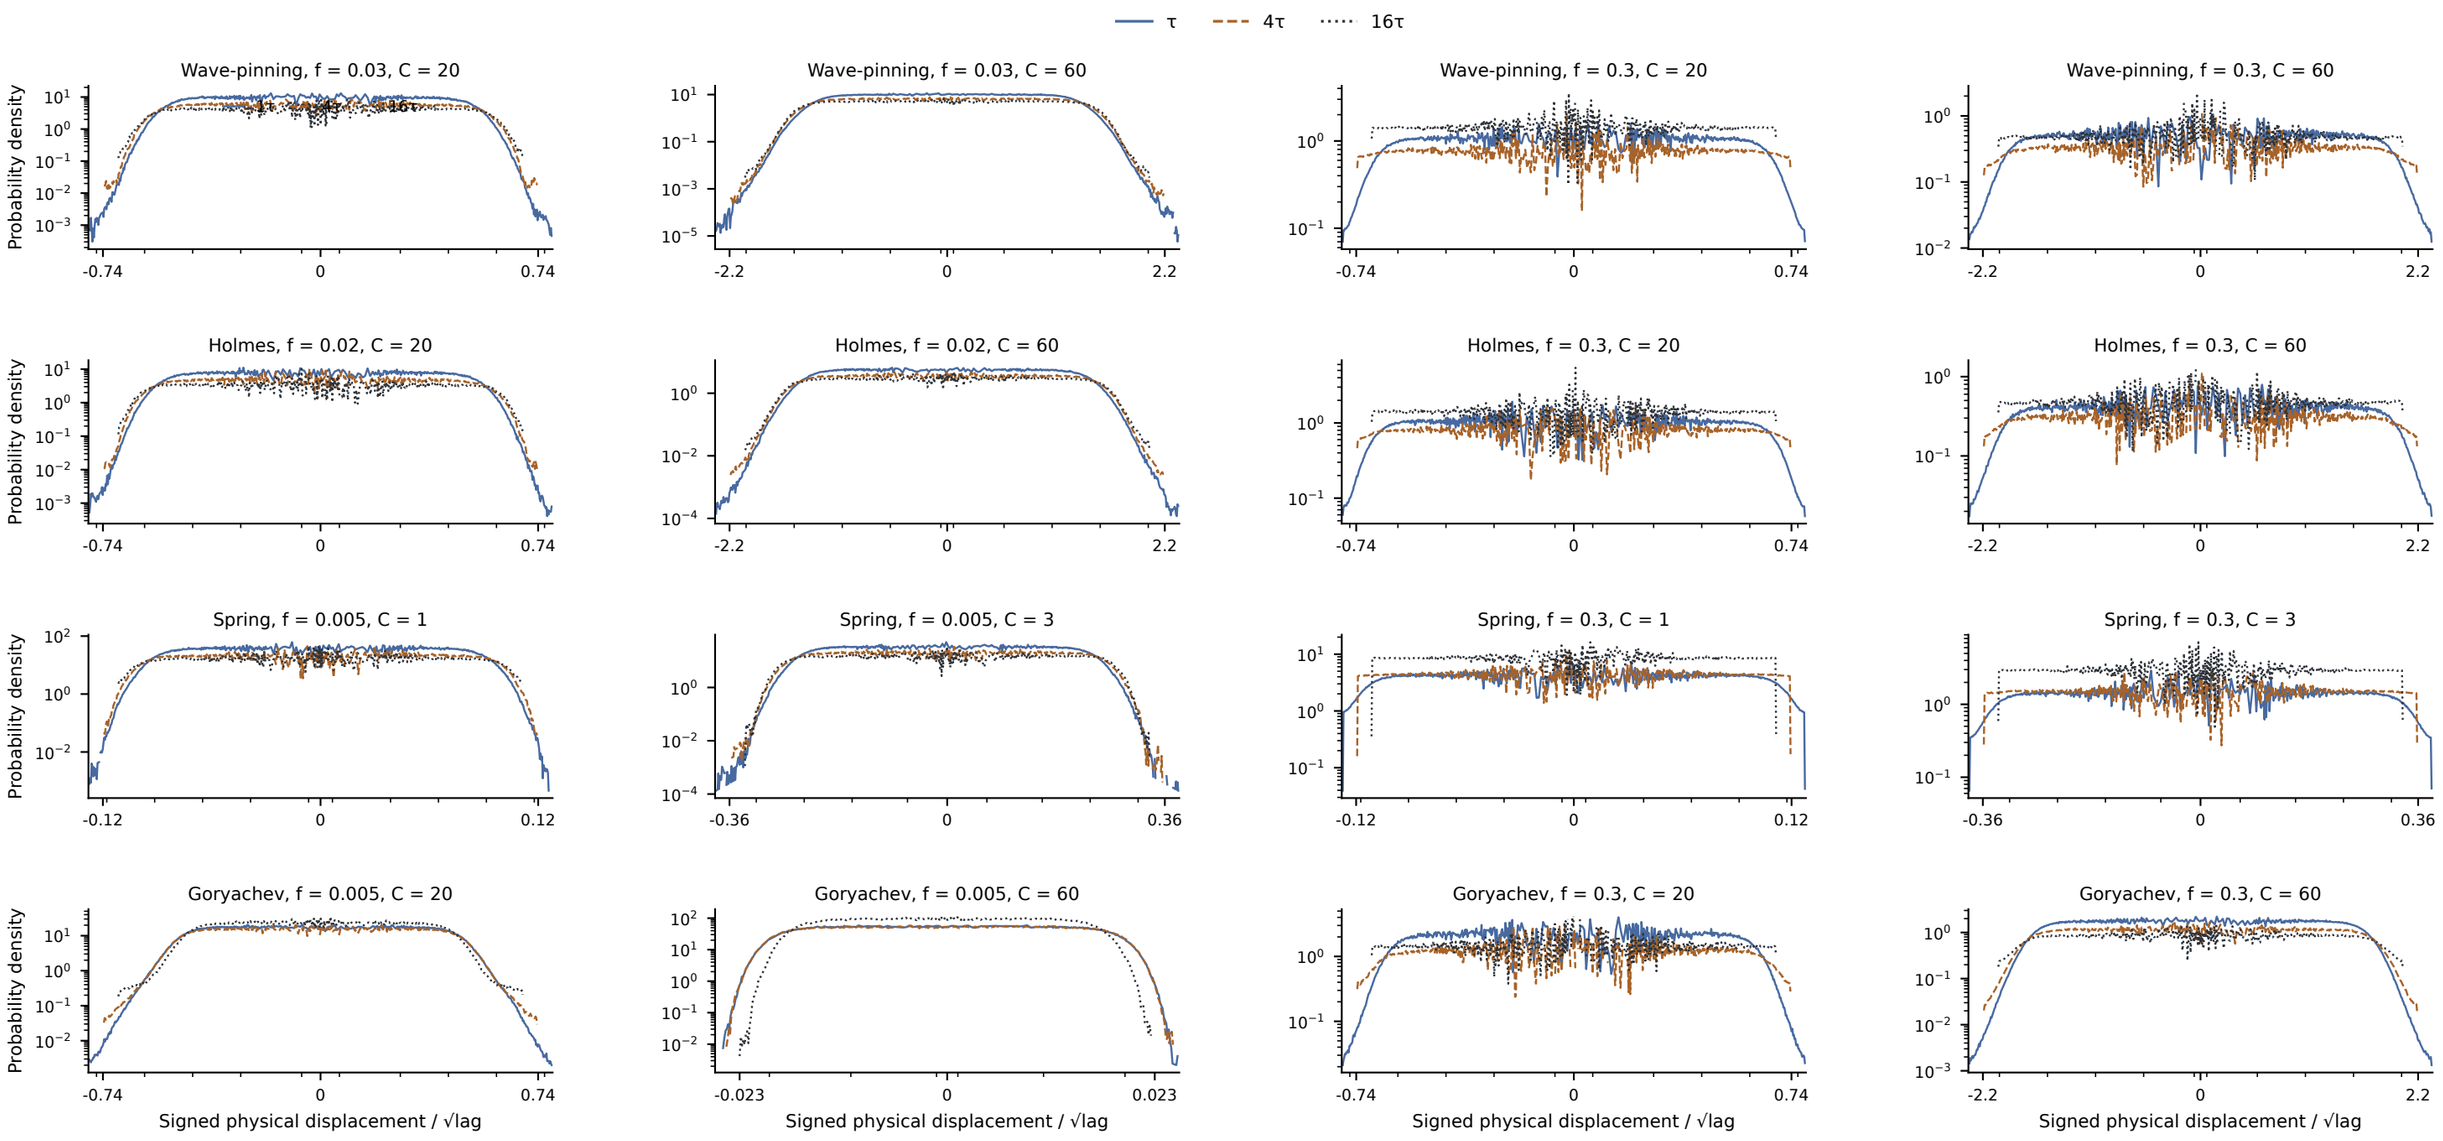
τ
4τ
16τ
Wave-pinning, f = 0.03, C = 20
Wave-pinning, f = 0.03, C = 60
Wave-pinning, f = 0.3, C = 20
Wave-pinning, f = 0.3, C = 60
Holmes, f = 0.02, C = 20
Holmes, f = 0.02, C = 60
Holmes, f = 0.3, C = 20
Holmes, f = 0.3, C = 60
Spring, f = 0.005, C = 1
Spring, f = 0.005, C = 3
Spring, f = 0.3, C = 1
Spring, f = 0.3, C = 3
Goryachev, f = 0.005, C = 20
Goryachev, f = 0.005, C = 60
Goryachev, f = 0.3, C = 20
Goryachev, f = 0.3, C = 60
Probability density
Signed physical displacement / √lag

E

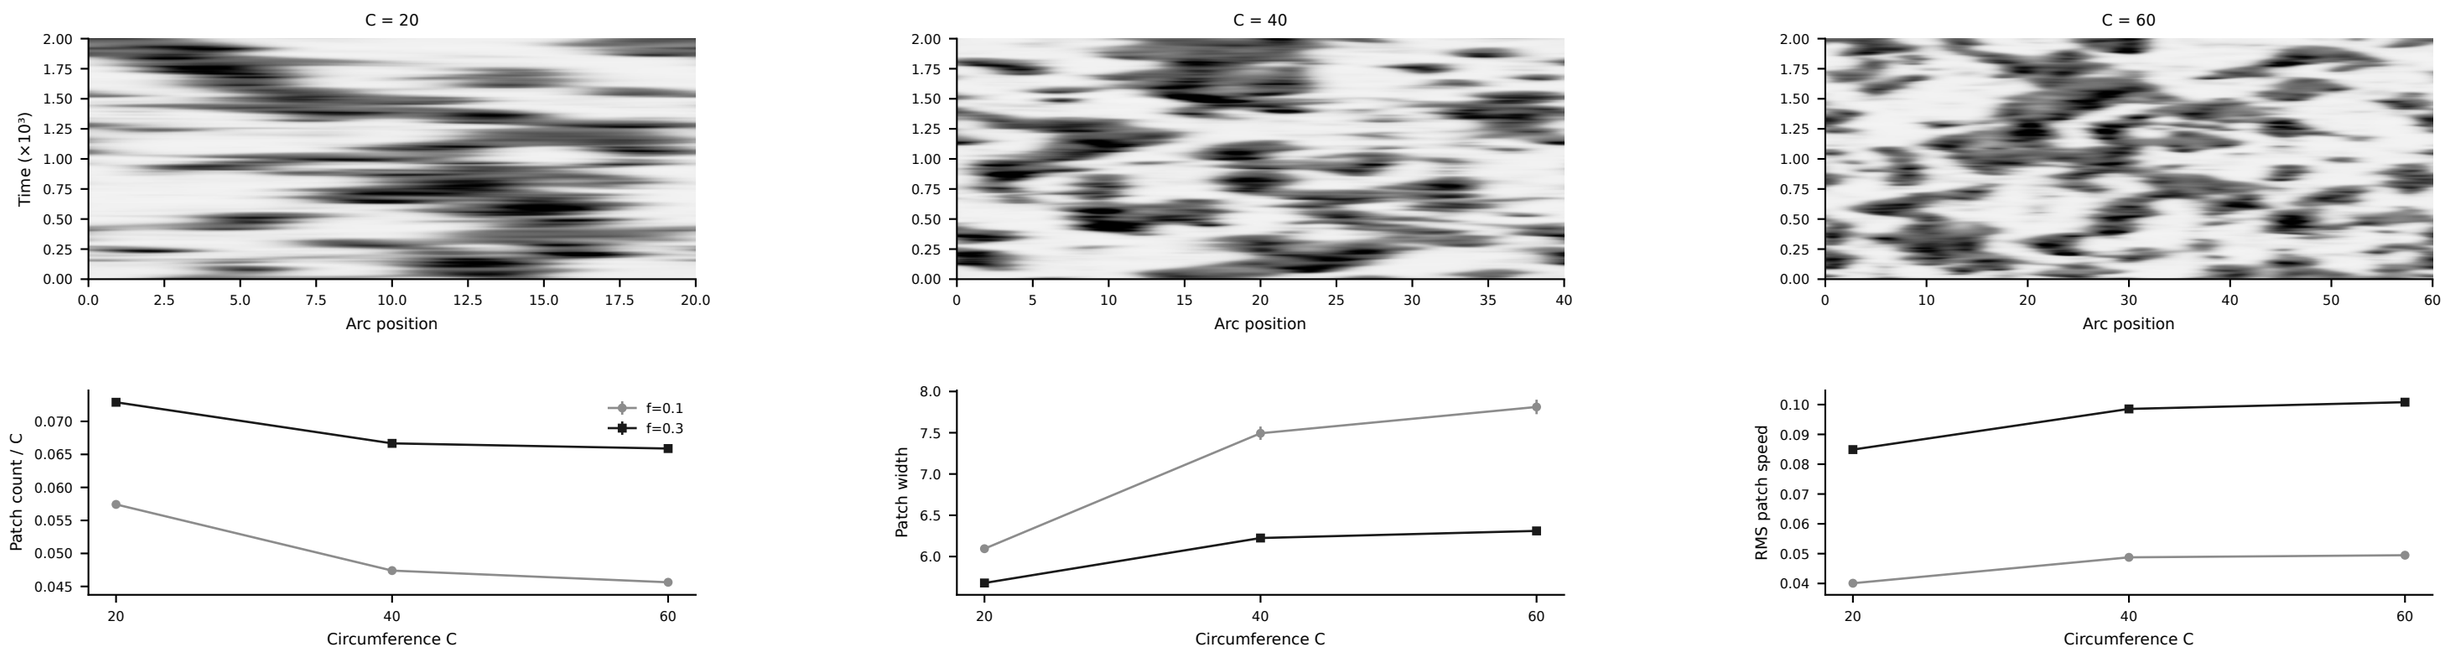
C = 20
C = 40
C = 60
Time (×10³)
Arc position
Patch count / C
Patch width
RMS patch speed
f=0.1
f=0.3
Circumference C

F

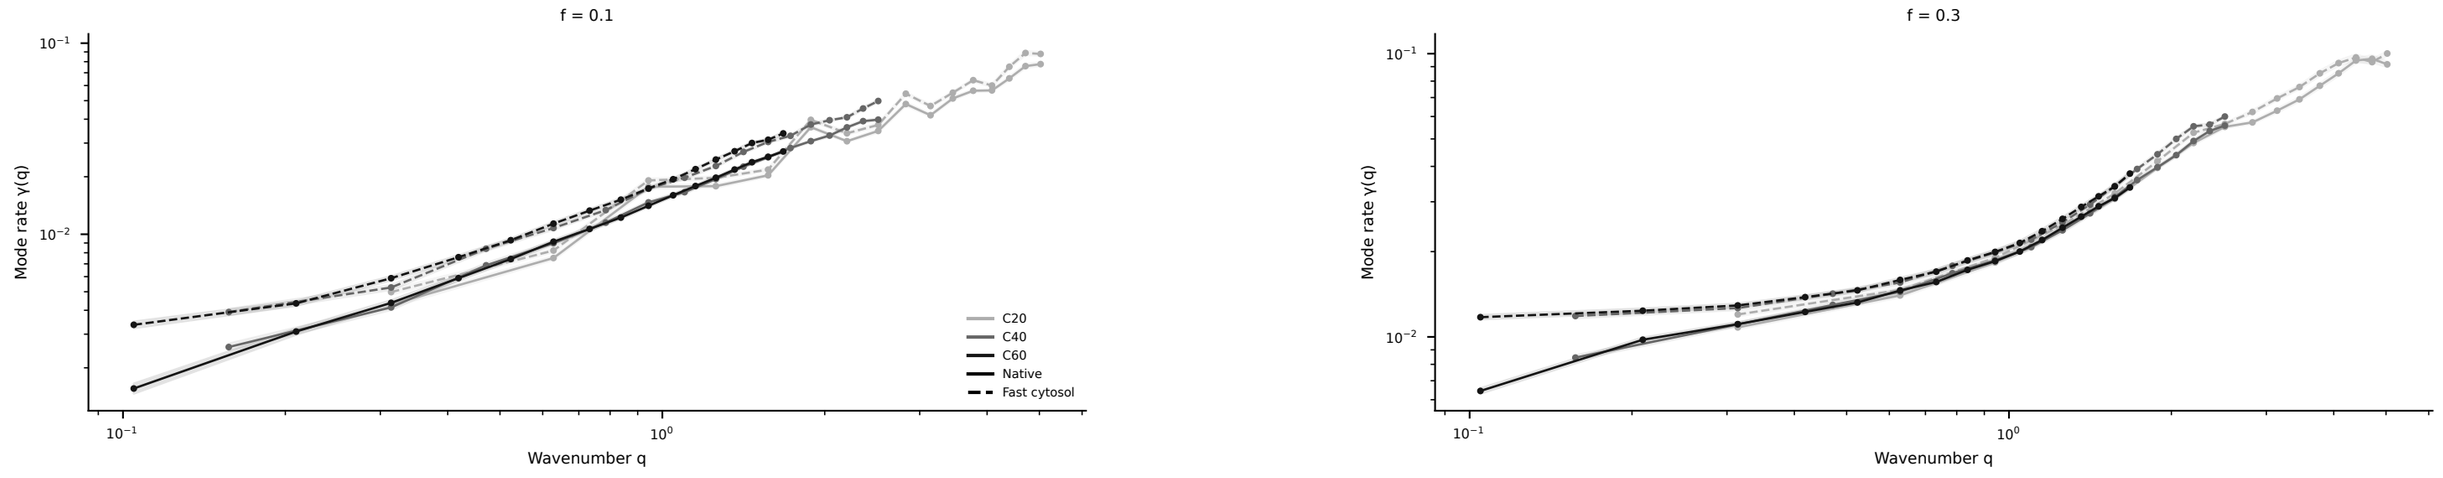
f = 0.1
f = 0.3
Mode rate γ(q)
Wavenumber q
C20
C40
C60
Native
Fast cytosol