



(a) inference: one forward pass, no folded circuits

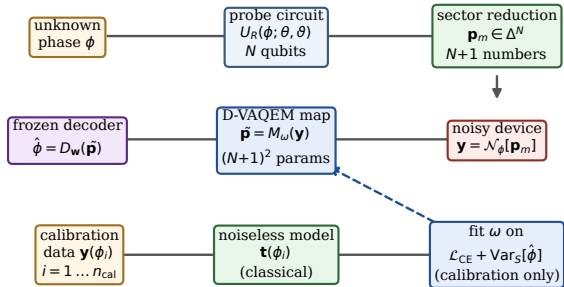


no noise-model knowledge; $N+1$ numbers per phase
instead of 2^N outcomes or 4^N tomography coefficients

(b) $\phi = 0.6$ rad, depol 0.01

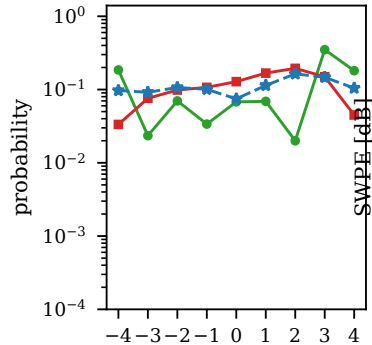

noiseless $\mathbf{p}_m$ noisy $\mathbf{y}$ mitigated $M_{\omega}(\mathbf{y})$

(c)

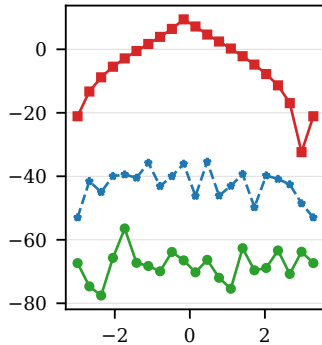

noiseless data mitigated $M_{\omega}(\mathbf{y})$
noisy device