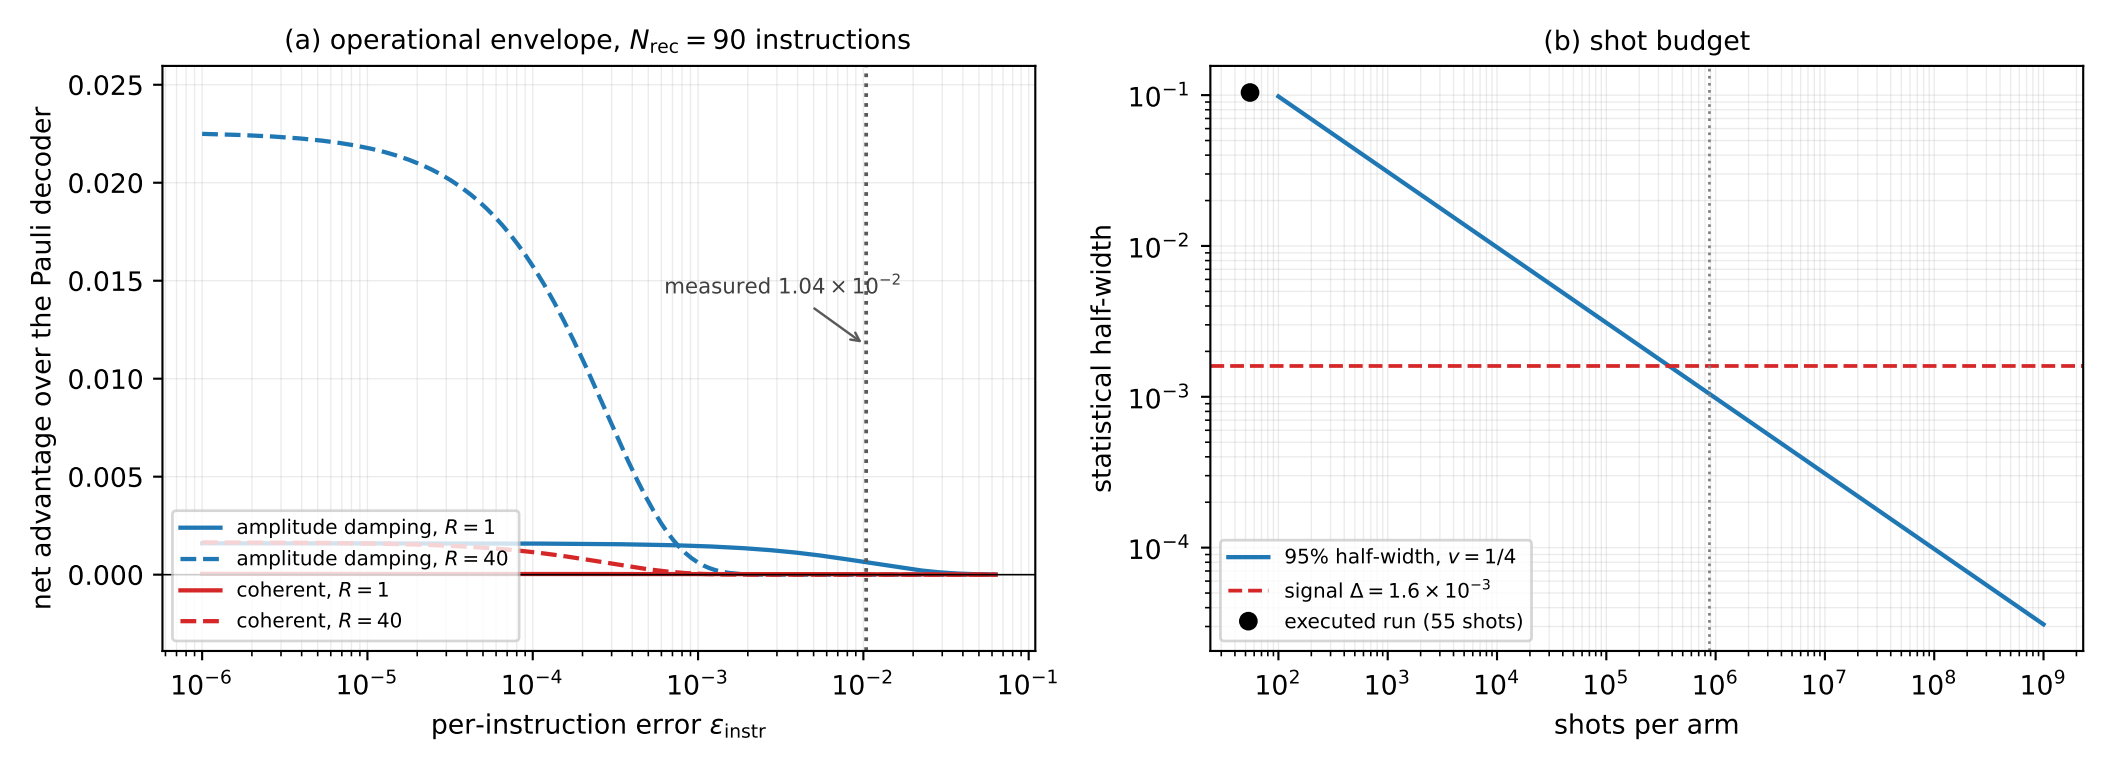
(a) operational envelope, $N_{\mathrm{rec}} = 90$ instructions
net advantage over the Pauli decoder
per-instruction error $\varepsilon_{\mathrm{instr}}$
measured 1.04×10^{-2}
amplitude damping, $R = 1$
amplitude damping, $R = 40$
coherent, $R = 1$
coherent, $R = 40$
(b) shot budget
statistical half-width
shots per arm
95% half-width, $v = 1/4$
signal $\Delta = 1.6 \times 10^{-3}$
executed run (55 shots)