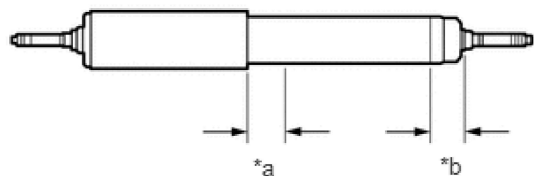


CAUTION / NOTICE / HINT

HINT:

- Use the same procedure for the RH and LH sides.
- The procedure listed below is for the LH side.

PROCEDURE

**1.DISPOSE OF FRONT SHOCK ABSORBER ASSEMBLY LH****48520****a.****P**

*a	50 mm (1.9685 in.)
*b	30 mm (1.1811 in.)

Using a drill, make a hole in the cylinder shown in the illustration to discharge the gas inside.

CAUTION:

Be careful when drilling as shards of metal may fly about. Always use proper safety equipment.

HINT:

The gas is colorless, odorless and non poisonous.