
AXLE AND DIFFERENTIAL REAR DIFFERENTIAL CARRIER OIL SEAL COMPONENTS

ILLUSTRATION

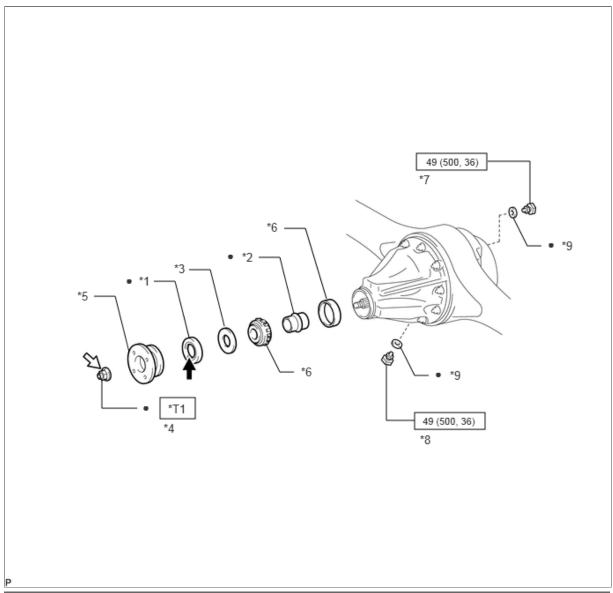

| *1 | REAR DIFFERENTIAL CARRIER OIL SEAL | *2 | REAR DIFFERENTIAL DRIVE PINION BEARING SPACER |
|-----|--|------------|---|
| *3 | REAR DIFFERENTIAL DRIVE PINION OIL SLINGER | *4 | REAR DRIVE PINION COMPANION FLANGE NUT |
| *5 | REAR DRIVE PINION COMPANION FLANGE SUB-ASSEMBLY WITH DUST DEFLECTOR | ı ^h | REAR DRIVE PINION FRONT TAPERED ROLLER BEARING |
| *7 | FILLER PLUG | *8 | DRAIN PLUG |
| *9 | GASKET | - | - |
| | N*m (kgf*cm, ft.*lbf): Specified torque | • | Non-reusable part |
| - | MP grease | \Diamond | Hypoid gear oil LSD |
| *T1 | 441 N*m (4497 kgf*cm, 325 ft.*lbf) or less | - | - |