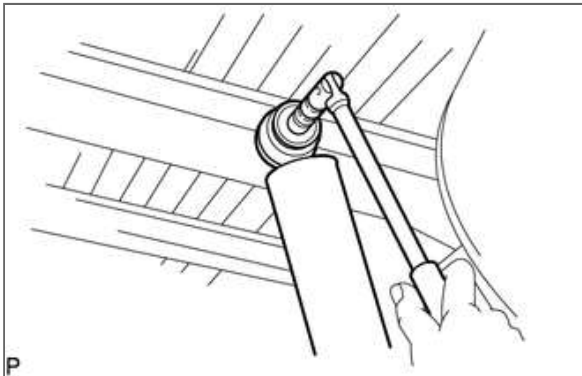


CAUTION / NOTICE / HINT


HINT:

- Use the same procedure for the RH and LH sides.
- The procedure listed below is for the LH side.

PROCEDURE

**1.TEMPORARILY INSTALL REAR SHOCK ABSORBER ASSEMBLY LH****48540****a.**

Temporarily install the upper mounting bolt, rear No. 1 shock absorber cushion washer and 2 bushing and rear shock absorber assembly LH to the frame.

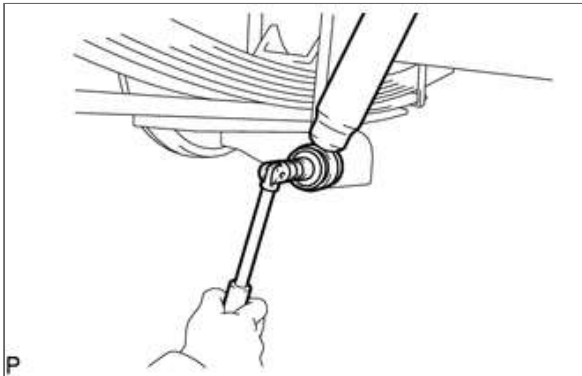b.

Temporarily install the lower mounting bolt, rear No. 1 shock absorber cushion washer and 2 bushing and rear shock absorber assembly LH to the spring U bolt seat sub-assembly LH.

**2.INSTALL REAR WHEEL**

[Click here](#)Suspension>TIRE / WHEEL>TIRE AND WHEEL>INSTALLATION

**3.STABILIZE SUSPENSION**

- Lower the vehicle.
- Bounce the vehicle up and down several times to stabilize the suspension.

**4.TIGHTEN REAR SHOCK ABSORBER ASSEMBLY LH****48540**

- Tighten the 2 bolts.

Torque:
64 N*m (653 kgf*cm, 47 ft.*lbf)