


## 1GR-FE ENGINE CONTROL THROTTLE BODY INSPECTION

## PROCEDURE

## 1.INSPECT THROTTLE BODY WITH MOTOR ASSEMBLY

22030

a.

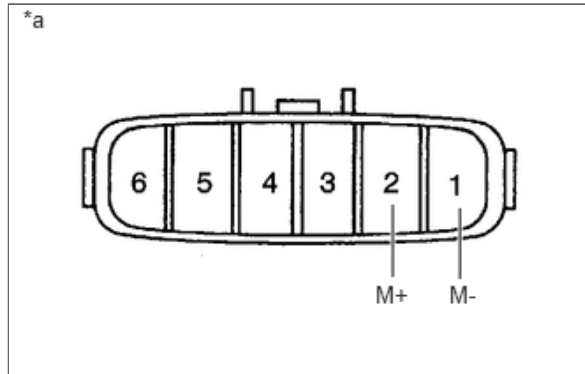

\*a

Component without harness connected  
(Throttle Body with Motor Assembly)

Measure the resistance according to the value(s) in the table below.

**Standard Resistance:**

Tester Connection	Condition	Specified Condition
2 (M+) - 1 (M-)	20°C (68°F)	0.3 to 100 $\Omega$

If the result is not as specified, replace the throttle body with motor assembly.