



JCB 140X LC

Tracked excavator, 4.7 m monoboam, LC undercarriage
Operating weight 14,521 kg on 500 mm shoes (JCB 31728 en-GB 01/25)
Drawn with the 2.5 m dipper; duty is the lower of the 2.5 m and 3.0 m charts
Object handling under LOLER 1998 · ISO 10567 · BS EN 474-5

DETAIL A — HEAD OF SLING 1:10

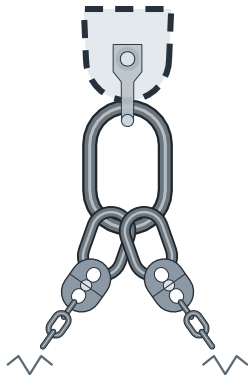

Green Pin G-4163 3.25 t in the hitch eye:
pin Ø19; the eye is indicative
Master link assembly F1314020:
master 140 × 80 inside, bar Ø20
intermediates 70 × 35, bar Ø16
each intermediate carries two legs;
the second is behind, in line
Connecting link 8-8:
bearing to bearing 54, 74 × 53
Chain 8 mm grade 8 (8-8):
pitch 24, width 10.9 inside, 29.6 outside
Thiele The Book 6.0 - size from the tag WLL

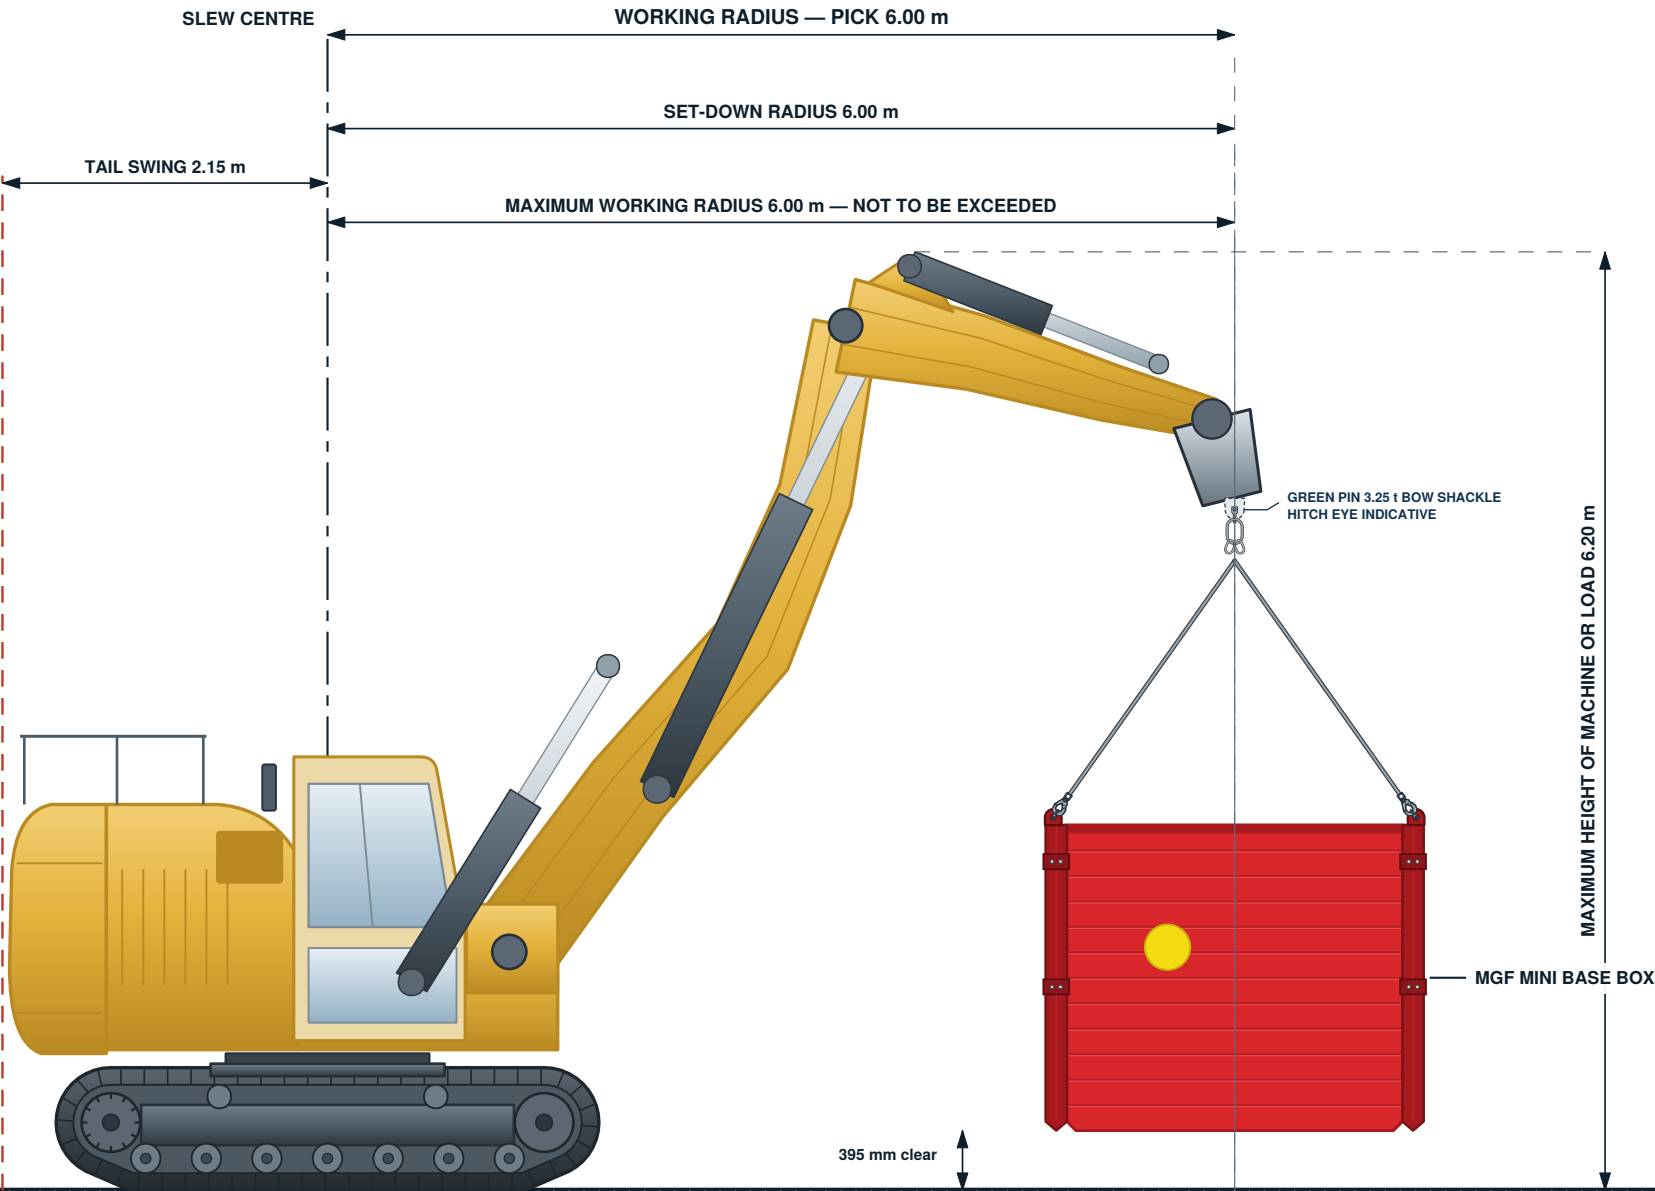

SCALE 1:50 (A3)



Ricky Marsh | CPCS A61 Appointed Person
07803 808093 | ricky@rmtsolutions.co.uk
www.rmtsafetyolutions.com

EXAMPLE ONLY - NOT FOR USE ON SITE

NOTES

1. Do not scale from this drawing — figured dimensions govern.
2. Radii are measured horizontally from the slew centre of the machine.
3. Tracked machine — no outriggers. Ground bearing is a track-pressure check.
4. Heights are derived from the solved working geometry shown.
5. No travelling with a suspended load unless the plan expressly allows it.
6. Read with the lift plan and the companion GA sheet.

LEGEND



- Machine superstructure and boom
- Tracks and undercarriage
- Load / set-down position
- Rigging, shackles and lifting eyes
- Slew centre line
- Existing ground / compacted formation

MACHINE	JCB 140X LC
SERIAL	Anonymised example machine
DUTY	Object handling (LOLER 1998) · ISO 10567 full circle · 2,360 kg at 6.0 m (lower of the 2.5 m and 3.0 m dipper charts)
ATTACHMENT	Rated hitch lifting eye, minimum SWL 3,500 kg (hold H2) · 4-leg grade 8 chain sling 8 mm, WLL 4,250 kg at 0-45°
EXAMPLE	Public website example - no site authorisation Public website example - no site authorisation
DRAWING No.	RMT-WEB-EXCAVATOR-EL-01
SCALE / SIZE	1:50 @ A3
COPY / DATE	Public copy - 6 October 2026
STATUS	Public website example - no site authorisation

SCHEDULE OF LIFTS - PUBLIC EXAMPLE				
Ref	Load	Radius	Total load	Util
1	MGF Mini base box 1,540 kg · gross with hitch allowance and chain	6.00 m	1,885 kg	79.9%
2	MGF Midi base box 1,692 kg (legs 2.5 m)	5.00 m	2,037 kg	75.7%
3	Concrete ring 1,000 kg on ring lifter	6.00 m	1,400 kg	59.3%
4	MGF standard box 1,500 kg ·	5.00 m	1,845 kg	73.2%



EXCLUSION ZONE — 10.00 m RADIUS · RIGID BARRIERS AND WARNING SIGNAGE

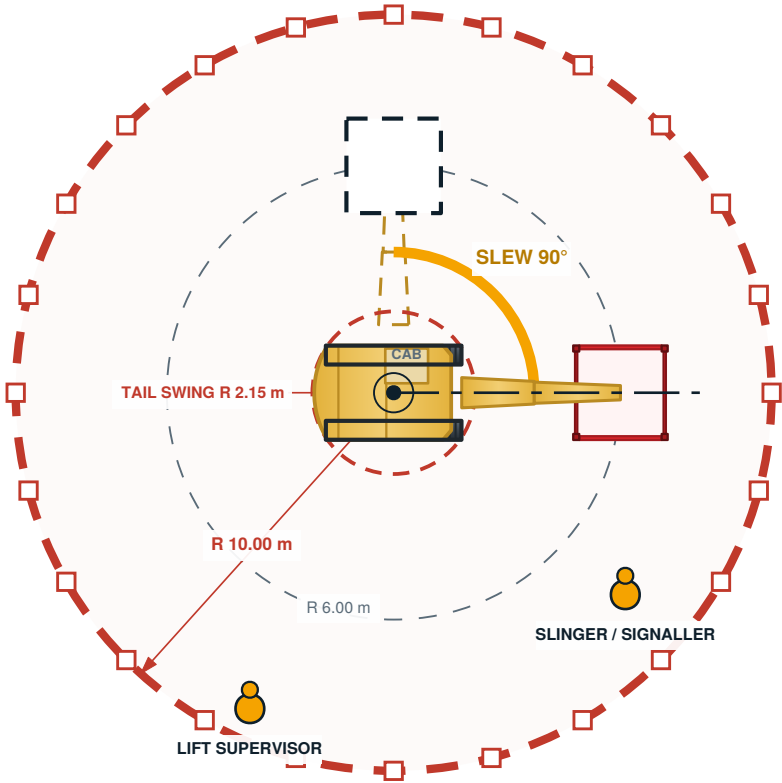

Ricky Marsh | CPCS A61 Appointed Person
07803 808093 | ricky@rmtsolutions.co.uk
www.rmtsafety solutions.com

EXAMPLE ONLY - NOT FOR USE ON SITE

NOTES

1. Do not scale from this drawing — figured dimensions govern.
2. Radii are measured horizontally from the slew centre of the machine.
3. Tracked machine — no outriggers. Ground bearing is a track-pressure check.
4. Exclusion zone 10.00 m (minimum 9.25 m: max radius + half load + 2 m).
5. Vehicle, set-down and personnel positions are indicative, confirmed on the day.
6. Read with the lift plan and the companion GA sheet.
7. Utilisation is checked against a 80% ceiling (project limit).

LEGEND

- Machine superstructure and boom
- Tracks and undercarriage
- Load / set-down position
- Exclusion zone barrier
- Lift reference — see schedule
- Slinger, supervisor, marshal
- Tail swing R 2.15 m

MACHINE	JCB 140X LC
SERIAL	Anonymised example machine
DUTY	Object handling (LOLER 1998) · ISO 10567 full circle · 2,360 kg at 6.0 m (lower of the 2.5 m and 3.0 m dipper charts)
ATTACHMENT	Rated hitch lifting eye, minimum SWL 3,500 kg (hold H2) · 4-leg grade 8 chain sling 8 mm, WLL 4,250 kg at 0-45°
EXAMPLE	Public website example - no site authorisation Public website example - no site authorisation
DRAWING No.	RMT-WEB-EXCAVATOR-PL-01
SCALE / SIZE	1:200 @ A3
COPY / DATE	Public copy - 6 October 2026
STATUS	Public website example - no site authorisation

RIGGING ARRANGEMENT


JCB 140X LC

SCHEDULE OF LIFTING GEAR


4-leg Chain, tag 4.25 t	2.83 t	19.4 kg
Green Pin bow shackle x4	1.5 t	0.9 kg

LOAD	—	1540 kg
RIGGING	—	20 kg
GROSS LOAD	—	1560 kg

Shackle 1.5 t; jaw 19 mm · pin 13 mm · inside 43 mm
Green Pin (Van Beest) Bow Shackle BN G-4163
Sling mass not stated: off the maker's figures
Thiele The Book 6.0, 8 mm grade 8, legs 2.40 m

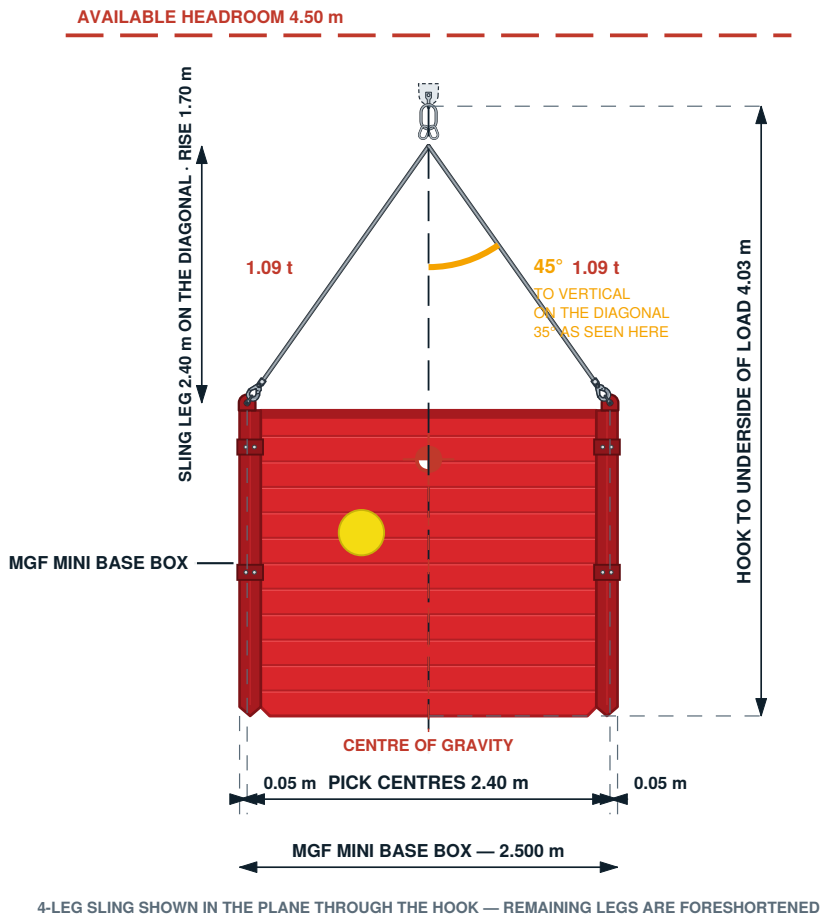


DETAIL A — HEAD OF SLING 1:10

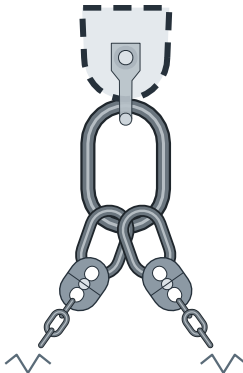

Green Pin G-4163 3.25 t in the hitch eye:
pin Ø19; the eye is indicative
Master link assembly F1314020:
master 140 × 80 inside, bar Ø20
intermediates 70 × 35, bar Ø16
each intermediate carries two legs;
the second is behind, in line
Connecting link 8-8:
bearing to bearing 54, 74 × 53
Chain 8 mm grade 8 (8-8):
pitch 24, width 10.9 inside, 29.6 outside
Thiele The Book 6.0 - size from the tag WLL

DETAIL B — FOOT OF LEG 1:5

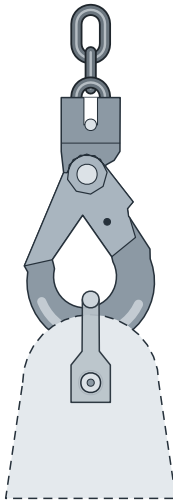

Clevis self-locking hook 8-8:
e 121, overall 164, opening 33
Bow shackle Green Pin G-4163 1.5 t:
bow Ø11, pin Ø13, jaw 19
Lifting lug: the load's own,
drawn indicatively (dashed)
Thiele The Book 6.0 - Green Pin catalogue ch.1



Ricky Marsh | CPCS A61 Appointed Person
07803 808093 | ricky@rmtsolutions.co.uk
www.rmtsafetysolutions.com

EXAMPLE ONLY - NOT FOR USE ON SITE

NOTES

Do not scale from this drawing — figured dimensions govern.
Sling angles are TO THE VERTICAL, as marked on the sling tag (BS EN 818-4 cl.7.3; BS EN 13414-1; BS EN 1492-1).
Mode factor 1.4 (three/four leg on a RIGID load with legs that are not individually adjustable, so worked as a two-leg sling at 0-45 deg (BS EN 13414-2 A.1.5.6)). Leg tension factor $1/\cos \beta = 1.414$.
Sling assembly rated 2.83 t on the 4.25 t 4-leg tag re-rated as a two-leg sling (x 1.4 / 2.1): rigid load, legs not individually adjustable (BS EN 13414-2 A.1.5.6). Utilisation 54.4%.
Gross load 1560 kg = load 1540 kg + rigging 20 kg. The duty chart is read on the GROSS load.
Accessories to be within a current thorough examination (LOLER 1998 reg.9) and checked before use. The AP selects the gear, its attachment and the CoG (BS 7121-1 cl.4.3.2(l)).

LEGEND

- Sling legs and rigging
- Load
- Centre of gravity
- Vertical through the hook

MACHINE	JCB 140X LC
SERIAL	Anonymised example machine
DUTY	Object handling (LOLER 1998) · ISO 10567 full circle · 2,360 kg at 6.0 m (lower of the 2.5 m and 3.0 m dipper charts)
ATTACHMENT	Rated hitch lifting eye, minimum SWL 3,500 kg (hold H2) · 4-leg grade 8 chain sling 8 mm, WLL 4,250 kg at 0-45°
EXAMPLE	Public website example - no site authorisation Public website example - no site authorisation
DRAWING No.	RMT-WEB-EXCAVATOR-RG-01
SCALE / SIZE	1:50 @ A3
COPY / DATE	Public copy - 6 October 2026
STATUS	Public website example - no site authorisation