

The following plots report the Balanced Accuracy (BA) achieved by standard (blue) and adapted (orange) detector on each social media platform: Facebook (FB), Telegram (TL), and Twitter (X). For each platform, gaps (Δ) between standard and adapted detectors are reported for BA, true positive rate (TPR), true negative rate (TNR), and AUC.

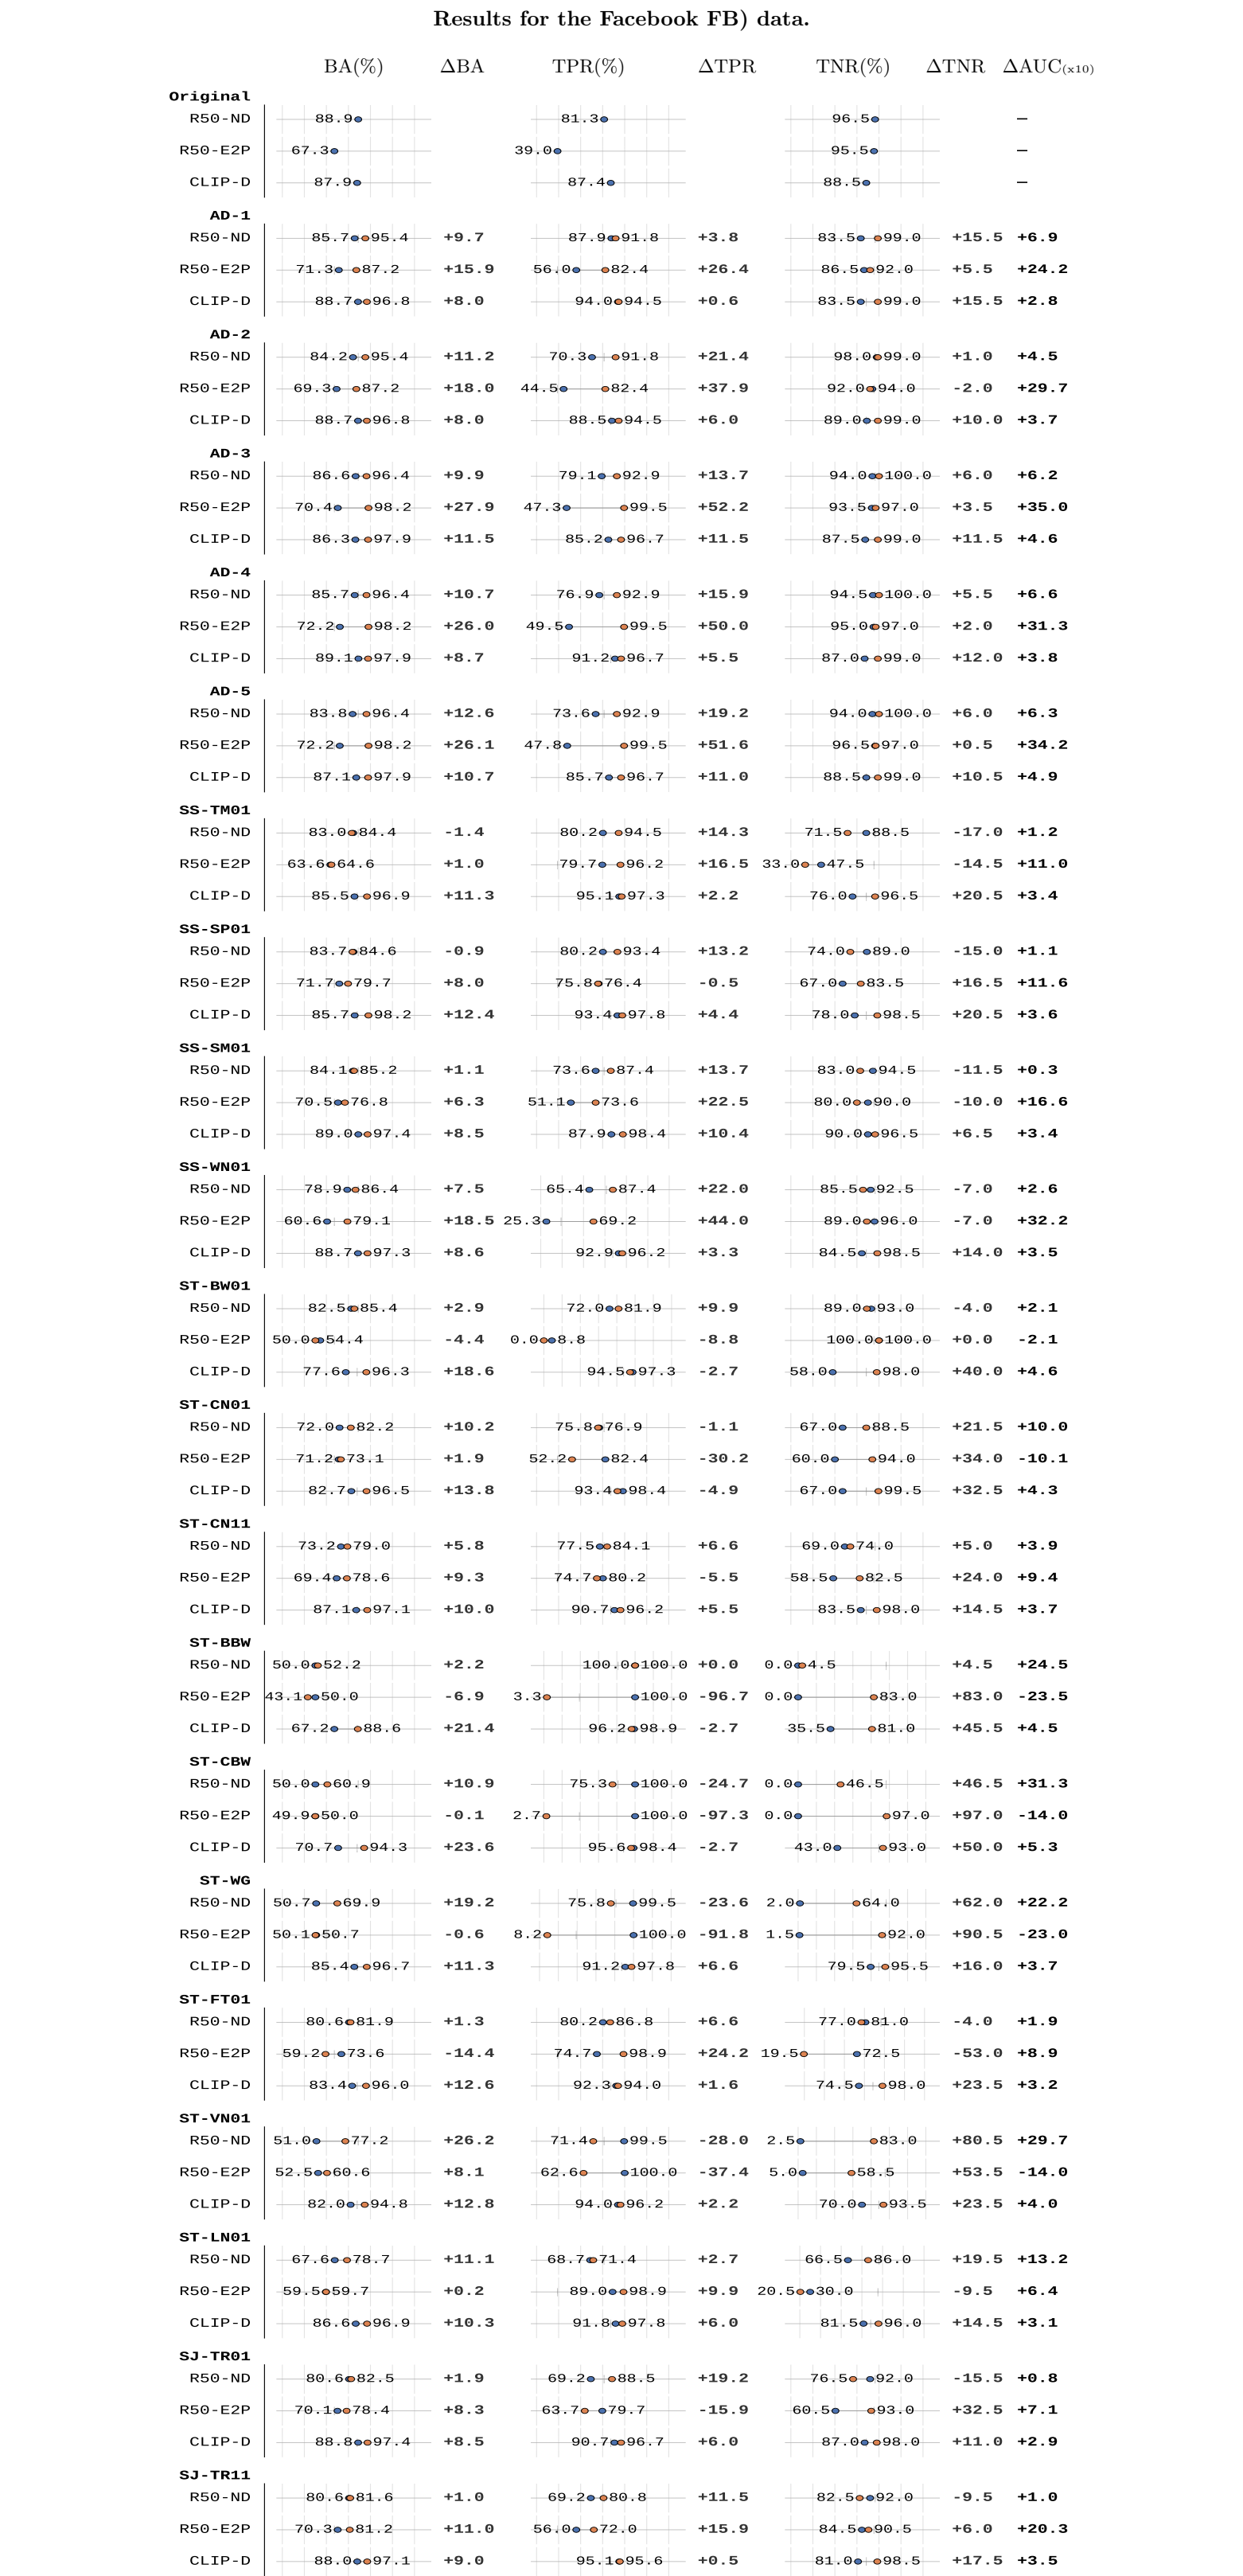


Figure 2: Performance of the standard (blue) and adapted (orange) detectors on the investigated presets for the FB data.

Results for the Telegram (TL) data.

		BA(%)	Δ BA	TPR(%)	Δ TPR	TNR(%)	Δ TNR	Δ AUC _(x10)
Original	R50-ND	85.8		74.1		97.5		—
	R50-E2P	71.2		46.0		96.5		—
	CLIP-D	93.6		89.7		97.5		—
AD-1								
	R50-ND	82.7	+12.7	75.8	+15.9	89.5	+9.5	+6.7
	R50-E2P	75.5	+11.7	61.5	+20.9	89.5	+2.5	+14.4
	CLIP-D	91.5	+5.3	93.4	+1.1	89.5	+9.5	+1.9
AD-2								
	R50-ND	82.3	+13.1	68.1	+23.6	96.5	+2.5	+6.2
	R50-E2P	72.8	+14.4	50.5	+31.9	92.0	-3.0	+15.7
	CLIP-D	93.0	+3.7	89.6	+4.9	96.5	+2.5	+1.5
AD-3								
	R50-ND	80.9	+15.5	70.3	+22.5	91.5	+8.5	+10.1
	R50-E2P	72.5	+25.7	50.5	+48.9	94.5	+2.5	+22.7
	CLIP-D	93.2	+4.6	88.5	+8.2	98.0	+1.0	+2.1
AD-4								
	R50-ND	81.1	+15.3	69.8	+23.1	92.5	+7.5	+10.9
	R50-E2P	71.8	+26.5	50.5	+48.9	93.0	+4.0	+22.8
	CLIP-D	92.8	+5.1	89.0	+7.7	96.5	+2.5	+1.6
AD-5								
	R50-ND	79.6	+16.9	68.1	+24.7	91.0	+9.0	+11.6
	R50-E2P	72.2	+26.0	50.0	+49.5	94.5	+2.5	+21.8
	CLIP-D	93.2	+4.7	87.4	+9.3	99.0	+0.0	+2.1
SS-TM01								
	R50-ND	78.4	+6.4	70.3	+19.2	80.0	-6.5	+5.2
	R50-E2P	63.5	-2.9	76.9	+18.1	56.0	-24.0	+8.2
	CLIP-D	90.8	+6.5	94.5	+1.1	87.0	+12.0	+2.0
SS-SP01								
	R50-ND	79.9	+5.2	70.9	+16.5	83.0	-6.0	+5.4
	R50-E2P	73.9	+2.1	75.8	+8.2	68.0	-4.0	+10.0
	CLIP-D	91.7	+6.2	92.9	+3.8	90.5	+8.5	+2.4
SS-SM01								
	R50-ND	80.0	+4.1	67.0	+18.1	83.0	-10.0	+4.4
	R50-E2P	71.3	+4.9	50.5	+25.3	76.5	-15.5	+7.0
	CLIP-D	93.5	+5.2	89.0	+9.9	98.0	+0.5	+1.6
SS-WN01								
	R50-ND	76.1	+11.7	63.2	+20.3	89.0	+3.0	+10.3
	R50-E2P	62.4	+20.0	31.9	+44.0	89.0	-4.0	+18.7
	CLIP-D	89.8	+8.3	90.1	+6.6	89.5	+10.0	+3.2
ST-BW01								
	R50-ND	76.2	+5.5	64.8	+17.0	81.5	-6.0	+4.5
	R50-E2P	52.8	-3.0	6.0	-6.6	99.0	+0.5	+11.3
	CLIP-D	75.1	+21.2	94.5	-1.1	54.5	+43.5	+4.8
ST-CN01								
	R50-ND	73.1	+6.9	69.2	+2.7	77.0	+11.0	+7.8
	R50-E2P	68.7	+9.1	66.5	-20.3	50.5	+38.5	+12.0
	CLIP-D	81.1	+15.7	96.2	-1.1	65.0	+32.5	+4.2
ST-CN11								
	R50-ND	70.4	+8.3	69.2	+7.7	71.5	+9.0	+7.0
	R50-E2P	69.5	+4.6	78.6	+2.2	60.5	+7.0	+12.6
	CLIP-D	89.4	+6.6	91.2	+3.3	87.5	+10.0	+3.0
ST-BBW								
	R50-ND	50.0	+1.2	98.9	-1.1	0.0	+3.5	+5.8
	R50-E2P	50.0	+6.6	13.7	-86.3	0.0	+99.5	+9.6
	CLIP-D	70.2	+19.4	96.2	-3.3	41.0	+42.0	+4.4
ST-CBW								
	R50-ND	50.0	+9.5	66.5	-33.5	0.0	+52.5	+9.5
	R50-E2P	50.0	+3.8	7.7	-92.3	0.0	+100.0	+12.1
	CLIP-D	72.7	+21.1	95.1	-2.7	47.5	+45.0	+5.6
ST-WG								
	R50-ND	50.5	+17.7	76.4	-23.1	1.5	+58.5	+4.9
	R50-E2P	50.5	+12.3	29.7	-70.3	1.0	+96.0	-2.7
	CLIP-D	86.1	+8.8	90.7	+6.0	81.5	+11.5	+3.5
ST-FT01								
	R50-ND	76.6	+4.5	69.8	+12.1	80.5	-3.0	+5.5
	R50-E2P	55.7	-18.4	69.8	+29.1	12.5	-66.0	-4.8
	CLIP-D	86.5	+10.3	93.4	+0.5	79.5	+20.0	+2.5
ST-VN01								
	R50-ND	50.0	+21.4	70.3	-29.1	0.5	+72.5	+8.4
	R50-E2P	52.0	+15.5	76.9	-22.5	4.5	+58.0	+5.8
	CLIP-D	82.8	+10.6	94.5	+1.6	71.0	+19.5	+3.7
ST-LN01								
	R50-ND	63.9	+14.0	70.3	+4.9	57.5	+23.0	+14.4
	R50-E2P	58.5	-0.1	91.2	+8.8	17.0	-9.0	+7.0
	CLIP-D	90.6	+5.7	91.8	+4.9	89.5	+6.5	+2.0
SJ-TR01								
	R50-ND	77.6	+4.6	64.3	+19.8	80.5	-10.5	+4.2
	R50-E2P	71.4	+6.9	67.0	-8.8	67.0	+22.5	+13.9
	CLIP-D	89.2	+7.3	88.5	+7.1	90.0	+7.5	+2.7
SJ-TR11								
	R50-ND	76.7	+3.7	65.9	+9.3	85.5	-2.0	+6.2
	R50-E2P	73.4	+9.8	63.7	+11.5	83.0	+8.0	+12.5
	CLIP-D	88.2	+8.6	92.9	+2.7	83.5	+14.5	+2.7

Figure 3: Performance of the standard (blue) and adapted (orange) detectors on the investigated presets for the TL data.

Results for the Twitter(X) data.

		BA(%)	Δ BA	TPR(%)	Δ TPR	TNR(%)	Δ TNR	Δ AUC _(x10)
Original	R50-ND	90.4		81.9		99.0		—
	R50-E2P	79.3		61.5		97.0		—
	CLIP-D	93.8		90.7		97.0		—
AD-1								
	R50-ND	89.995.4	+5.5	85.791.8	+6.0	94.099.0	+5.0	+3.5
	R50-E2P	79.287.2	+8.0	71.482.4	+11.0	87.092.0	+5.0	+11.6
	CLIP-D	92.096.8	+4.7	94.594.5	+0.0	89.599.0	+9.5	+2.1
AD-2								
	R50-ND	88.395.4	+7.1	78.691.8	+13.2	98.099.0	+1.0	+2.4
	R50-E2P	79.987.2	+7.3	64.382.4	+18.1	92.095.5	-3.5	+11.9
	CLIP-D	93.196.8	+3.6	91.294.5	+3.3	95.099.0	+4.0	+1.6
AD-3								
	R50-ND	89.496.4	+7.0	80.892.9	+12.1	98.0100.0	+2.0	+3.7
	R50-E2P	79.898.2	+18.4	63.299.5	+36.3	96.597.0	+0.5	+20.6
	CLIP-D	93.097.9	+4.8	89.096.7	+7.7	97.099.0	+2.0	+1.8
AD-4								
	R50-ND	89.496.4	+7.0	80.892.9	+12.1	98.0100.0	+2.0	+4.2
	R50-E2P	80.798.2	+17.6	64.899.5	+34.6	96.597.0	+0.5	+19.0
	CLIP-D	92.897.9	+5.0	90.796.7	+6.0	95.099.0	+4.0	+1.7
AD-5								
	R50-ND	88.696.4	+7.9	79.192.9	+13.7	98.0100.0	+2.0	+4.1
	R50-E2P	77.798.2	+20.6	59.399.5	+40.1	96.097.0	+1.0	+20.7
	CLIP-D	92.497.9	+5.4	87.496.7	+9.3	97.599.0	+1.5	+2.2
SS-TM01								
	R50-ND	89.590.4	+0.9	83.591.8	+8.2	89.095.5	-6.5	+2.1
	R50-E2P	65.174.1	+9.0	80.280.8	-0.5	49.568.0	+18.5	+11.6
	CLIP-D	89.497.1	+7.6	92.995.6	+2.7	86.098.5	+12.5	+2.6
SS-SP01								
	R50-ND	88.691.1	+2.4	80.890.1	+9.3	92.096.5	-4.5	+1.6
	R50-E2P	76.982.8	+5.8	78.081.9	-3.8	72.087.5	+15.5	+9.6
	CLIP-D	88.997.6	+8.7	91.295.6	+4.4	86.599.5	+13.0	+2.9
SS-SM01								
	R50-ND	88.089.5	+1.5	78.689.0	+10.4	90.097.5	-7.5	+1.2
	R50-E2P	78.882.0	+3.2	63.278.6	+15.4	85.594.5	-9.0	+10.7
	CLIP-D	92.098.4	+6.4	87.997.8	+9.9	96.099.0	+3.0	+2.2
SS-WN01								
	R50-ND	85.692.8	+7.2	74.790.1	+15.4	95.596.5	-1.0	+3.5
	R50-E2P	67.983.1	+15.2	42.380.8	+38.5	85.593.5	-8.0	+24.8
	CLIP-D	88.797.8	+9.1	88.596.2	+7.7	89.099.5	+10.5	+3.2
ST-BW01								
	R50-ND	86.489.7	+3.3	75.887.9	+12.1	91.597.0	-5.5	+1.5
	R50-E2P	62.464.5	+2.1	25.345.1	+19.8	84.099.5	-15.5	+3.7
	CLIP-D	74.696.0	+21.4	93.496.7	-3.3	52.598.5	+46.0	+4.8
ST-CN01								
	R50-ND	81.189.5	+8.4	74.282.4	+8.2	88.096.5	+8.5	+6.1
	R50-E2P	67.180.3	+13.2	73.190.7	-17.6	43.587.5	+44.0	+8.1
	CLIP-D	82.697.6	+15.0	96.797.3	+0.5	68.598.0	+29.5	+3.8
ST-CN11								
	R50-ND	79.985.4	+5.5	74.785.7	+11.0	85.085.0	+0.0	+4.1
	R50-E2P	69.978.6	+8.7	80.286.3	-6.0	53.577.0	+23.5	+10.7
	CLIP-D	88.396.8	+8.4	90.795.1	+4.4	86.098.5	+12.5	+2.9
ST-BBW								
	R50-ND	50.055.8	+5.8	89.0100.0	-11.0	0.022.5	+22.5	+22.8
	R50-E2P	40.050.0	-10.0	73.1100.0	-26.9	0.07.0	+7.0	-16.0
	CLIP-D	72.794.1	+21.4	96.299.5	-3.3	46.092.0	+46.0	+3.5
ST-CBW								
	R50-ND	50.064.0	+14.0	60.4100.0	-39.6	0.067.5	+67.5	+23.2
	R50-E2P	50.062.4	+12.4	46.7100.0	-53.3	0.078.0	+78.0	+4.1
	CLIP-D	77.995.3	+17.4	94.597.8	-3.3	58.096.0	+38.0	+4.2
ST-WG								
	R50-ND	52.077.0	+25.0	71.499.5	-28.0	4.582.5	+78.0	+16.7
	R50-E2P	50.259.5	+9.3	72.5100.0	-27.5	0.546.5	+46.0	-9.1
	CLIP-D	89.996.6	+6.7	91.897.3	+5.5	88.096.0	+8.0	+2.7
ST-FT01								
	R50-ND	85.589.8	+4.2	78.689.0	+10.4	90.592.5	-2.0	+3.0
	R50-E2P	75.677.5	+1.9	79.784.1	+4.4	71.071.5	-0.5	+6.1
	CLIP-D	87.397.0	+9.7	94.595.1	-0.5	79.599.5	+20.0	+2.3
ST-VN01								
	R50-ND	51.278.6	+27.4	68.799.5	-30.8	3.088.5	+85.5	+21.0
	R50-E2P	52.054.7	+2.7	82.499.5	-17.0	4.527.0	+22.5	-7.8
	CLIP-D	85.896.1	+10.3	94.596.7	+2.2	77.095.5	+18.5	+3.1
ST-LN01								
	R50-ND	70.280.6	+10.5	70.375.3	+4.9	70.086.0	+16.0	+12.6
	R50-E2P	58.777.6	+18.9	91.292.9	-1.6	24.564.0	+39.5	+6.4
	CLIP-D	91.297.4	+6.1	93.496.7	+3.3	89.098.0	+9.0	+1.9
SJ-TR01								
	R50-ND	86.789.1	+2.4	75.890.7	+14.8	87.597.5	-10.0	+1.0
	R50-E2P	73.880.6	+6.8	74.285.2	-11.0	62.587.0	+24.5	+8.9
	CLIP-D	90.696.8	+6.1	91.294.5	+3.3	90.099.0	+9.0	+2.7
SJ-TR11								
	R50-ND	85.188.4	+3.3	73.686.8	+13.2	90.096.5	-6.5	+2.0
	R50-E2P	76.583.4	+6.9	71.485.7	+14.3	81.081.5	-0.5	+10.7
	CLIP-D	89.997.0	+7.1	91.894.5	+2.7	88.099.5	+11.5	+3.1

Figure 4: Performance of the standard (blue) and adapted (orange) detectors on the investigated presets for the X data.