

The following plots report the differential performance between the adapted (orange) and standard (blue) detectors for each social platform (FB, TL, X) in terms of balanced accuracy (BA); gaps (Δ) are reported for BA, true negative rate (TNR), true positive rate (TPR), and AUC.

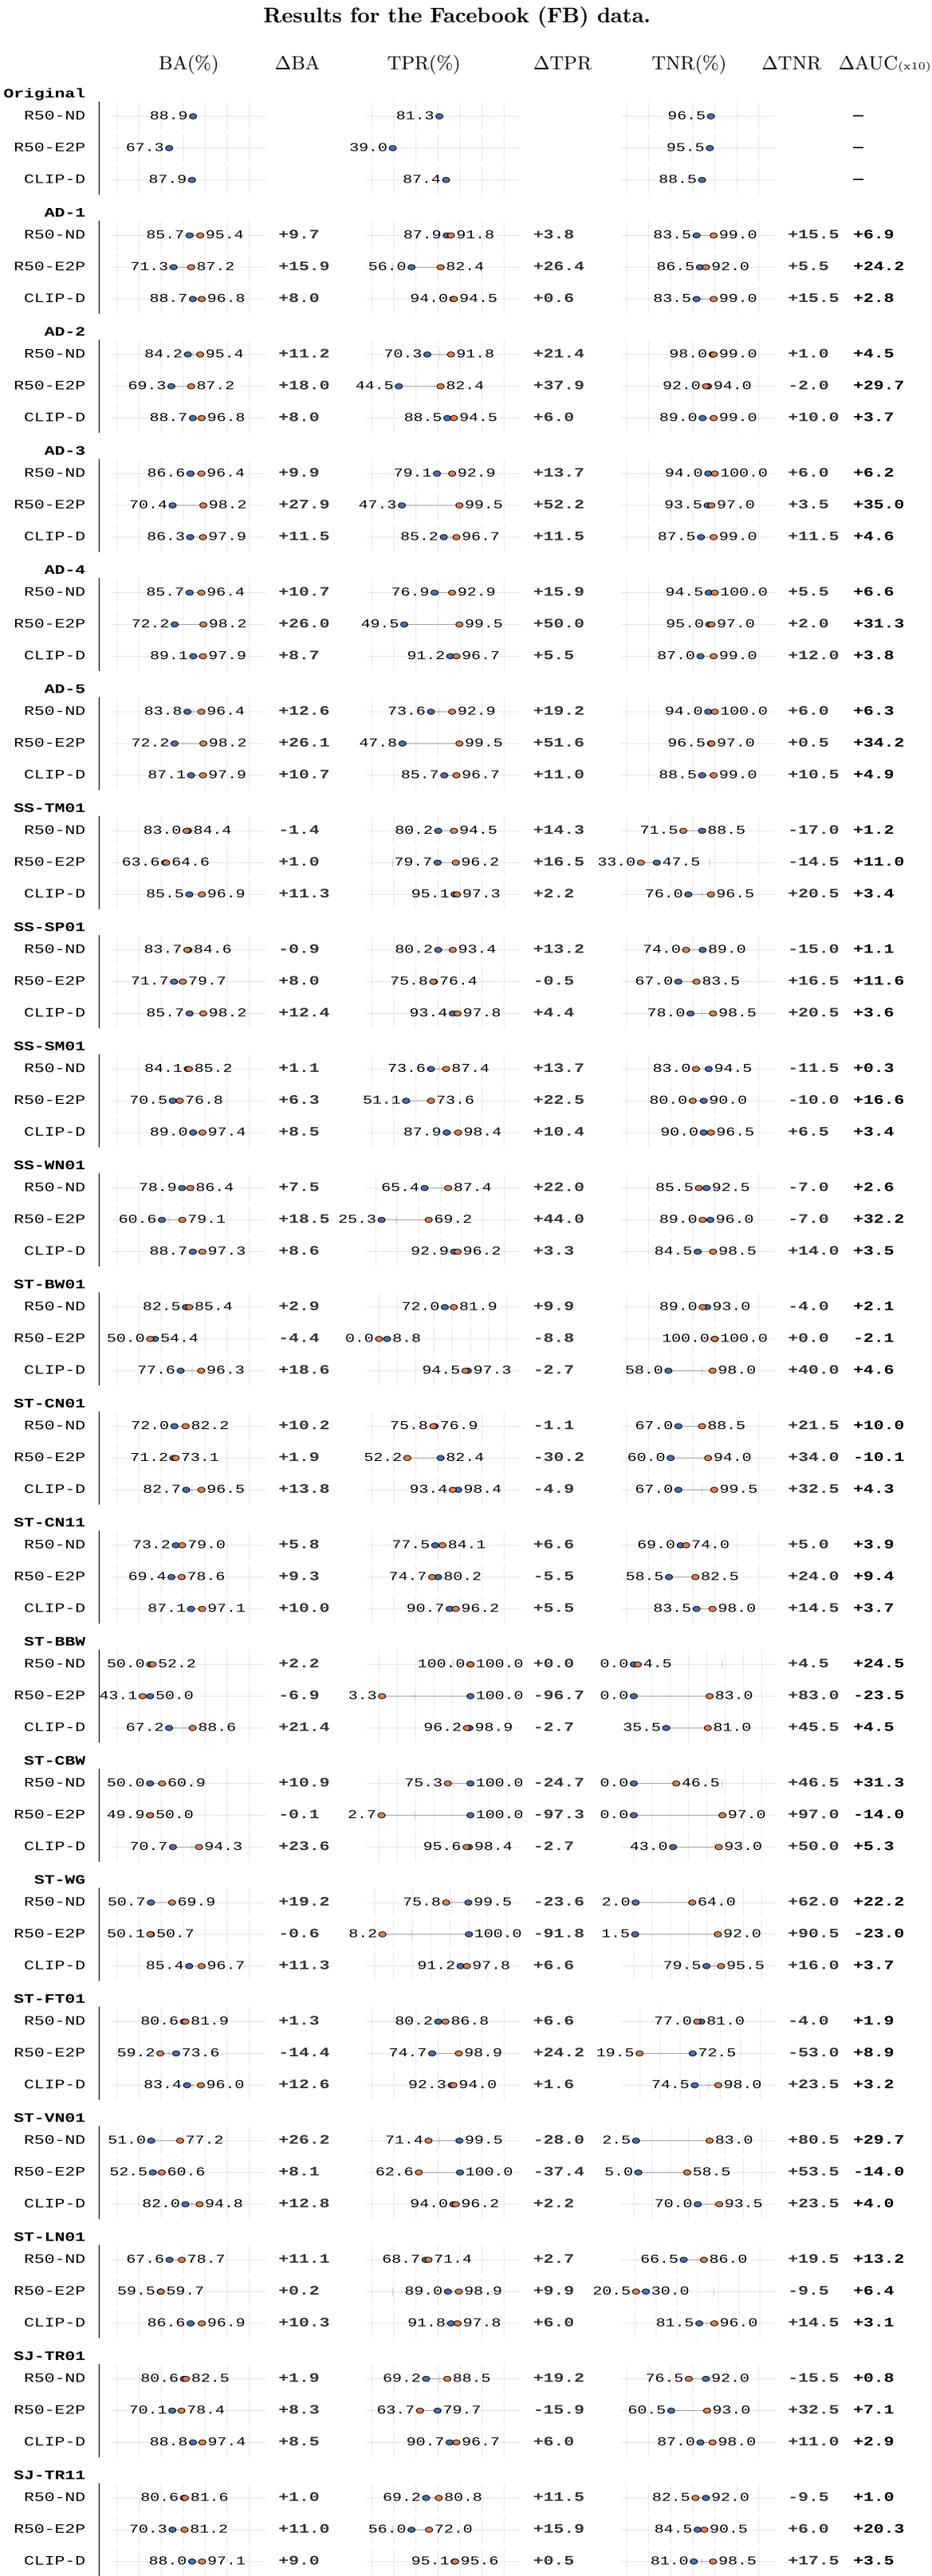


Figure 2: Performance of the standard (blue) and adapted (orange) detectors on the investigated presets for the FB data.

Results for the Telegram (TL) data.

	BA(%)	Δ BA	TPR(%)	Δ TPR	TNR(%)	Δ TNR	Δ AUC _(x10)
Original							
R50-ND	85.8		74.1		97.5		—
R50-E2P	71.2		46.0		96.5		—
CLIP-D	93.6		89.7		97.5		—
AD-1							
R50-ND	82.795.4	+12.7	75.891.8	+15.9	89.599.0	+9.5	+6.7
R50-E2P	75.587.2	+11.7	61.582.4	+20.9	89.592.0	+2.5	+14.4
CLIP-D	91.596.8	+5.3	93.494.5	+1.1	89.599.0	+9.5	+1.9
AD-2							
R50-ND	82.395.4	+13.1	68.191.8	+23.6	96.599.0	+2.5	+6.2
R50-E2P	72.887.2	+14.4	50.582.4	+31.9	92.095.0	-3.0	+15.7
CLIP-D	93.096.8	+3.7	89.694.5	+4.9	96.599.0	+2.5	+1.5
AD-3							
R50-ND	80.996.4	+15.5	70.392.9	+22.5	91.5100.0	+8.5	+10.1
R50-E2P	72.598.2	+25.7	50.599.5	+48.9	94.597.0	+2.5	+22.7
CLIP-D	93.297.9	+4.6	88.596.7	+8.2	98.099.0	+1.0	+2.1
AD-4							
R50-ND	81.196.4	+15.3	69.892.9	+23.1	92.5100.0	+7.5	+10.9
R50-E2P	71.898.2	+26.5	50.599.5	+48.9	93.097.0	+4.0	+22.8
CLIP-D	92.897.9	+5.1	89.096.7	+7.7	96.599.0	+2.5	+1.6
AD-5							
R50-ND	79.696.4	+16.9	68.192.9	+24.7	91.0100.0	+9.0	+11.6
R50-E2P	72.298.2	+26.0	50.099.5	+49.5	94.597.0	+2.5	+21.8
CLIP-D	93.297.9	+4.7	87.496.7	+9.3	99.099.0	+0.0	+2.1
SS-TM01							
R50-ND	78.484.8	+6.4	70.389.6	+19.2	80.086.5	-6.5	+5.2
R50-E2P	63.566.5	-2.9	76.995.1	+18.1	32.056.0	-24.0	+8.2
CLIP-D	90.897.3	+6.5	94.595.6	+1.1	87.099.0	+12.0	+2.0
SS-SP01							
R50-ND	79.985.2	+5.2	70.987.4	+16.5	83.089.0	-6.0	+5.4
R50-E2P	73.976.0	+2.1	75.884.1	+8.2	68.072.0	-4.0	+10.0
CLIP-D	91.797.9	+6.2	92.996.7	+3.8	90.599.0	+8.5	+2.4
SS-SM01							
R50-ND	80.084.1	+4.1	67.085.2	+18.1	83.093.0	-10.0	+4.4
R50-E2P	71.376.2	+4.9	50.575.8	+25.3	76.592.0	-15.5	+7.0
CLIP-D	93.598.7	+5.2	89.098.9	+9.9	98.098.5	+0.5	+1.6
SS-WN01							
R50-ND	76.187.8	+11.7	63.283.5	+20.3	89.092.0	+3.0	+10.3
R50-E2P	62.482.4	+20.0	31.975.8	+44.0	89.093.0	-4.0	+18.7
CLIP-D	89.898.1	+8.3	90.196.7	+6.6	89.599.5	+10.0	+3.2
ST-BW01							
R50-ND	76.281.7	+5.5	64.881.9	+17.0	81.587.5	-6.0	+4.5
R50-E2P	52.855.8	-3.0	6.012.6	-6.6	99.099.5	+0.5	+11.3
CLIP-D	75.196.3	+21.2	94.595.6	-1.1	54.598.0	+43.5	+4.8
ST-CN01							
R50-ND	73.180.0	+6.9	69.272.0	+2.7	77.088.0	+11.0	+7.8
R50-E2P	68.777.7	+9.1	66.586.8	-20.3	50.589.0	+38.5	+12.0
CLIP-D	81.196.8	+15.7	96.297.3	-1.1	65.097.5	+32.5	+4.2
ST-CN11							
R50-ND	70.478.7	+8.3	69.276.9	+7.7	71.580.5	+9.0	+7.0
R50-E2P	69.574.1	+4.6	78.680.8	+2.2	60.567.5	+7.0	+12.6
CLIP-D	89.496.0	+6.6	91.294.5	+3.3	87.597.5	+10.0	+3.0
ST-BBW							
R50-ND	50.051.2	+1.2	98.9100.0	-1.1	0.03.5	+3.5	+5.8
R50-E2P	50.056.6	+6.6	13.7100.0	-86.3	0.099.5	+99.5	+9.6
CLIP-D	70.289.6	+19.4	96.299.5	-3.3	41.083.0	+42.0	+4.4
ST-CBW							
R50-ND	50.059.5	+9.5	66.5100.0	-33.5	0.052.5	+52.5	+9.5
R50-E2P	50.053.8	+3.8	7.7100.0	-92.3	0.0100.0	+100.0	+12.1
CLIP-D	72.793.8	+21.1	95.197.8	-2.7	47.592.5	+45.0	+5.6
ST-WG							
R50-ND	50.568.2	+17.7	76.499.5	-23.1	1.560.0	+58.5	+4.9
R50-E2P	50.562.8	+12.3	29.7100.0	-70.3	1.096.0	+95.0	-2.7
CLIP-D	86.194.9	+8.8	90.796.7	+6.0	81.593.0	+11.5	+3.5
ST-FT01							
R50-ND	76.681.2	+4.5	69.881.9	+12.1	80.583.5	-3.0	+5.5
R50-E2P	55.774.1	-18.4	69.898.9	+29.1	12.578.5	-66.0	-4.8
CLIP-D	86.596.7	+10.3	93.494.0	+0.5	79.599.5	+20.0	+2.5
ST-VN01							
R50-ND	50.071.4	+21.4	70.399.5	-29.1	0.572.5	+72.0	+8.4
R50-E2P	52.067.5	+15.5	76.999.5	-22.5	4.558.0	+53.5	+5.8
CLIP-D	82.893.3	+10.6	94.596.2	+1.6	71.090.5	+19.5	+3.7
ST-LN01							
R50-ND	63.977.9	+14.0	70.375.3	+4.9	57.580.5	+23.0	+14.4
R50-E2P	58.558.6	-0.1	91.2100.0	+8.8	17.026.0	-9.0	+7.0
CLIP-D	90.696.4	+5.7	91.896.7	+4.9	89.596.0	+6.5	+2.0
SJ-TR01							
R50-ND	77.682.3	+4.6	64.384.1	+19.8	80.591.0	-10.5	+4.2
R50-E2P	71.478.3	+6.9	67.075.8	-8.8	67.089.5	+22.5	+13.9
CLIP-D	89.296.6	+7.3	88.595.6	+7.1	90.097.5	+7.5	+2.7
SJ-TR11							
R50-ND	76.780.4	+3.7	65.975.3	+9.3	85.587.5	-2.0	+6.2
R50-E2P	73.483.1	+9.8	63.775.3	+11.5	83.091.0	+8.0	+12.5
CLIP-D	88.296.8	+8.6	92.995.6	+2.7	83.598.0	+14.5	+2.7

Figure 3: Performance of the standard (blue) and adapted (orange) detectors on the investigated presets for the TL data.

Results for the Twitter(X) data.

	BA(%)	ΔBA	TPR(%)	ΔTPR	TNR(%)	ΔTNR	ΔAUC _(x10)
Original							
R50-ND	90.4		81.9		99.0		—
R50-E2P	79.3		61.5		97.0		—
CLIP-D	93.8		90.7		97.0		—
AD-1							
R50-ND	89.995.4	+5.5	85.791.8	+6.0	94.099.0	+5.0	+3.5
R50-E2P	79.287.2	+8.0	71.482.4	+11.0	87.092.0	+5.0	+11.6
CLIP-D	92.096.8	+4.7	94.594.5	+0.0	89.599.0	+9.5	+2.1
AD-2							
R50-ND	88.395.4	+7.1	78.691.8	+13.2	98.099.0	+1.0	+2.4
R50-E2P	79.987.2	+7.3	64.382.4	+18.1	92.095.5	-3.5	+11.9
CLIP-D	93.196.8	+3.6	91.294.5	+3.3	95.099.0	+4.0	+1.6
AD-3							
R50-ND	89.496.4	+7.0	80.892.9	+12.1	98.0100.0	+2.0	+3.7
R50-E2P	79.898.2	+18.4	63.299.5	+36.3	96.597.0	+0.5	+20.6
CLIP-D	93.097.9	+4.8	89.096.7	+7.7	97.099.0	+2.0	+1.8
AD-4							
R50-ND	89.496.4	+7.0	80.892.9	+12.1	98.0100.0	+2.0	+4.2
R50-E2P	80.798.2	+17.6	64.899.5	+34.6	96.597.0	+0.5	+19.0
CLIP-D	92.897.9	+5.0	90.796.7	+6.0	95.099.0	+4.0	+1.7
AD-5							
R50-ND	88.696.4	+7.9	79.192.9	+13.7	98.0100.0	+2.0	+4.1
R50-E2P	77.798.2	+20.6	59.399.5	+40.1	96.097.0	+1.0	+20.7
CLIP-D	92.497.9	+5.4	87.496.7	+9.3	97.599.0	+1.5	+2.2
SS-TM01							
R50-ND	89.590.4	+0.9	83.591.8	+8.2	89.095.5	-6.5	+2.1
R50-E2P	65.174.1	+9.0	80.280.8	-0.5	49.568.0	+18.5	+11.6
CLIP-D	89.497.1	+7.6	92.995.6	+2.7	86.098.5	+12.5	+2.6
SS-SP01							
R50-ND	88.691.1	+2.4	80.890.1	+9.3	92.096.5	-4.5	+1.6
R50-E2P	76.982.8	+5.8	78.081.9	-3.8	72.087.5	+15.5	+9.6
CLIP-D	88.997.6	+8.7	91.295.6	+4.4	86.599.5	+13.0	+2.9
SS-SM01							
R50-ND	88.089.5	+1.5	78.689.0	+10.4	90.097.5	-7.5	+1.2
R50-E2P	78.882.0	+3.2	63.278.6	+15.4	85.594.5	-9.0	+10.7
CLIP-D	92.098.4	+6.4	87.997.8	+9.9	96.099.0	+3.0	+2.2
SS-WN01							
R50-ND	85.692.8	+7.2	74.790.1	+15.4	95.596.5	-1.0	+3.5
R50-E2P	67.983.1	+15.2	42.380.8	+38.5	85.593.5	-8.0	+24.8
CLIP-D	88.797.8	+9.1	88.596.2	+7.7	89.099.5	+10.5	+3.2
ST-BW01							
R50-ND	86.489.7	+3.3	75.887.9	+12.1	91.597.0	-5.5	+1.5
R50-E2P	62.464.5	+2.1	25.345.1	+19.8	84.099.5	-15.5	+3.7
CLIP-D	74.696.0	+21.4	93.496.7	-3.3	52.598.5	+46.0	+4.8
ST-CN01							
R50-ND	81.189.5	+8.4	74.282.4	+8.2	88.096.5	+8.5	+6.1
R50-E2P	67.180.3	+13.2	73.190.7	-17.6	43.587.5	+44.0	+8.1
CLIP-D	82.697.6	+15.0	96.797.3	+0.5	68.598.0	+29.5	+3.8
ST-CN11							
R50-ND	79.985.4	+5.5	74.785.7	+11.0	85.085.0	+0.0	+4.1
R50-E2P	69.978.6	+8.7	80.286.3	-6.0	53.577.0	+23.5	+10.7
CLIP-D	88.396.8	+8.4	90.795.1	+4.4	86.098.5	+12.5	+2.9
ST-BBW							
R50-ND	50.055.8	+5.8	89.0100.0	-11.0	0.022.5	+22.5	+22.8
R50-E2P	40.050.0	-10.0	73.1100.0	-26.9	0.07.0	+7.0	-16.0
CLIP-D	72.794.1	+21.4	96.299.5	-3.3	46.092.0	+46.0	+3.5
ST-CBW							
R50-ND	50.064.0	+14.0	60.4100.0	-39.6	0.067.5	+67.5	+23.2
R50-E2P	50.062.4	+12.4	46.7100.0	-53.3	0.078.0	+78.0	+4.1
CLIP-D	77.995.3	+17.4	94.597.8	-3.3	58.096.0	+38.0	+4.2
ST-WG							
R50-ND	52.077.0	+25.0	71.499.5	-28.0	4.582.5	+78.0	+16.7
R50-E2P	50.259.5	+9.3	72.5100.0	-27.5	0.546.5	+46.0	-9.1
CLIP-D	89.996.6	+6.7	91.897.3	+5.5	88.096.0	+8.0	+2.7
ST-FT01							
R50-ND	85.589.8	+4.2	78.689.0	+10.4	90.592.5	-2.0	+3.0
R50-E2P	75.677.5	+1.9	79.784.1	+4.4	71.071.5	-0.5	+6.1
CLIP-D	87.397.0	+9.7	94.595.1	-0.5	79.599.5	+20.0	+2.3
ST-VN01							
R50-ND	51.278.6	+27.4	68.799.5	-30.8	3.088.5	+85.5	+21.0
R50-E2P	52.054.7	+2.7	82.499.5	-17.0	4.527.0	+22.5	-7.8
CLIP-D	85.896.1	+10.3	94.596.7	+2.2	77.095.5	+18.5	+3.1
ST-LN01							
R50-ND	70.280.6	+10.5	70.375.3	+4.9	70.086.0	+16.0	+12.6
R50-E2P	58.777.6	+18.9	91.292.9	-1.6	24.564.0	+39.5	+6.4
CLIP-D	91.297.4	+6.1	93.496.7	+3.3	89.098.0	+9.0	+1.9
SJ-TR01							
R50-ND	86.789.1	+2.4	75.890.7	+14.8	87.597.5	-10.0	+1.0
R50-E2P	73.880.6	+6.8	74.285.2	-11.0	62.587.0	+24.5	+8.9
CLIP-D	90.696.8	+6.1	91.294.5	+3.3	90.099.0	+9.0	+2.7
SJ-TR11							
R50-ND	85.188.4	+3.3	73.686.8	+13.2	90.096.5	-6.5	+2.0
R50-E2P	76.583.4	+6.9	71.485.7	+14.3	81.081.5	-0.5	+10.7
CLIP-D	89.997.0	+7.1	91.894.5	+2.7	88.099.5	+11.5	+3.1