

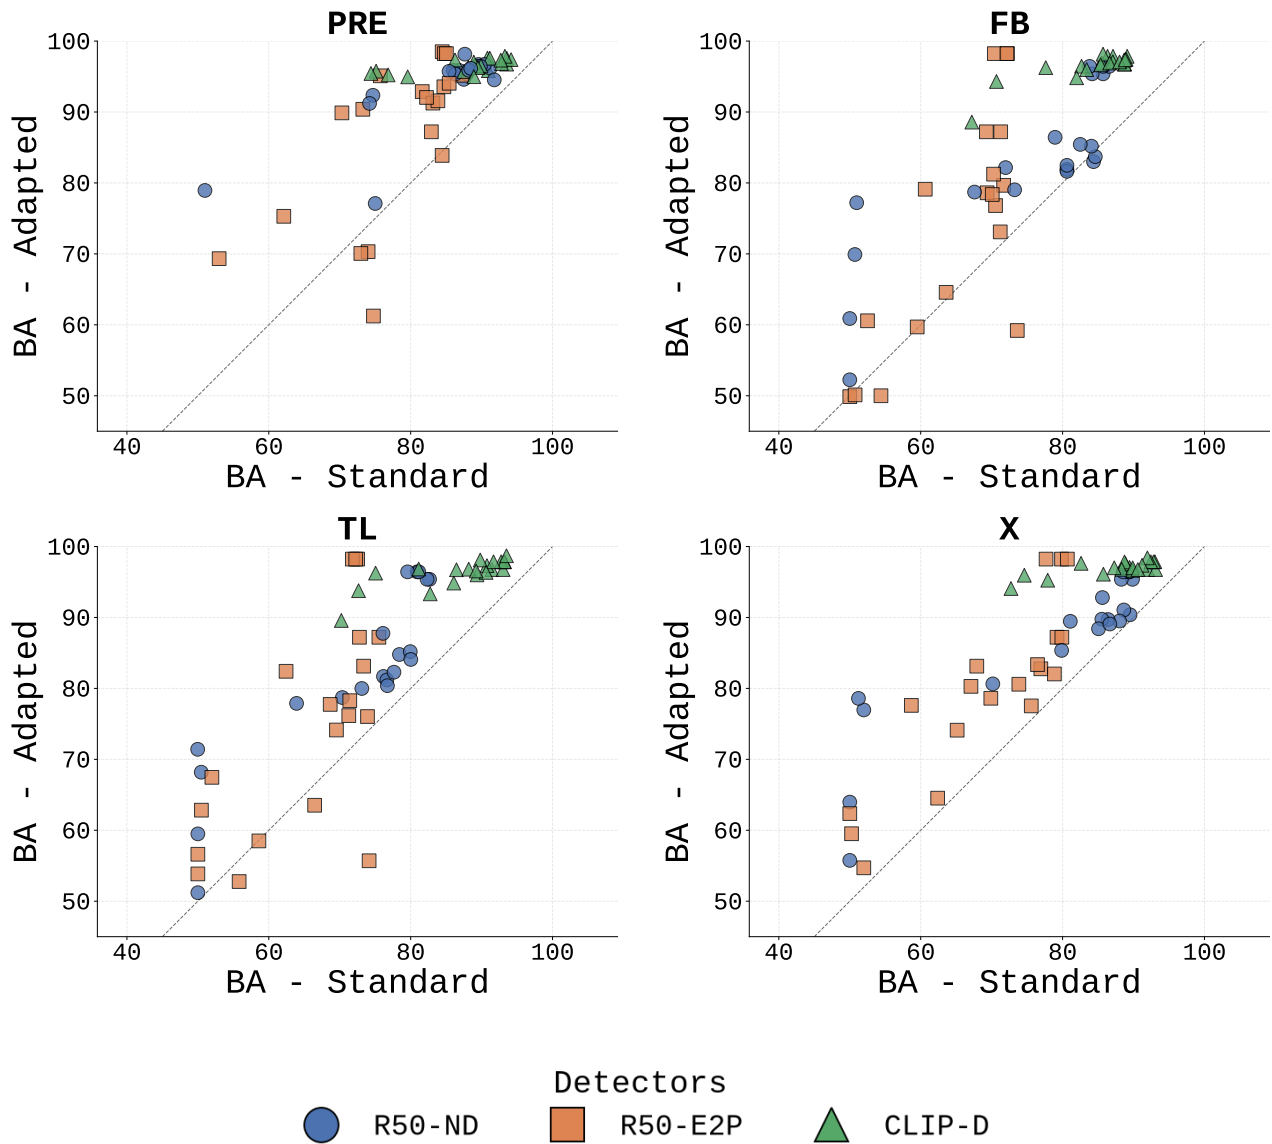


Figure 5: Scatter plots of the balanced accuracy for the standard and adapted detectors over the four testing sets.

	BA(%)			TPR(%)			TNR(%)			Δ AUC _(x10)	Visual example
Original	R50-ND	89.8		79.7		100.0		—			
	R50-E2P	84.7		72.0		97.5		—			
	CLIP-D	93.5		89.6		97.5		—			
AD-1	R50-ND	87.5	94.6	+7.1	83.0	91.2	+8.2	92.0	98.0	+6.0	+2.8
	R50-E2P	83.9	84.4	-0.6	76.4	80.8	+4.4	87.0	92.5	-5.5	+5.9
	CLIP-D	91.0	95.8	+4.9	93.4	96.2	+2.7	88.5	95.5	+7.0	+1.9
AD-2	R50-ND	87.9	95.4	+7.5	80.8	91.8	+11.0	95.0	99.0	+4.0	+2.1
	R50-E2P	82.9	87.2	+4.3	70.3	82.4	+12.1	92.0	95.5	-3.5	+9.0
	CLIP-D	93.5	96.8	+3.2	89.6	94.5	+4.9	97.5	99.0	+1.5	+1.5
AD-3	R50-ND	89.6	96.7	+7.1	79.1	93.4	+14.3	100.0	100.0	+0.0	+0.4
	R50-E2P	84.4	98.5	+14.1	70.9	100.0	+29.1	97.0	98.0	-1.0	+14.2
	CLIP-D	93.6	97.5	+4.0	90.1	95.6	+5.5	97.0	99.5	+2.5	+1.8
AD-4	R50-ND	90.4	96.4	+6.0	80.8	92.9	+12.1	100.0	100.0	+0.0	+0.4
	R50-E2P	84.7	98.2	+13.5	72.0	99.5	+27.5	97.0	97.5	-0.5	+13.7
	CLIP-D	94.2	97.4	+3.2	92.3	97.2	+4.9	96.0	97.5	+1.5	+1.2
AD-5	R50-ND	89.3	96.4	+7.1	78.6	92.9	+14.3	100.0	100.0	+0.0	+0.4
	R50-E2P	85.0	98.2	+13.2	73.1	99.5	+26.4	97.0	97.0	+0.0	+13.1
	CLIP-D	93.3	97.9	+4.6	89.6	96.7	+7.1	97.0	99.0	+2.0	+1.7
SS-TM01	R50-ND	91.2	96.2	+5.0	82.4	92.9	+10.4	99.5	100.0	-0.5	+0.5
	R50-E2P	81.6	92.9	+11.2	91.8	91.8	+0.0	71.5	94.0	+22.5	+13.0
	CLIP-D	90.8	97.6	+6.8	96.2	96.7	+0.5	85.5	98.5	+13.0	+2.3
SS-SP01	R50-ND	90.4	96.7	+6.3	80.8	93.4	+12.6	100.0	100.0	+0.0	+0.5
	R50-E2P	84.7	93.6	+8.9	87.4	90.1	+2.7	82.0	97.0	+15.0	+11.4
	CLIP-D	91.2	97.6	+6.4	92.3	96.2	+3.8	90.0	99.0	+9.0	+2.1
SS-SM01	R50-ND	89.8	96.4	+6.6	79.7	92.9	+13.2	100.0	100.0	+0.0	+0.5
	R50-E2P	87.3	95.2	+7.9	78.0	98.4	+20.3	92.0	96.5	-4.5	+9.9
	CLIP-D	92.8	96.8	+4.0	90.1	96.2	+6.0	95.5	97.5	+2.0	+1.9
SS-WN01	R50-ND	86.8	95.9	+9.1	73.6	91.8	+18.1	100.0	100.0	+0.0	+0.6
	R50-E2P	75.7	95.1	+19.4	54.9	96.7	+41.8	93.5	96.5	-3.0	+20.0
	CLIP-D	89.9	96.5	+6.6	92.3	94.5	+2.2	87.5	98.5	+11.0	+2.7
ST-BW01	R50-ND	87.6	98.2	+10.5	75.3	97.8	+22.5	98.5	100.0	-1.5	+0.4
	R50-E2P	62.1	75.3	+13.2	24.7	56.6	+31.9	94.0	99.5	-5.5	-3.6
	CLIP-D	75.1	95.8	+20.6	94.5	97.3	-2.7	53.0	97.0	+44.0	+4.5
ST-CN01	R50-ND	91.8	94.5	+2.7	84.1	89.6	+5.5	99.5	99.5	+0.0	+0.6
	R50-E2P	73.3	90.4	+17.1	86.3	94.5	-8.2	52.0	94.5	+42.5	+6.6
	CLIP-D	79.6	95.0	+15.4	93.4	96.2	-2.7	63.0	96.5	+33.5	+6.0
ST-CN11	R50-ND	86.0	95.9	+9.9	72.0	91.8	+19.8	100.0	100.0	+0.0	+1.9
	R50-E2P	83.1	91.3	+8.1	86.3	89.0	+2.7	80.0	93.5	+13.5	+10.4
	CLIP-D	88.9	97.0	+8.1	92.3	95.1	+2.7	85.5	99.0	+13.5	+2.7
ST-BBW	R50-ND	75.0	77.1	+2.1	91.2	100.0	-8.8	50.0	63.0	+13.0	+16.6
	R50-E2P	61.2	74.8	-13.5	72.0	100.0	-28.0	49.5	50.5	+1.0	+4.7
	CLIP-D	74.4	95.4	+21.0	92.9	97.8	-4.9	51.0	98.0	+47.0	+6.1
ST-CBW	R50-ND	51.0	78.9	+27.9	65.4	100.0	-34.6	2.0	92.5	+90.5	+49.3
	R50-E2P	53.0	69.3	+16.3	46.2	100.0	-53.8	6.0	92.5	+86.5	+1.0
	CLIP-D	76.8	95.2	+18.4	94.0	96.2	-2.2	57.5	96.5	+39.0	+5.9
ST-WG	R50-ND	74.7	92.4	+17.7	85.7	98.4	-12.6	51.0	99.0	+48.0	+13.6
	R50-E2P	70.3	74.0	-3.7	73.6	100.0	-26.4	48.0	67.0	+19.0	+3.5
	CLIP-D	88.1	96.3	+8.2	91.8	95.6	+3.8	84.5	97.0	+12.5	+3.4
ST-FT01	R50-ND	86.3	95.4	+9.1	73.1	91.2	+18.1	99.5	99.5	+0.0	+2.0
	R50-E2P	83.8	91.6	+7.7	79.7	90.7	+11.0	88.0	92.5	+4.5	+11.3
	CLIP-D	87.5	95.7	+8.2	93.4	94.5	-1.1	80.5	98.0	+17.5	+2.5
ST-VN01	R50-ND	74.2	91.2	+17.0	82.4	98.9	-16.5	49.5	100.0	+50.5	+17.5
	R50-E2P	70.1	73.0	-2.9	84.6	99.5	-14.8	46.5	55.5	+9.0	-3.1
	CLIP-D	86.3	97.3	+11.1	94.5	96.2	+1.6	78.0	98.5	+20.5	+2.7
ST-LN01	R50-ND	85.4	95.7	+10.3	75.8	94.0	+18.1	95.0	97.5	+2.5	+3.3
	R50-E2P	70.3	89.9	+19.6	90.1	97.3	+7.1	50.5	82.5	+32.0	+10.6
	CLIP-D	92.7	97.3	+4.6	93.4	95.6	+2.2	92.0	99.0	+7.0	+2.2
SJ-TR01	R50-ND	88.5	96.2	+7.7	76.9	92.3	+15.4	100.0	100.0	+0.0	+0.2
	R50-E2P	85.4	94.1	+8.6	92.9	95.6	+2.7	78.0	92.5	+14.5	+6.8
	CLIP-D	88.9	95.0	+6.1	92.3	94.0	+1.6	85.5	96.0	+10.5	+2.9
SJ-TR11	R50-ND	88.2	95.9	+7.7	76.4	91.8	+15.4	100.0	100.0	+0.0	+0.6
	R50-E2P	82.2	92.1	+9.8	77.5	95.6	+18.1	87.0	88.5	+1.5	+11.5
	CLIP-D	89.5	96.3	+6.8	94.0	94.5	+0.5	85.0	98.0	+13.0	+2.9

Figure 6: Performance of the standard (blue) and adapted (orange) detectors on the investigated presets for the PRE data.