

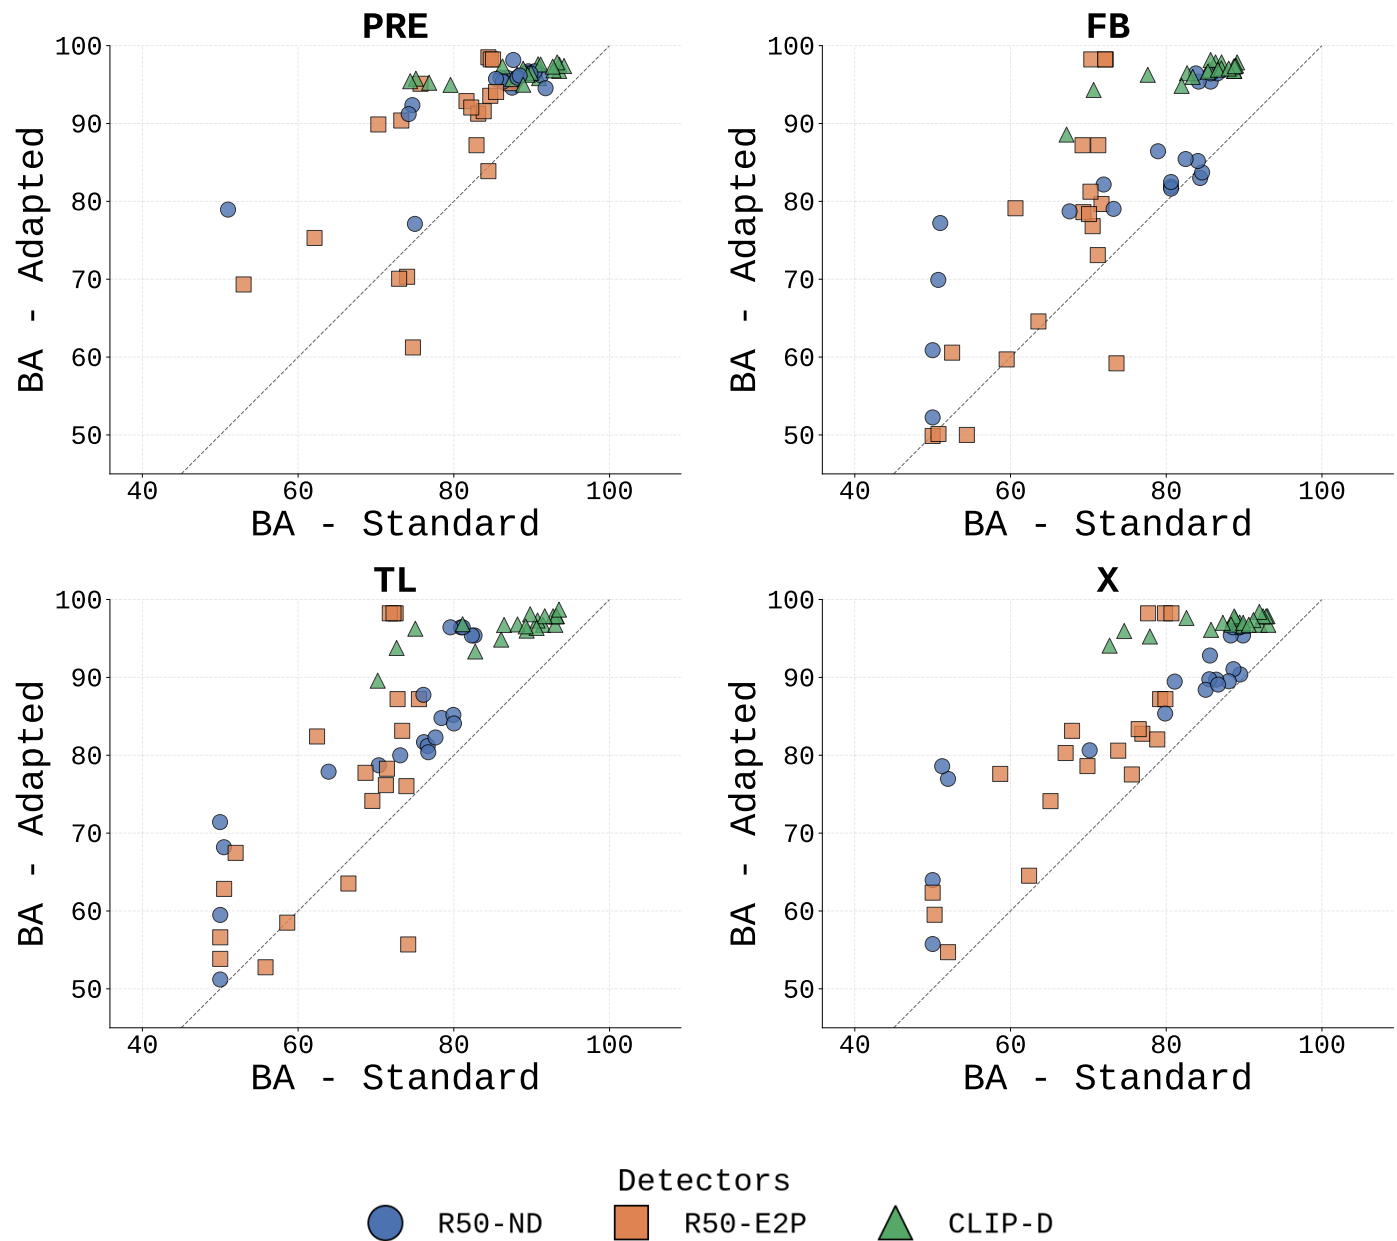



Figure 5: Scatter plots of the balanced accuracy for the standard and adapted detectors over the four testing sets.

	BA(%)			TPR(%)			TNR(%)			$\Delta\text{AUC}_{(\times 10)}$	Visual example
Original											
R50-ND	89.8			79.7			100.0			—	
R50-E2P	84.7			72.0			97.5			—	
CLIP-D	93.5			89.6			97.5			—	
AD-1											
R50-ND	87.5	94.6	+7.1	83.0	91.2	+8.2	92.0	98.0	+6.0	+2.8	
R50-E2P	83.9	84.4	-0.6	76.4	80.8	+4.4	87.0	92.5	-5.5	+5.9	
CLIP-D	91.0	95.8	+4.9	93.4	96.2	+2.7	88.5	95.5	+7.0	+1.9	
AD-2											
R50-ND	87.9	95.4	+7.5	80.8	91.8	+11.0	95.0	99.0	+4.0	+2.1	
R50-E2P	82.9	87.2	+4.3	70.3	82.4	+12.1	92.0	95.5	-3.5	+9.0	
CLIP-D	93.5	96.8	+3.2	89.6	94.5	+4.9	97.5	99.0	+1.5	+1.5	
AD-3											
R50-ND	89.6	96.7	+7.1	79.1	93.4	+14.3	100.0	100.0	+0.0	+0.4	
R50-E2P	84.4	98.5	+14.1	70.9	100.0	+29.1	97.0	98.0	-1.0	+14.2	
CLIP-D	93.6	97.5	+4.0	90.1	95.6	+5.5	97.0	99.5	+2.5	+1.8	
AD-4											
R50-ND	90.4	96.4	+6.0	80.8	92.9	+12.1	100.0	100.0	+0.0	+0.4	
R50-E2P	84.7	98.2	+13.5	72.0	99.5	+27.5	97.0	97.5	-0.5	+13.7	
CLIP-D	94.2	97.4	+3.2	92.3	97.2	+4.9	96.0	97.5	+1.5	+1.2	
AD-5											
R50-ND	89.3	96.4	+7.1	78.6	92.9	+14.3	100.0	100.0	+0.0	+0.4	
R50-E2P	85.0	98.2	+13.2	73.1	99.5	+26.4	97.0	97.0	+0.0	+13.1	
CLIP-D	93.3	97.9	+4.6	89.6	96.7	+7.1	97.0	99.0	+2.0	+1.7	
SS-TM01											
R50-ND	91.2	96.2	+5.0	82.4	92.9	+10.4	99.5	100.0	-0.5	+0.5	
R50-E2P	81.6	92.9	+11.2	91.8	91.8	+0.0	71.5	94.0	+22.5	+13.0	
CLIP-D	90.8	97.6	+6.8	96.2	96.7	+0.5	85.5	98.5	+13.0	+2.3	
SS-SP01											
R50-ND	90.4	96.7	+6.3	80.8	93.4	+12.6	100.0	100.0	+0.0	+0.5	
R50-E2P	84.7	93.6	+8.9	87.4	90.1	+2.7	82.0	97.0	+15.0	+11.4	
CLIP-D	91.2	97.6	+6.4	92.3	96.2	+3.8	90.0	99.0	+9.0	+2.1	
SS-SM01											
R50-ND	89.8	96.4	+6.6	79.7	92.9	+13.2	100.0	100.0	+0.0	+0.5	
R50-E2P	87.3	95.2	+7.9	78.0	98.4	+20.3	92.0	96.5	-4.5	+9.9	
CLIP-D	92.8	96.8	+4.0	90.1	96.2	+6.0	95.5	97.5	+2.0	+1.9	
SS-WN01											
R50-ND	86.8	95.9	+9.1	73.6	91.8	+18.1	100.0	100.0	+0.0	+0.6	
R50-E2P	75.7	95.1	+19.4	54.9	96.7	+41.8	93.5	96.5	-3.0	+20.0	
CLIP-D	89.9	96.5	+6.6	92.3	94.5	+2.2	87.5	98.5	+11.0	+2.7	

	BA(%)			TPR(%)			TNR(%)			$\Delta\text{AUC}_{(\times 10)}$		Visual example
ST-BW01												
R50-ND	87.6		+10.5	75.3		+22.5	98.5		-1.5	+0.4		
R50-E2P	62.1		+13.2	24.7		+31.9	94.0		-5.5	-3.6		
CLIP-D	75.1		+20.6	94.5		-2.7	53.0		+44.0	+4.5		
ST-CN01												
R50-ND	91.8		+2.7	84.1		+5.5	99.5		+0.0	+0.6		
R50-E2P	73.3		+17.1	86.3		-8.2	52.0		+42.5	+6.6		
CLIP-D	79.6		+15.4	93.4		-2.7	63.0		+33.5	+6.0		
ST-CN11												
R50-ND	86.0		+9.9	72.0		+19.8	100.0		+0.0	+1.9		
R50-E2P	83.1		+8.1	86.3		+2.7	80.0		+13.5	+10.4		
CLIP-D	88.9		+8.1	92.3		+2.7	85.5		+13.5	+2.7		
ST-BBW												
R50-ND	75.0		+2.1	91.2		-8.8	50.0		+13.0	+16.6		
R50-E2P	61.2		-13.5	72.0		-28.0	49.5		+1.0	+4.7		
CLIP-D	74.4		+21.0	92.9		-4.9	51.0		+47.0	+6.1		
ST-CBW												
R50-ND	51.0		+27.9	65.4		-34.6	2.0		+90.5	+49.3		
R50-E2P	53.0		+16.3	46.2		-53.8	6.0		+86.5	+1.0		
CLIP-D	76.8		+18.4	94.0		-2.2	57.5		+39.0	+5.9		
ST-WG												
R50-ND	74.7		+17.7	85.7		-12.6	51.0		+48.0	+13.6		
R50-E2P	70.3		-3.7	73.6		-26.4	48.0		+19.0	+3.5		
CLIP-D	88.1		+8.2	91.8		+3.8	84.5		+12.5	+3.4		
ST-FT01												
R50-ND	86.3		+9.1	73.1		+18.1	99.5		+0.0	+2.0		
R50-E2P	83.8		+7.7	79.7		+11.0	88.0		+4.5	+11.3		
CLIP-D	87.5		+8.2	93.4		-1.1	80.5		+17.5	+2.5		
ST-VN01												
R50-ND	74.2		+17.0	82.4		-16.5	49.5		+50.5	+17.5		
R50-E2P	70.1		-2.9	84.6		-14.8	46.5		+9.0	-3.1		
CLIP-D	86.3		+11.1	94.5		+1.6	78.0		+20.5	+2.7		

	BA(%)			TPR(%)			TNR(%)			$\Delta\text{AUC}_{(\times 10)}$	Visual example			
ST-LN01														
R50-ND	85.4		95.7	+10.3	75.8		94.0	+18.1	95.0		97.5	+2.5	+3.3	
R50-E2P	70.3		89.9	+19.6	90.1		97.3	+7.1	50.5		82.5	+32.0	+10.6	
CLIP-D	92.7		97.3	+4.6	93.4		95.6	+2.2	92.0		99.0	+7.0	+2.2	
SJ-TR01														
R50-ND	88.5		96.2	+7.7	76.9		92.3	+15.4	100.0		100.0	+0.0	+0.2	
R50-E2P	85.4		94.1	+8.6	92.9		95.6	+2.7	78.0		92.5	+14.5	+6.8	
CLIP-D	88.9		95.0	+6.1	92.3		94.0	+1.6	85.5		96.0	+10.5	+2.9	
SJ-TR11														
R50-ND	88.2		95.9	+7.7	76.4		91.8	+15.4	100.0		100.0	+0.0	+0.6	
R50-E2P	82.2		92.1	+9.8	77.5		95.6	+18.1	87.0		88.5	+1.5	+11.5	
CLIP-D	89.5		96.3	+6.8	94.0		94.5	+0.5	85.0		98.0	+13.0	+2.9	

Figure 6: Performance of the standard (blue) and adapted (orange) detectors on the investigated presets for the PRE data.