Network Infrastructures

A.A. 2020-2021
Prof. Francesca Cuomo

XDSL

- DSL (or xDSL), is a family of technologies that provide digital data transmission over the wires of a local telephone network.
- DSL originally stood for digital subscriber loop, although in recent years, many have adopted digital subscriber line as a more marketing-friendly term

Digital communications over the same analog infrastructures

2

xDSL Faminly

- ISDN Digital Subscriber Line (IDSL) → *2 copper wire instead of 1.*
- High Data Rate Digital Subscriber Line (HDSL)
- Symmetric Digital Subscriber Line (SDSL), a standardized version of HDSL
- Asymmetric Digital Subscriber Line (ADSL), a version of DSL with a slower upload speed
- ADSL "lite" (or g.lite)
- Rate-Adaptive Digital Subscriber Line (RADSL)
- Very High Speed Digital Subscriber Line (VDSL)
- Very High Speed Digital Subscriber Line 2 (VDSL2), an improved version of VDSL

3

Reasons for xDSL market

- More than 600 million copper wires worldwide
- Growing requests for data transmissions (mainly access to IP networks)
- Competition
- Deregulation
- Growing needs fro POTS in developing countries

4

An example:
copper wired access network Telecom Italia

- Number of network terminations: 33.576.600
- Numebr of Central Offices: 11.000
- Number of Street Cabinets: 150.000
- Amount of cables: above 105.700.000 km–pairs
- Mean distance from a CO and a user: 1,5 Km (1,2 Km in urban areas)

5

Some history

- In the early 1980s, the idea of a digital subscriber line to provide access to an integrated services digital network (ISDN) was initiated
  - The initial throughput requirement was 160 kbit/s
  - Investigate even higher transmission throughputs approaching T1 speeds
  - The project was named High bit rate DSL (HDSL)
- Lately the interest towards asymmetry arose (for Video on Demand services)
- Joe Lechleider at Bellcore (now Telcordia Technologies) developed ADSL in 1988 by placing wideband digital signals above the existing baseband analog voice signal carried between telephone company central offices and customers on conventional twisted pair cabling
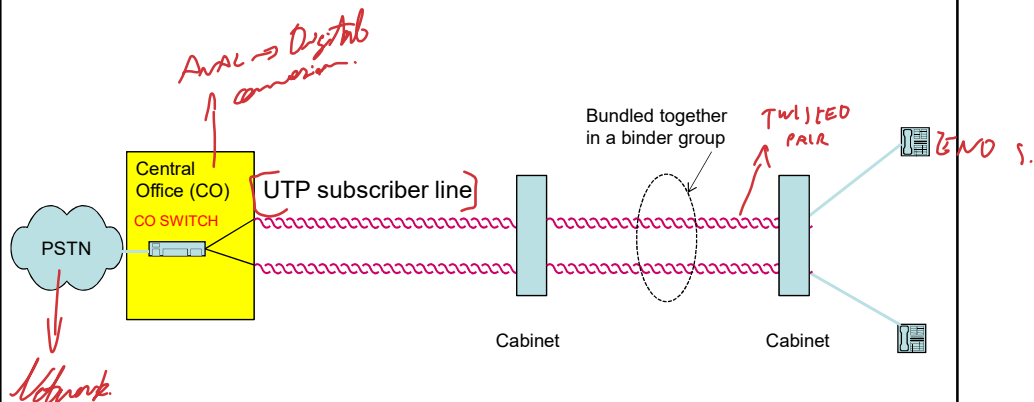
6

Current telco services

- Bandwidth comparisons with phone wire

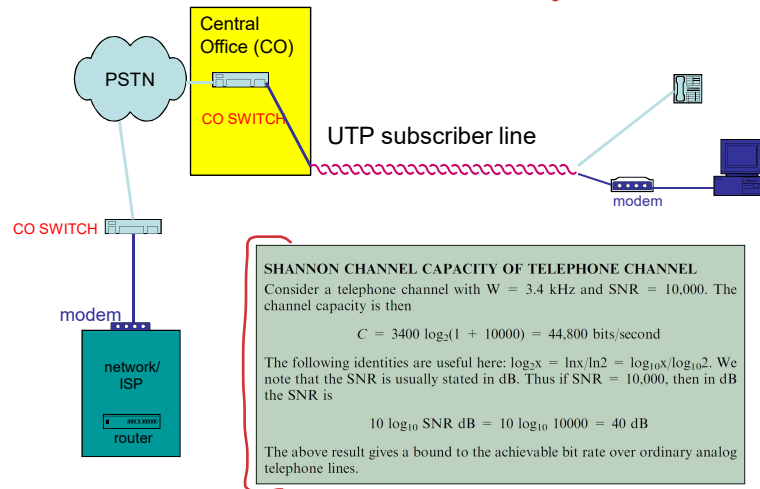| Service	Upper limit bandwidth
Voice service	3400Hz
ISDN(USA)	80kHz
ISDN(Germany)	120kHz
T1 Using 2B1Q	400kHz
ADSL	About 1MHz

7

Wiring Schematic pre-DSL

Central Office (CO)
CO SWITCH

UTP subscriber line

PSTN

Bundled together in a binder group

Cabinet

Cabinet

8

Analog (or V.90) modems

Screen A 8:34

Central Office (CO)

PSTN

CO SWITCH

UTP subscriber line

modem

CO SWITCH

modem

network/ISP

router

SHANNON CHANNEL CAPACITY OF TELEPHONE CHANNEL

Consider a telephone channel with $W = 3.4$ kHz and SNR $= 10,000$. The channel capacity is then

$$C = 3400 \log_2(1 + 10000) = 44,800 \text{ bits/second}$$

The following identities are useful here: $\log_2 x = \ln x / \ln 2 = \log_{10} x / \log_{10} 2$. We note that the SNR is usually stated in dB. Thus if SNR $= 10,000$, then in dB the SNR is

$$10 \log_{10} \text{SNR dB} = 10 \log_{10} 10000 = 40 \text{ dB}$$

The above result gives a bound to the achievable bit rate over ordinary analog telephone lines.

9

Current telco services

- Limitations of current telco networks to upgrade service:
  - Space of CO
  - Distance of user from CO
  - Internet problems for POTS and ISDN
  - Both types of data services use existing CO voice switch, not optimized for data
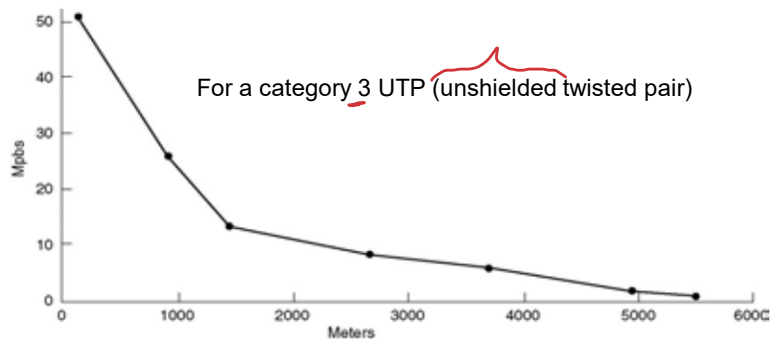- Need to put data services to be handled by Data Communication equipment

10

xDSL variations

- X = Variations:
  - Speed and distance
  - Symmetry   S/A
  - Support for POTS
  - Location of equipment

11

Bandwidth as a function of meters

For a category 3 UTP (unshielded twisted pair)

12

High Data Rate DSL: HDSL

- Most widely deployed form of DSL
- Created to provide leased-line T1 service
- Adaptive line equalization and 2B1Q (2 binary,
- 1 quaternary)
- Heavily used in cellular telephone buildouts
- Drawbacks:
  - No provision exists for analog voice
  - HDSL has crosstalks at both ends for symmetric
- HDSL-2 with a single wire pair is a promising alternative to HDSL with 2 or 4 wire pairs

13

Asymmetric DSL

- Original market driver: distribution of video on demand (VoD) (failed for this target)
- An ADSL local loop is for the exclusive use of he subscriber, with no contention for bandwidth on that local loop
- ADSL provides for passive transmission of analog voice service
- The distinguishing characteristic of ADSL over other forms of DSL is that the volume of data flow is greater in one direction than the other
- Providers usually market ADSL as a service for consumers to connect to the Internet in a relatively passive mode
  - able to use the higher speed direction for the "download" from the Internet but not needing to run servers that would require high speed in the other direction
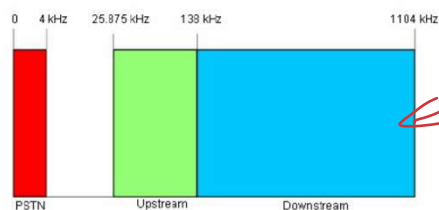
14

Speed

- Older ADSL standards can deliver 8 Mbit/s to the customer over about 2 km of unshielded twisted pair copper wire
- The latest standard, ADSL2+, can deliver up to 24 Mbit/s, depending on the distance from the central office

15

ADSL frequency bands

- ADSL uses two separate frequency bands, referred to as the upstream and downstream bands
- The upstream band is used for communication from the end user to the telephone central office
- The downstream band is used for communicating from the central office to the end user.
- With standard ADSL, the band from 25.875 kHz to 138 kHz is used for upstream communication, while 138 kHz –1104 kHz is used for downstream communication
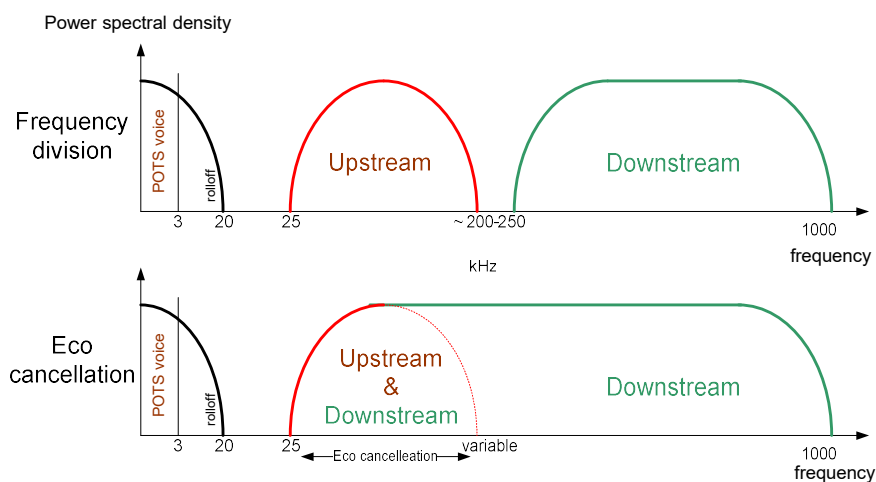

16

ADSL frequency allocation

Power spectral density
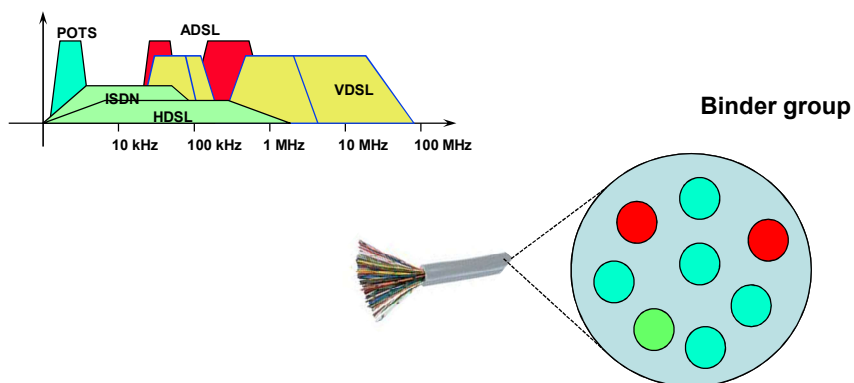
Frequency division

POTS voice | rolloff | Upstream | Downstream

3 20 25 ~ 200-250 1000
frequency

kHz

Eco cancellation

POTS voice | rolloff | Upstream & Downstream | Downstream

3 20 25 variable 1000
frequency

Eco cancelleation

17

Cross-talks

- Wires sharing the same cable interfere one each other

POTS

ADSL

ISDN

HDSL

VDSL

10 kHz 100 kHz 1 MHz 10 MHz 100 MHz

Binder group

18

ADSL and cross-talks

- Two kinds of cross-talk noise exist: far-end cross-talk (FEXT) and near-end cross-talk (NEXT).

- Depend on:
  - The power spectral density of the transmitted signal
  - The number of twisted pairs in the same cable
  - The overlapping of bandwidths of the useful signal and the interfering ones

- Crosstalk typically increases with frequency→ significant impairment for high speed DSL

19

Eco cancellation: cancel the return of what is FEXT → Crosstalk

- FEXT is the cross-talk between a transmitter and a receiver placed on opposite sides of the cable
- FEXT signals travel the entire length of the channel
- Since for ADSL "short" cables are used, the signal carried on other pairs, even though coming from far away, are not strongly attenuated and create interferences that affect other pairs.
- To reduce this kind of noise a cable usually doesn't contain more than a dozen twisted pairs.

EXIST ONLY IF US HAVE HIGH FRQ. AT THE SAME TIME.

(handwritten annotation)
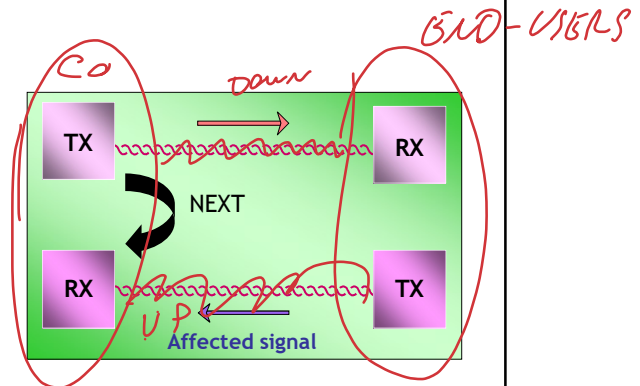
TX → RX

FEXT

TX → RX

Affected signal
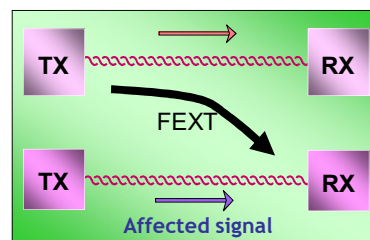
20

NEXT

- NEXT is the cross-talk between a transmitter and a receiver placed on the same side of the cable;

Receiver's signals are softer than transmitter's one, since come from far away and thus there is a strong interference which reduces quality of useful received data.
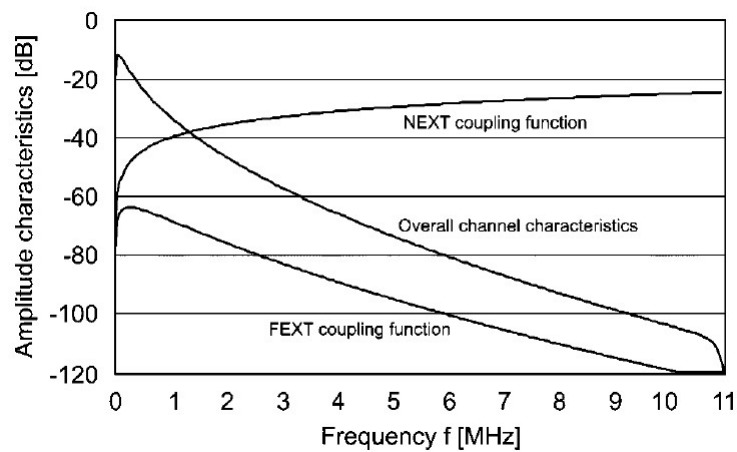
NEXT is one of the reason of the frequency division for upstream and downstream in ADSL.

21

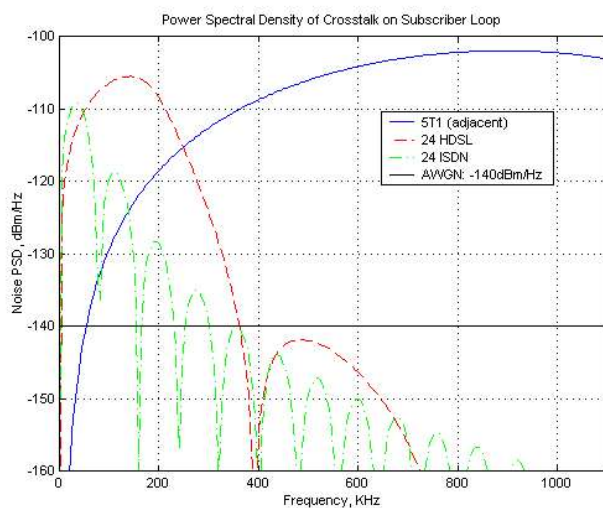# Average NEXT and FEXT coupling functions

Local loop lenght= 1 Km

22

Crosstalk on Line

Power Spectral Density of Crosstalk on Subscriber Loop

Legend:
- 5T1 (adjacent)
- 24 HDSL
- 24 ISDN
- AWGN: -140dBm/Hz

Y-axis: Noise PSD, dBm/Hz
X-axis: Frequency, KHz

23

Status at an ADSL modem

Home

Technicolor Gateway

Connessione a banda larga

    Connessione DSL

    Servizi Internet

    WAN-Sensing

Casella degli strumenti

Rete domestica

Guida

Home > Connessione a banda larga > Connessione DSL

Connessione DSL

▶ **Informazioni collegamento**

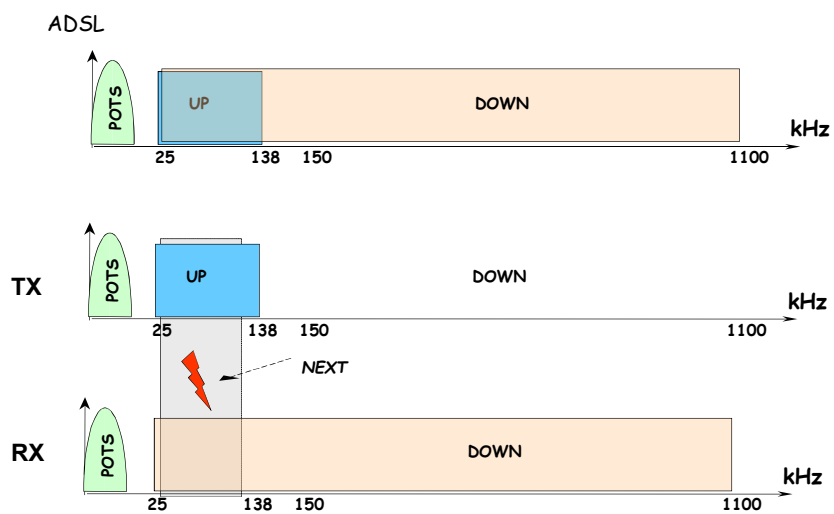|	
Tempo di operatività:	0 giorni, 0:09:27
Tipo DSL:	ITU-T G.992.5
Larghezza di banda (upload/download) [kbps/kbps]:	1.022 / 2.042
Dati trasferiti (inviati/ricevuti) [MB/MB]:	1,79 / 21,60
Potenza di output (upload/download) [dBm]:	12,0 / 19,2
Attenuazione linea (upload/download) [dB]:	19,7 / 35,5
Margine SN (upload/download) [dB]:	6,9 / 10,3
Sistema ID fornitore (locale/remoto):	TMMB / ----
Chipset ID fornitore (locale/remoto):	BDCM / BDCM
Perdita di framing (locale/remoto):	0 / 0
Perdita di segnale (locale/remoto):	0 / 0
Perdita di potenza (locale/remoto):	0 / 0
Perdita del collegamento (remoto):	-
Secondi errore (locale/remoto):	0 / 0
Errori FEC (upload/download):	0 / 7.703
Errori CRC (upload/download):	0 / 0
Errori HEC (upload/download):	0 / 0

24

Filtering: splitters

- It is necessary to install appropriate frequency filters at the customers premises to avoid interferences with the voice service
  - either a splitter is installed before connecting the line to phone / DSL modem
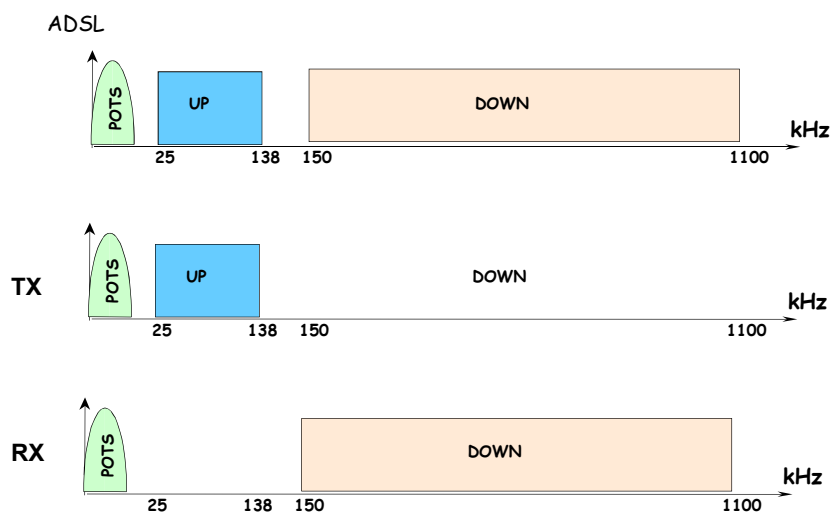 - or DSL signal is "filtered off" at each phone by use of a low pass filter, also known as microfilter.

25

Echo cancelled

ADSL

| POTS | UP | DOWN | kHz |

25   138   150   1100

TX

| POTS | UP | DOWN | kHz |

25   138   150   1100

NEXT

RX

| POTS | DOWN | kHz |

25   138   150   1100

26

Reduced NEXT or FDD

ADSL

| POTS | UP | DOWN | kHz |

25 138 150   1100

TX

| POTS | UP | DOWN | kHz |

25 138 150   1100

RX

| POTS | DOWN | kHz |

25 138 150   1100

27

ADSL: Modulations

Creation

- Modulation: CAP
  - CAP stands for Carrier-less Amplitude/Phase modulation, and describes a version of QAM in which incoming data modulates a single carrier that is then transmitted down a telephone line.
  - The carrier itself is suppressed before transmission (it contains no information, and can be reconstructed at the receiver), hence the word "carrier-less" (single carrier but suppressed)

Dilation work well when the channel behaves well, so

28

ADSL: Modulations

- Modulation: DMT (Discrete Multi-Tone) (multicarrier)
    – 256 sub-bands of 4,3125 kHz each, so occupying 1.024MHz
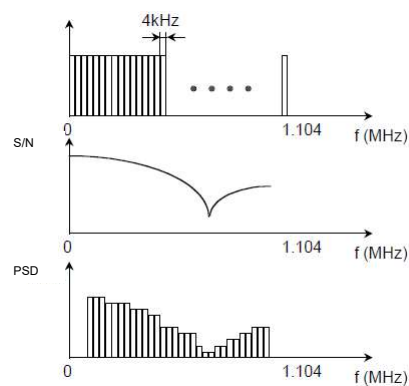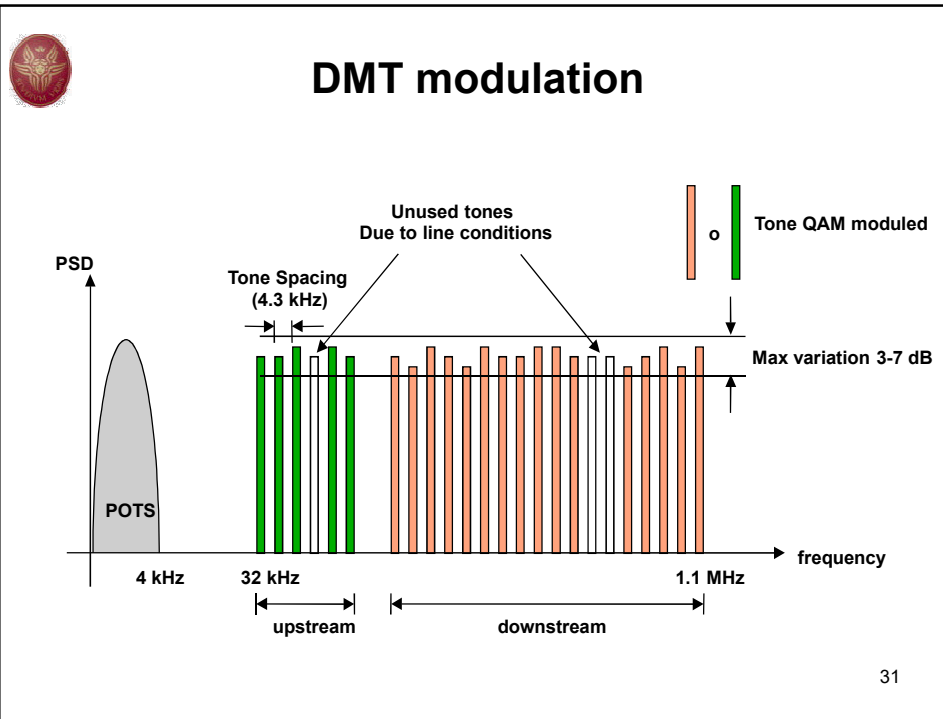   – Each sub-band is QAM64 modulated for clean sub-bands, down to QPSK for noisier lines
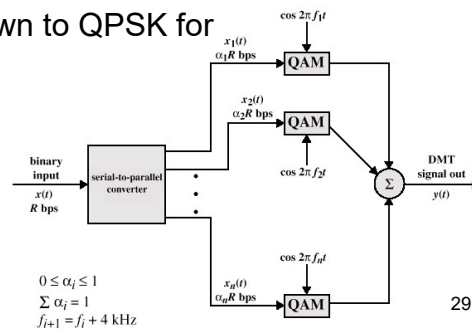
29

Principle of DMT modulation

- Divide the operational ADSL bandwidth into very small subchannles
- Discrete carriers (or tones) are used in the center of each data subchannel
- These carriers are used to transmit data independently in each subcarrier by means of a specified QAM modulation.

30

DMT modulation

Unused tones
Due to line conditions

o **Tone QAM moduled**

PSD

Tone Spacing (4.3 kHz)

Max variation 3-7 dB

POTS

frequency

4 kHz **32 kHz** **1.1 MHz**

upstream **downstream**

31

DMT modulation

- Independent subchannels can be manipulated individually with consideration of the line conditions
- If a subchannel is experiencing external interference it may not be used in favor of other subchannles
- DTM can dynamically adapt the data rate to the line conditions
- Theoretical maximum upstream bandwidth:
  - 25 channels X 15 bit/s/Hz/channel X 4 KHz= 1.5 Mbit/s
- Theoretical maximum downstream bandwidth:
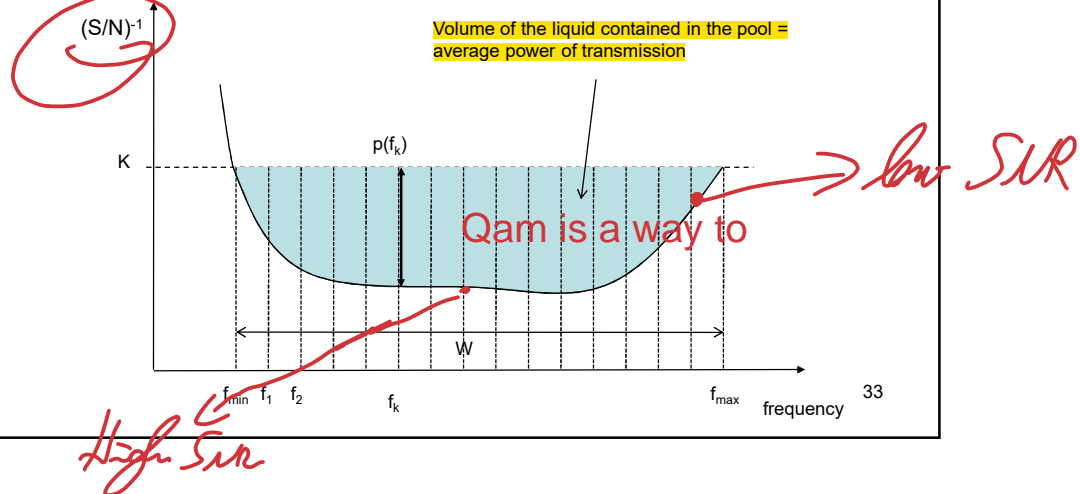 - 249 channels X 15 bit/s/Hz/channel X 4 KHz= 14.9 Mbit/s

Spectral efficiency
Depends on SNR

32

Water filling

- The signal power for each subcarrier is determined as the depth of the liquid in a pool
- Knowing the discrete values of $p(f_k)$ for each subcarrier f_k one may deduce the number of bit per simbol to associate to the QAM costellation used in each subchannel

Volume of the liquid contained in the pool = average power of transmission

Qam is a way to

$\rightarrow$ low SNR

High SNR

33

ADSL: Modulation

- **CAP and DMT compared for ADSL** (see next Table)
  - **Adaptive equalizer is required for CAP** since noise characteristics vary significantly across the frequency passband.
  - **DMT has the speed advantage over CAP**
- DSP advances will enable the technologies to converge in cost and function

34

Comparison of CAP and DMT for ADSL

	CAP	DMT
Power consumption	Lower, fewer gates	Higher peak/average, but will likely narrow gap
Forward carriers	1	256
Return carriers	1	32
Increment	320 Kb	32 Kb
Adaptive equalizers	Needed	None
Licensing	Globespan	Many sources
Standardization	In process	ITU and ANSI
Key competitors	Globespan, Paradyne, Westell	Conexant, Cisco, Alcatel, Amati (now Texas Instruments), Westell, Efficient Networks

CAP: Carrierless AM/PM
DMT: Discrete Multi-Tone

35

ADSL: Architecture

- CAP and DMP are coming together on further architectural elements of an ADSL system
- ADSL Forum provides much information (www.adsl.com)
- Content providers transmit information to the CO over the A9 interface (not shown) and the A4 interface.
- ATU-C: ADSL Transmission Unit – CO
  - Embedded in a line card in the DSLAM
  - One ATU-C per subscriber

36

ADSL reference model

Central Office (CO)
CO SWITCH
PSTN
POTS-C
POTS-R
network/
ISP
Analog
modem
UTP
POTS
SPLITTER
POTS
SPLITTER
PDN
router
DSLAM
ATU-C
WAN
ATU-R

(handwritten annotations: "IDENTICAL TO", "MODEM", "Modulation", "Filter frequency for telephone and for internet")
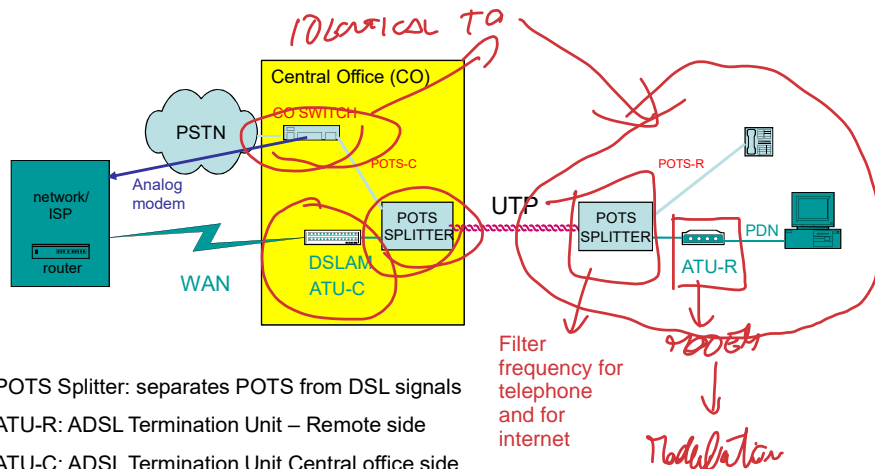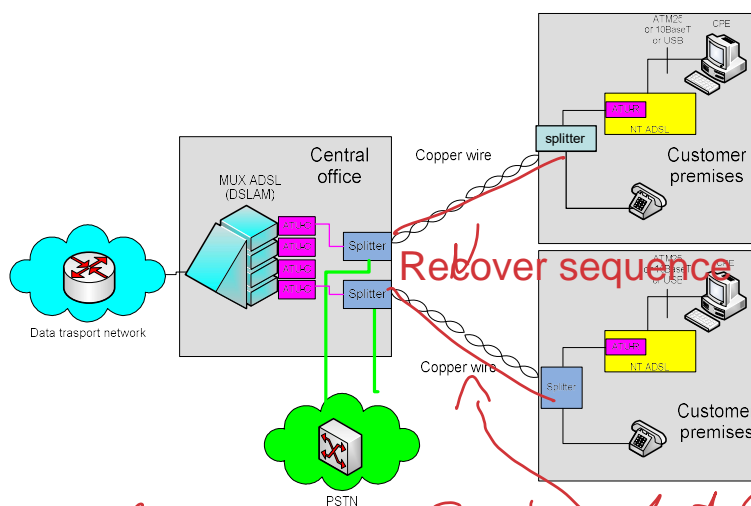
POTS Splitter: separates POTS from DSL signals

ATU-R: ADSL Termination Unit – Remote side

ATU-C: ADSL Termination Unit Central office side

DSLAM: DSL Access Multiplexer

37

More Detail on an End-to-End Design

Central
office
MUX ADSL
(DSLAM)
Copper wire
splitter
ATM25
or 10Base/T
or USB
CPE
Customer
premises
Data trasport network
Splitter
Splitter
Recover sequence
Copper wire
Splitter
Customer
premises
PSTN

(handwritten annotations: "REM for licaus", "R.N.", "1 at CO", "1 at END USR")

38

ADSL: Principles of Operation

- Two services
  - Transparent access to legacy voice service
  - High-speed digital service
- Voice service
  - POTS splitters used in home shunt the frequencies below 3400Hz to POTS wiring
  - Frequencies above the voice band are for high-speed data service to get to the ATU-R

39

ADSL: Architecture

- ATU-R: ADSL Transmission Unit – Remote
  - Supports a multidrop or shared-home topology
- ATU-C: ADSL Transmission Unit – Central
  - ATU-C and ATU-R engage in physical-layer negotiations between the home and the CO and they can be considered modems
  - Keep management statistics, such as SNR at the physical layer; packet counts at the network layer, receive software updates; and be remotely manageable by the carrier
- POTS splitter (PS)
  - A low-pass/high-pass filter

40

ADSL: Architecture

- ATU-C and ATU-R operations
  - Concerned with physical layer
  - Frequency allocation:
    - » Bandwidth on the phone wire is divided into three parts:
      - Legacy analog POTS service: below 3400Hz
      - Upstream digital service: 25-200kHz
      - Downstream digital service: 25/250-1000kHz (Echo cancellation/FDM: frequency division multiplexing)
  - Echo cancellation
    - » Both sides talk at the same time
    - » More bandwidth efficiently than FDM
    - » More complex and expensive
  - Rate adaption

41

CPE interfaces

- 10baseT
  - 10Mbit/s on a 100m twisted pair
  - widely available on PCs
- ATM25
  - 25Mbit/s on a 100m twisted pair
  - Point-to-point
  - Not very common
  - More expensive
- USB
  - 12Mbit/s till 30m
  - widely available on new genartion PCs
- Wi-Fi

42

ADSL: Architecture

- DSL Access Multiplexer (DSLAM)
  - Primary functions:
    - » House a set of ATU-C interfaces
    - » Multiplex traffic
    - » Demultiplex traffic
    - » Negotiate line speed
    - » Serve as a central management platform
  - Locations:
    - » CO, adjacent site to CO, remote terminal, customer premises
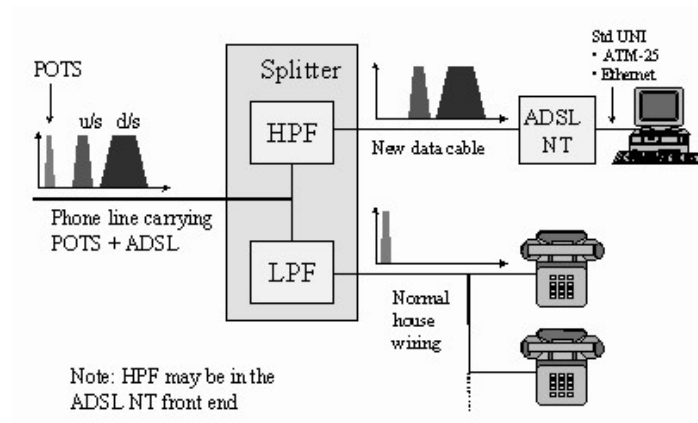 - Current DSALMs may include up t a few hundreds

43

CO elements

POTS splitter (4 customers)

ADSL units (4 customers)

Network unit
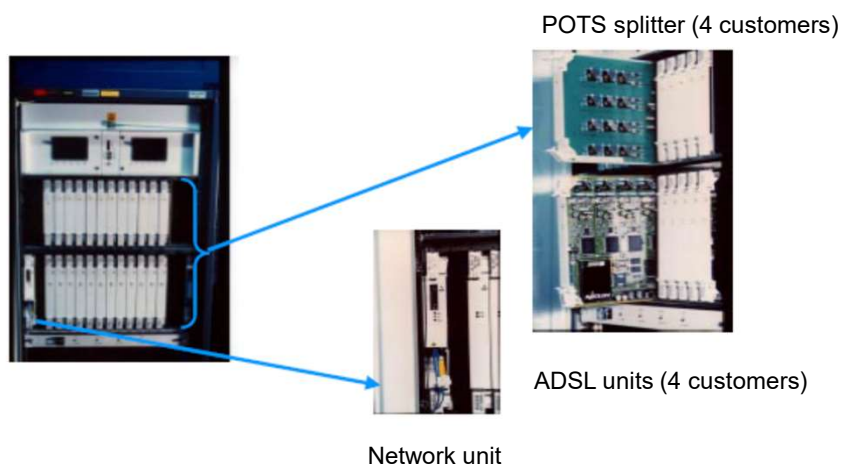
44

In-home configuration

POTS

u/s d/s

Phone line carrying
POTS + ADSL

Splitter

HPF

LPF

New data cable

Std UNI
· ATM-25
· Ethernet

ADSL
NT

Normal
house
wiring

Note: HPF may be in the
ADSL NT front end

45

Splitters

Splitter separates POTS from DSL signals

– Must guarantee lifeline POTS services

– Hence usually passive filter

– Must block impulse noise (e.g. ring) from phone into DSL

• It is not a simple cascade of a lowpass [0, 25 KHz] filter with a passband [25 KHz, 1,104 kHz] filter but a multiband (or hybrid) filter

46

Splitter
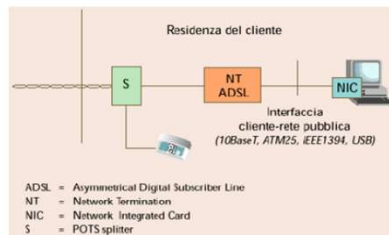
- Splittered
- Distributed splitters
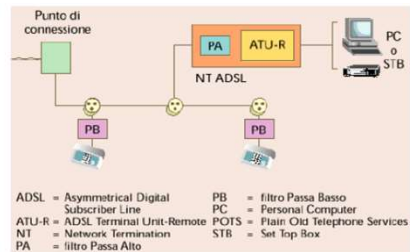
- Splitterless (g.lite)
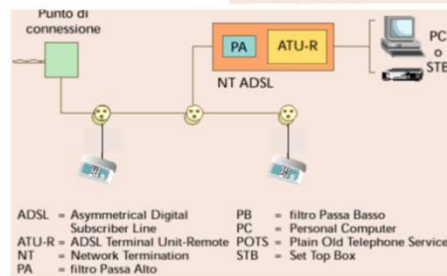
47

ADSL Protocol Architecture

Upper layer Protocols	Upper layer Protocols
IP	IP
PPP	PPP
AAL5	AAL5
ATM	ATM
ADSL	

DSL client   Telco CO   session management   Internet or outside n/w
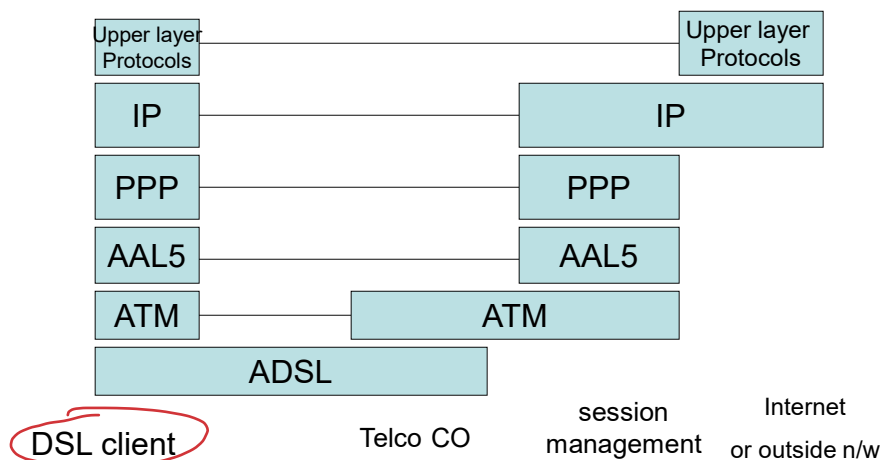
48

ADSL Architecture – user side

PC with ATM/ADSL adapter

Application
TCP/IP
Encapsulation
AAL5/ATM
ADSL

ADSL

PC with Ethernet adapter

Bridging modem

Application
TCP/IP
Ethernet

Ethernet bridging	
	RFC1483
Ethernet	ATM
	ADSL

ADSL

PC with Ethernet adapter

Routing modem

Application
TCP/IP
Ethernet

IP routing	
	Encapsulation
Ethernet	ATM
	ADSL

ADSL

49

ADSL Architecture – network side

IP
Proto-collo di linea
Fisico

IP	
	PPP
Proto-collo di linea	AAL5
	ATM
Fisico	Fisico

ATM	ATM
Fisico	DSL

IP
PPP
AAL5
ATM
DSL

Router

DSLAM

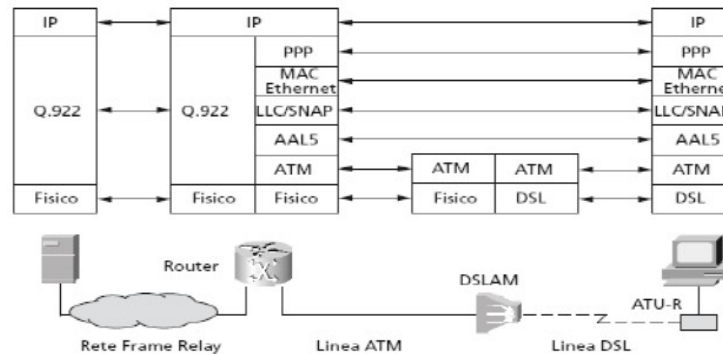ATU-R

Rete IP

Rete ATM

Linea DSL
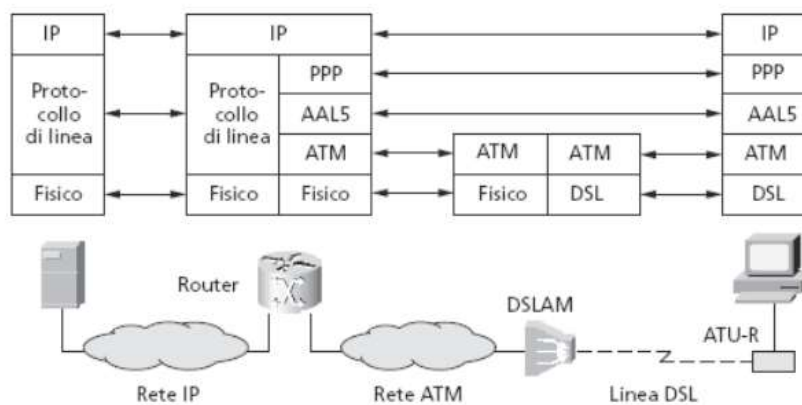
(da A. Pattavina, Reti di Telecomunicazione, 2° ed.)

50

ADSL Architecture – network side

51

ADSL: Principles of Operation

- Bit rate negotiation
  - Between ATU-R and ATU-C
  - Four start-up rate options, multiple of 32kbps
  - The entire process is about to take 12~20s (retaining period)
- Autoconfiguration
  - Configuring IP addresses & software filters to ATU-R

52

ADSL: Principles of Operation

- Benefits and challenges of rate adaption
  - Increases bit rate for customers with good phone wire
  - Covers greater distances for service providers
- Challenges:
  - Technical:
    - » What metrics, algorithms and measurements?
    - » Agreement on different ATU-Rs and ATU-Cs
    - » How to synchronize information?
- Marketing:
 - How to set pricing and bandwidth guarantees?

53

Very high data rate DSL

- VDSL pushes to the limit what can be transmitted over 24-gauge copper pairs.
- Service options:

Upstream	Downstream	Distance
12.96 Mbps	12.96 Mbps	1000 m
2 Mbps	25.92 Mbps	1000 m
25.84 Mbps	25.92 Mbps	300 m
2 Mbps	51.84 Mbps/STS-1	300 m

- Key to fastest bit rate possible is to have the shortest possible length of copper wire
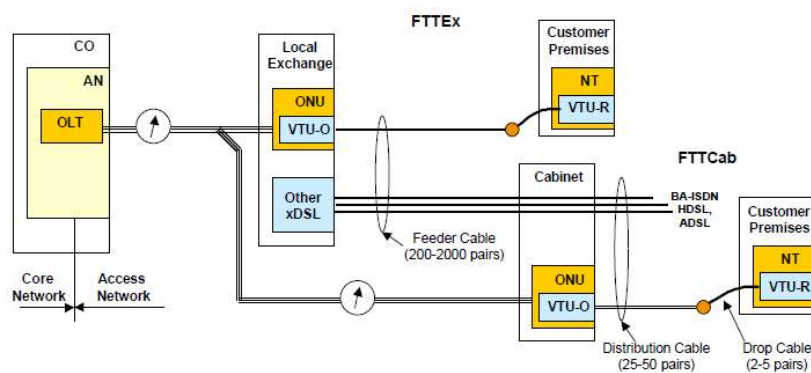
54

VDSL Architecture

VDSL interface in the ONU

CO — Fiber optic — ONU (LT) — Copper wire — S — NT VDSL
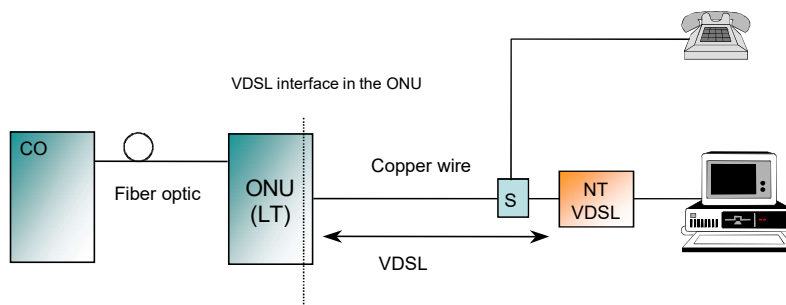
VDSL

ONU: Optical Network Unit
S: POTS splitter
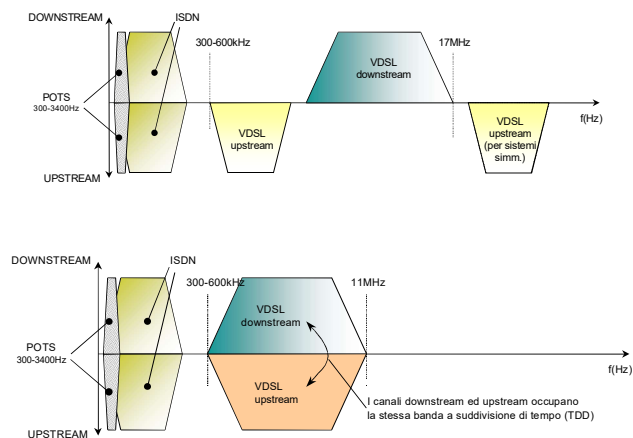NT VDSL: Network termination VDSL

55

Typical configuration

FTTEx

FTTCab

CO
AN
OLT

Local Exchange
ONU
VTU-O

Other xDSL

Customer Premises
NT
VTU-R

Cabinet
ONU
VTU-O

Customer Premises
NT
VTU-R

BA-ISDN HDSL, ADSL

Core Network
Access Network

Feeder Cable (200-2000 pairs)

Distribution Cable (25-50 pairs)

Drop Cable (2-5 pairs)

AN - access network
ONU - optical network unit
VTU - VDSL transmission unit

56

VDSL

FDD solution

TDD solution

57

Technology evolution
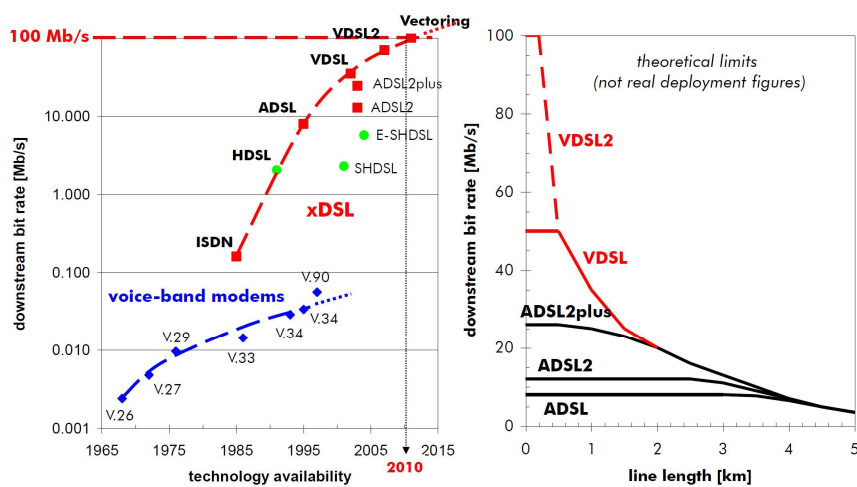
58

DSL comparison

	Modulation Scheme	Downstream Bit Rate	Upstream Bit Rate	POTS Support	Comments
ISDN	2B1Q	64 Kbps, 128 Kbps	64 Kbps, 128 Kbps	No	ANSI T1.601 Uses 4B3Q coding in some European countries
IDSL	2B1Q	128 Kbps	128 Kbps	No	Uses ISDN TA
HDSL	2B1Q	Up to 2 Mbps	Up to 2 Mbps	No	Uses four wires; current T1 service
HDSL-2	PAM-16	2 Mbps	2 Mbps	No	Uses two wires; not rate-adaptable
SDSL (ETSI)	2B1Q	2 Mbps	2 Mbps	Yes	Uses two wires; rate adaptable
G.Lite	DMT	2 Mbps	512 Kbps	Yes	ITU G.992.2
ADSL	CAP	1.5 Mbps to 6 Mbps	64 Kbps to 800 Kbps	Yes	Mostly Paradyne
ADSL	DMT	1.5 Mbps to 7 Mbps	64 Kbps to 800 Kbps	Yes	ANSI T1.413
Multiple Virtual Line (MVL)	CAP	768 Kbps	768 Kbps	Yes	Paradyne
One Megabit Modem	QAM	1 Mbps	320 Kbps	Yes	Proprietary to Northern Telecom; resides in Nortel loop carrier system
VDSL	QAM/CAP DMT	12.96 Mbps to 51.84 Mbps	1.5 Mbps to 3 Mbps	Yes	Range of 300 meters for top speeds; ANSI T1.E1.4, ETSI and ITU Study Group 15

59

XDSL family

| Family	Racc. ITU	Name	Data	Maximum capacity (Mbit/s)
ADSL	G.992.1	G.dmt	1999	7 down 0.8 up
ADSL2	G.992.3	G.dmt.bis	2002	8 down 1 up
ADSL2+	G.992.5	ADSL2plus	2003	24 down 1 up
ADSL-RE	G.992.3	Reach Extended	2003	8 down 1 up
SHDSL	G.991.2	G.SHDSL	2003	5,6 up/down
VDSL	G.993.1	Very-High-data-rate DSL	2004	55 down 15 up
VDSL2-LR	G.993.2	Very-High-data-rate DSL2 Long Reach	2005	55 down 30 up
VDSL-SR	G.993.2	Very-High-data-rate DSL2 Short Reach	2005	100 up/down

60

Challenges to xDSL

- Technical:
  - Loop qualification
  - Crosstalk: shared media creates a loss of QoS
  - Bridged taps: a legacy of phone wiring installation practices of Y form, which can be a significant impairment for DSL services for the echo
  - Powering remote terminals
  - Spectral masking
  - Impulse noise
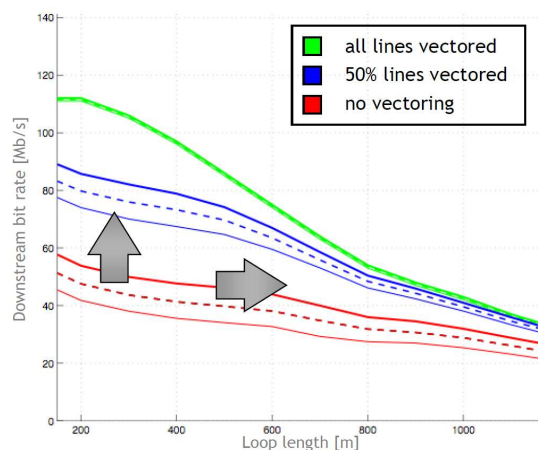 - ATU-R maintenance

61

VDSL Vectoring

Crosstalk = dominant disturber for VDSL2

VDSL Vectoring = Noise Cancellation

- measure crosstalk from each line into all other lines in binder
- cancel the noise with an anti-phase signal

62

VDSL Vectoring

- *Crosstalk cancelling by injecting an "anti-signal" on each crosstalk-impaired line*
  - Requires full synchronization over the full vectored system
  - All data samples are shared between all the lines
  - Requires calculation of the "anti-signals"
  - Requires a crosstalk estimating mechanism to derive the crosstalk coefficients
  - Mechanism specified in ITU-T G.993.5 (G.vector) standard for DSLAM/CPE interoperability
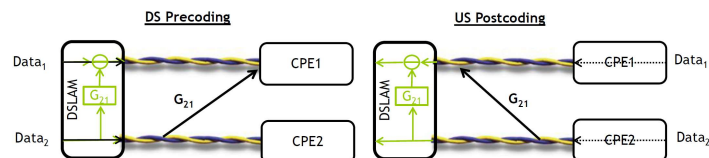
63

Vectoring principle
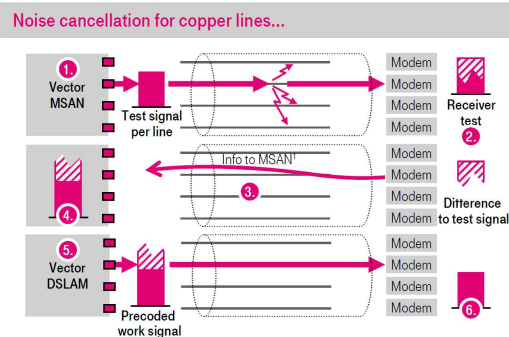
64

Some References

- http://www.cisco.com/univercd/cc/td/doc/cisintwk/ito_doc/adsl.htm
- http://www.adsl.com
- Book: Balaji Kumar, Padmanand Warrier "XDSL Architecture", Publisher: *McGraw-Hill* Companies (October 25, 1999)
- BooK: Maurice Gagnaire "Broadband Local Loops for High-Speed Internet Access" (Artech House Telecommunications Library) (2003)
- An Overview of G.993.5 Vectoring https://www.broadband-forum.org/download/MR-257_Issue-2.pdf

65

Appendix:
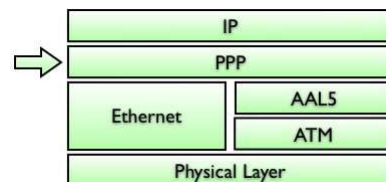## Point to Point Protocol: summary

- PPP -designed for simple links to transport packets between two peers
- PPP encapsulation provides for multiplexing of different network-layer protocols simultaneously over the same link
- PPP provides a Link Control Protocol (LCP) which negotiates the establishment and termination of a PPP link.
- LCP also negotiates the options for encapsulation format, authentication and link quality monitoring
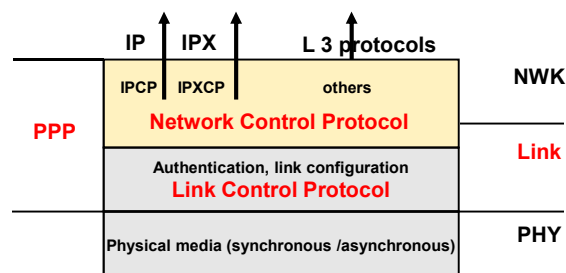
66

PPP

- It is used together with ADSL for its ability to directly connect the user to the Central Office of its ISP and its important functions like: authentication, authorization, automatic configuration of network interfaces and DHCP support.
- In the majority of European countries ADSL is based on the ATM protocol so PPP is encapsulated inside ATM cells (PPPoA).
- Nonetheless ADSL can stand on top of Ethernet and be incapsulated in Ethernet Frames (PPPoE).

IP
PPP

Ethernet	AAL5
	ATM

Physical Layer

67

PPP: protocol architecture

IP   IPX   L 3 protocols

		NWK
IPCP	IPXCP	others
Network Control Protocol		

PPP

Link

Authentication, link configuration
Link Control Protocol

PHY

Physical media (synchronous /asynchronous)

•LCP
•Establishment, control and termination of the link
  – Parameters negotiation (kind of authentication, compression, …)
  – Authentication
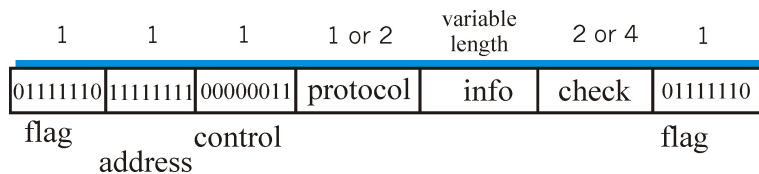 – Control and termination of the link

•NCP
•Family of protocols used to configure the network layers
  – Configuration of specific parameters of the network layers
  – A different module for each different network protocol

68

PPP Encapsulation

- The Protocol field identifies the datagram encapsulated in the information fiel.
- Information filed contains the datagram and could be zero or more octets up to a Maximum Receive Unit (MRU)
- The default MRU value is 1500 octets ,though it could vary by negotiation
- The Information field may be padded up to the MRU number of octets

1	1	1	1 or 2	variable length	2 or 4	1
01111110	11111111	00000011	protocol	info	check	01111110

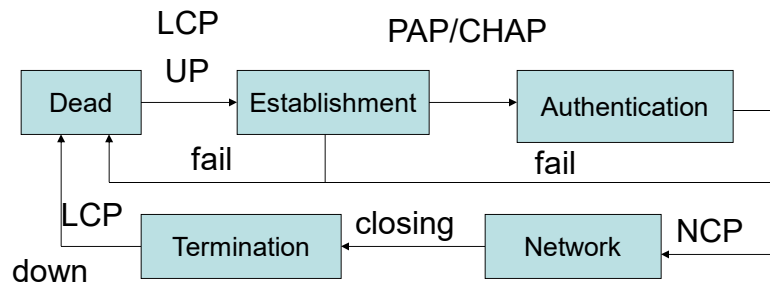flag   address   control   flag

69

PPP Encapsulation

- The Protocol field identifies the datagram encapsulated in the information field.
- Information filed contains the datagram and could be zero or more octets up to a Maximum Receive Unit (MRU).
- The default MRU value is 1500 octets ,though it could vary by negotiation.
- The Information field may be padded up to the MRU number of octets.

70

PPP Link Operation.

LCP   PAP/CHAP

UP

| Dead | → | Establishment | → | Authentication |

fail   fail

LCP   closing   NCP

down | Termination | ← | Network |

•

71

Link Establishment

- Link establishment phase uses the Link control protocol.
    - Link Configuration Options
        » The Maximum Receive Unit size.
        » Authentication and protocol to be used for authentication
        » Protocol Field Compression
        » Link quality monitoring
        » Magic number option for detecting looped back links.
        » Address and Control field compression

72

Link Establishment Process
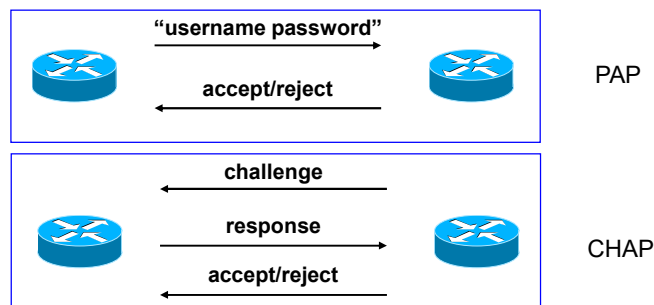
Configure request

Peer   Configure Ack/Nak   Peer
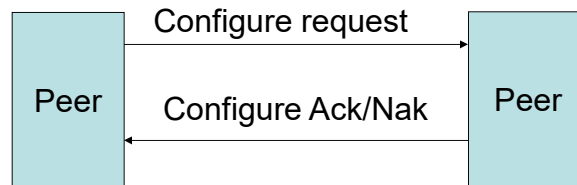
- The configure-request message is sent to request a link establishment and it contains the various options requested.
- This request is responded with a Configure-Ack if the negotiation is accepted.
- A Configure-Nak is sent if the negotiation is not acceptable and it suggests an acceptable negotiation.

73

Authentication

- Authentication Option uses Password Authentication Protocol (PAP) or Challenge Handshake Authentication Protocol (CHAP).
- The protocol used depends on negotiation.
- CHAP uses a one-way hashing algorithm which is known only to the user, to respond to a challenge sent by the authenticator.
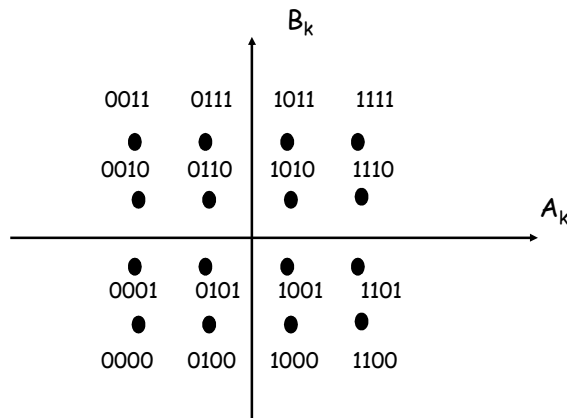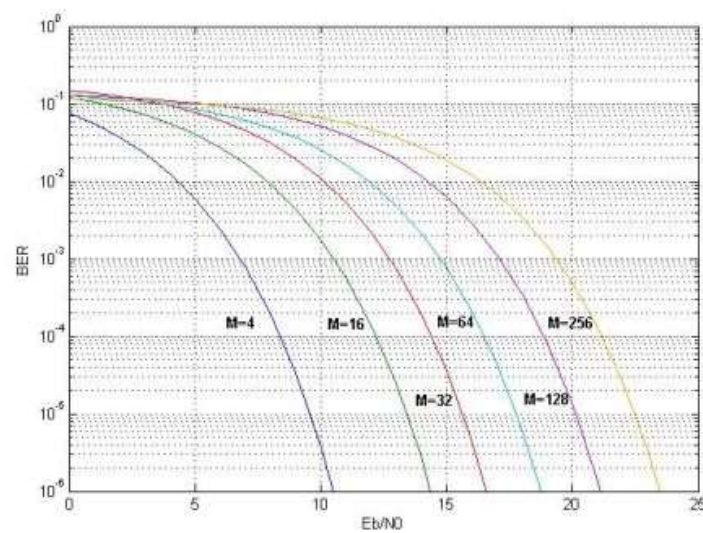- CHAP is more secure than PAP.

"username password"

accept/reject

PAP

challenge

response

accept/reject

CHAP

74

QAM constellation

- *16 QAM*

B_k

| 0011 | 0111 | 1011 | 1111 |

● ● ● ●

0010 0110 1010 1110

● ● ● ●

A_k

● ● ● ●

0001 0101 1001 1101

● ● ● ●

0000 0100 1000 1100

16 constellation symbols in T sec
(4 bit/symbol)

75

QAM

76