



CG X120

440–450W

 Mono Perc 10BB
 Monofacial / Bifacial


THE IDEAL SOLUTION FOR



Rooftop arrays on commercial and industrial buildings



Ground-mounted solar power plants

Contendre (CGPL) is one of the world's leading solar solution experts. We are specialised in high efficiency solar module manufacturing, distribution and research. To utilise our production and technology advantage, we provide our customers with comprehensive solutions for the whole life cycle of solar project.

We use Raw Materials certified by:



Made in India

Note: Specifications subject to technical changes and tests.
 Contendre reserves the right of final interpretation.



Multi Busbar Cell Technology

Shorter Distance Between Busbar
 Allows Better Flow of Electrons
 and Reduce Power Loss.



Cost Effective

Offering high value at low cost,
 makes it one of the popular choices
 of installers and customers



Lower BOS Costs

Designed for high voltage
 systems of upto 1500 VDC,
 saving balance of system costs



All-Weather Technology

Optimal yields, whatever the
 weather with excellent low-light
 and temperature behavior



Enduring High Performance

Long-term yield security with
 Anti LID and Anti PID Technology,
 Hot-Spot Protect and Traceable Quality



Load Capacity Enhancement

High durability raw materials
 helps to withstand high snow (5400 Pa)
 and wind loads (2400 Pa)



A Reliable Investment

12 years product warranty and
 25 years linear power output warranty
 makes it a reliable investment

MECHANICAL SPECIFICATION

Dimensions (LxWxH in mm)	1912x1133x40
Weight (kg)	23.96
No. of Cells	120 (10x6 / 10x6)
Aluminum Frame (40HS)	Silver Anodized Aluminum Alloy
Front Cover	Low Iron Tempered Glass (3.2 mm thick)
Encapsulate	Ethylene Vinyl Acetate (EVA) Sheet-free and UV resistant
Backsheet	Fluoro Polymer based PVDF Backsheet
Junction Box with 3-Bypass diode/Rating	Split Junction Box (IP68)–Weather proof / MC4 Compatible
Application Class Rating	Class A
Fire Safety Class Rating	Class II
Mechanical Load Test (as per IEC & UL)	5400 Pa–Front; 2400 Pa–Back
Mounting Holes Pitch (Y)–mm	(A) 1360, (B) 860, (C) 400
Mounting Holes Pitch (X)–mm	1095

ELECTRICAL PARAMETERS (STC*)

Model	Pmax	Vmp (V)	Imp (A)	Voc (V)	Isc (A)	Eff (%)
CG–X120–440	440W	34.47V	12.79V	40.81V	13.45A	20.37%
CG–X120–445	445W	34.75V	12.83V	40.96V	13.49A	20.60%
CG–X120–450	450W	35.06V	12.86V	41.18V	13.54A	20.84%

ELECTRICAL PARAMETERS (NMOT*)

Model	Pmax	Vmp (V)	Imp (A)	Voc (V)	Isc (A)
CG–X120–440	326W	31.74V	10.28A	38.39V	10.89A
CG–X120–445	330W	31.99V	10.31A	38.53V	10.93A
CG–X120–450	334W	32.28V	10.33A	38.73V	10.97A

Bifacial Output – Backside Power Gain @ STC*

(Note: The bifacial gain depends on the power plant design and site conditions.)

5%	Nominal Maximum Power (Pmax) Module Efficiency (%)	463W 21.37%	468W 21.61%	473W 21.85%
10%	Nominal Maximum Power (Pmax) Module Efficiency (%)	485W 22.39%	490W 22.64%	496W 22.89%
25%	Nominal Maximum Power (Pmax) Module Efficiency (%)	551W 25.44%	557W 25.73%	564W 26.02%

MAXIMUM OPERATING CONDITIONS

Operating Temperature	–40°C to +85°C
Maximum System Voltage	1500V
Maximum Series Fuse Rating	25A

TEMPERATURE COEFFICIENTS

Power (Pmax)	–0.278%/°C
Voltage (Voc)	–0.230%/°C
Current (Isc)	+0.05%/°C
NMOT / NOCT	44±2°C

OTHER X SERIES PRODUCTS

- CG–X144–XXX
- 535Wp – 550Wp


Caution: Please read safety and installation instructions

before using the product. ***Warranty:** Linear power warranty for 25 years, with degradation up to 2.5% in 1st year and 0.6%/year from year 2 to year 25.



Please read Contendresolar warranty documents thoroughly. **DISCLAIMER:**

specifications included in the datasheet are subject to change without prior notice owing to continuous innovation on the product Development and R&D Activities. Contendresolar reserves the right to make any adjustment to the information described here, Dataset contained in this specification do not form a representative of a single module data. ©T&C Apply.


PERFORMANCE WARRANTY

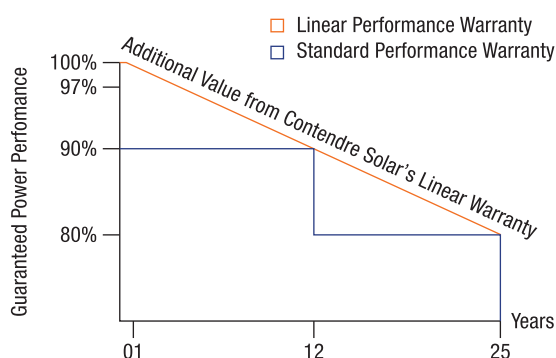

REFERENCE IV CURVE DETAIL

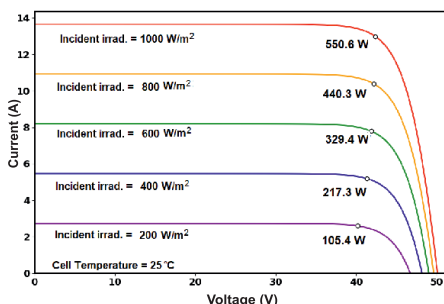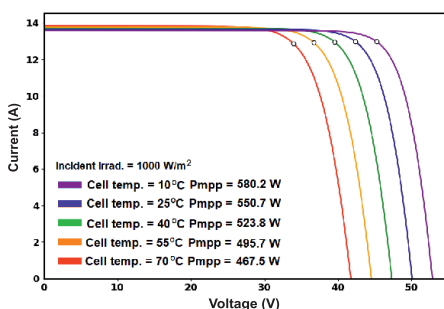

REAR VIEW & MOUNTING DETAIL

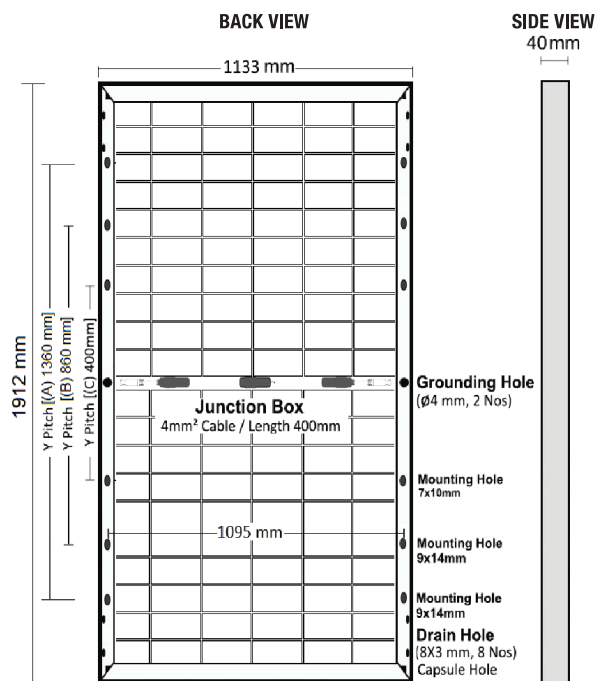

OFFICE: 909, Filix Tower, LBS Road, Bhandup (W), Mumbai, MH–400078. INDIA

FACTORY: Unit i/6, Rajlaxshmi Hi–Tech Park, Sonale Village, Bhiwandi, Maharashtra–421302. INDIA