



CONTENDRE
SOLAR

X SERIES



CG X144

535–550W

144 Cut Cells Module
Max Efficiency Combined
With Max Power



THE IDEAL SOLUTION FOR



Rooftop arrays on commercial and industrial buildings



Ground-mounted solar power plants

Contendre (CGPL) is one of the world's leading solar solution experts. We are specialised in high efficiency solar module manufacturing, distribution and research. To utilise our production and technology advantage, we provide our customers with comprehensive solutions for the whole life cycle of solar project.

We use Raw Materials certified by:



Made in India

Note: Specifications subject to technical changes and tests.
Contendre reserves the right of final interpretation.



Multi Busbar Cell Technology

Shorter Distance Between Busbar
Allows Better Flow of Electrons
and Reduce Power Loss.



Cost Effective

Offering high value at low cost,
makes it one of the popular choices
of installers and customers



Lower BOS Costs

Designed for high voltage
systems of upto 1500 VDC,
saving balance of system costs



All-Weather Technology

Optimal yields, whatever the
weather with excellent low-light
and temperature behavior



Enduring High Performance

Long-term yield security with
Anti LID and Anti PID Technology,
Hot-Spot Protect and Traceable Quality



Load Capacity Enhancement

High durability raw materials
helps to withstand high snow (5400 Pa)
and wind loads (2400 Pa)



A Reliable Investment

12 years product warranty and
25 years linear power output warranty
makes it a reliable investment

MECHANICAL SPECIFICATION

Dimensions (LxWxH in mm)	2261x1134x35/40 mm
Weight (kg)	28.5
No. of Cells	144 (12x6 / 12x6)
Aluminum Frame (40HS)	Silver Anodized Aluminum Alloy
Front Cover	Low Iron Tempered Glass (3.2 mm thick)
Encapsulate	Ethylene Vinyl Acetate (EVA) Sheet-free and UV resistant
Backsheet	Fluoro Polymer based PVDF Backsheet
Junction Box with 3-Bypass diode/Rating	Split Junction Box (IP68)—Weather proof / MC4 Compatible
Application Class Rating	Class A
Fire Safety Class Rating	Class II
Mechanical Load Test (as per IEC & UL)	5400 Pa—Front; 2400 Pa—Back
Mounting Holes Pitch (Y)—mm (A) 1400, (B) 400	
Mounting Holes Pitch (X)—mm 1095	

ELECTRICAL PARAMETERS (STC*)

Model	Vol (V)	Vmp (V)	Imp (A)	Isc (A)	Pmax (A)	Eff (%)
CG-X144-550	49.35	42.60	12.95	13.90	550	21.50
CG-X144-545	49.32	42.55	12.85	13.80	545	21.30
CG-X144-540	49.29	42.50	12.75	13.65	540	21.10
CG-X144-535	49.25	42.48	12.60	13.50	535	20.90
CG-X144-530	49.23	42.40	12.50	13.45	530	20.70

*STC (Standard Test Conditions): Irradiance 1000 W/m², Temperature 25°C, Spectrum at AM 1.5G.

ELECTRICAL PARAMETERS (NMOT*)

Model	Voc (V)	Vmp (V)	Imp (A)	Isc (A)	Pmax (A)	Eff (%)
CG-X144-550	44.88	38.41	10.40	11.16	400	19.50
CG-X144-545	44.85	38.36	10.32	11.08	396	19.35
CG-X144-540	44.83	38.32	10.24	10.96	393	19.15
CG-X144-535	44.79	38.30	10.12	10.84	388	19.00
CG-X144-530	44.77	38.23	10.04	10.80	384	18.80

*NMOT (Nominal Module Operating Temperature): Irradiance 800W/m², Ambient Temperature 20°C, Spectrum at AM 1.5G, Wind Speed at 1m/s. (NOCT is similar to NMOT)

MAXIMUM OPERATING CONDITIONS

Operating Temperature	-40°C to +85°C
Maximum System Voltage	1500V
Maximum Series Fuse Rating	25A

TEMPERATURE COEFFICIENTS

Power (Pmax)	-0.278%/°C
Voltage (Voc)	-0.230%/°C
Current (Isc)	+0.05%/°C
NMOT / NOCT	44±2°C

OTHER X SERIES PRODUCTS

- CG-X120-XXX
- 440Wp – 450Wp


Caution: Please read safety and installation instructions

before using the product. ***Warranty:** Linear power warranty for 25 years, with degradation up to 2.5% in 1st year and 0.6%/year from year 2 to year 25.



Please read Contendresolar warranty documents thoroughly. **DISCLAIMER:** specifications included in the datasheet are subject to change without prior notice owing to continuous innovation on the product Development and R&D Activities. Contendresolar reserves the right to make any adjustment to the information described here, Dataset contained in this specification do not form a representative of a single module data. ©T&C Apply.

+91 91364 57555 www.contendresolar.com


PERFORMANCE WARRANTY

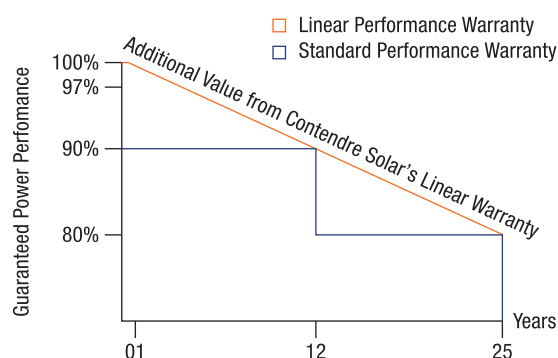

REFERENCE IV CURVE DETAIL

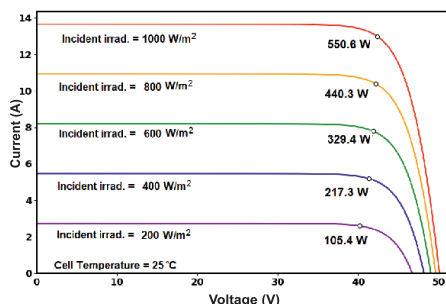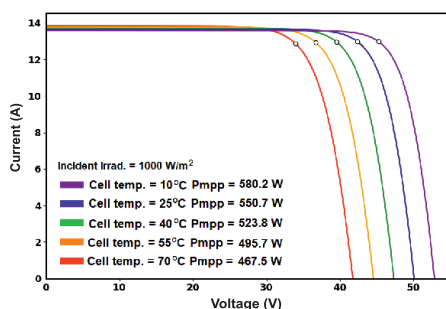

REAR VIEW & MOUNTING DETAIL

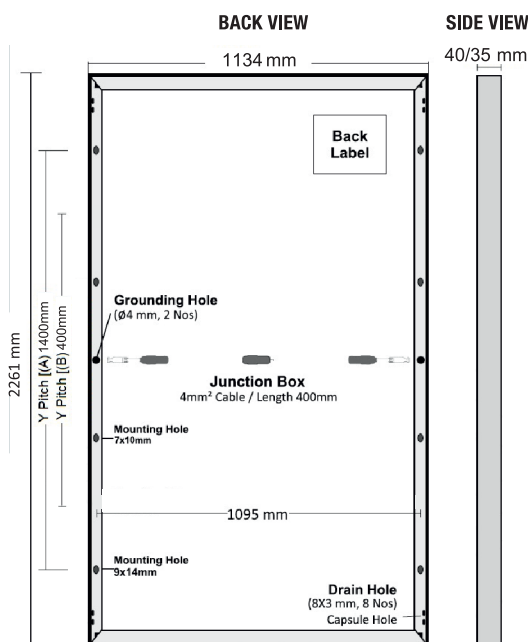

OFFICE: 909, Filix Tower, LBS Road, Bhandup (W), Mumbai, MH-400078. INDIA

FACTORY: Unit i/6, Rajlaxshmi Hi-Tech Park, Sonale Village, Bhiwandi, Maharashtra-421302. INDIA