

ERYON G12R N-Type TOPCon

Higher efficiency, minimal degradation, and excellent long-term performance.



Bifacial Power Gain

Rear-side generation boosts overall energy yield in varied installations.



Large G12R Wafer Format

Maximized power per module and reduced BOS costs.



Superior Low-Light Performance

More generation during mornings, evenings, and cloudy conditions.



Excellent Temperature Coefficient

Stable and higher output even in hot climates.



Double-Glass Durability

Enhanced resistance to moisture, UV, and mechanical stresses.



Reduced LID & LeTID

Low initial degradation ensures reliable energy over lifetime.



Extended Warranty

Up to 30 years of performance warranty for peace of mind.



Certified for Harsh Environments

Tested against wind, snow, salt mist, and ammonia exposure.

Up to **23.88%** Module Efficiency

Delivering more power per m² with advanced N-Type TOPCon technology

Tailored for Every Need



For Developers:

Maximize MW per acre with higher power density



For Investors:

Future-proof returns backed by strong warranties



For Businesses & Rooftops:


Durable, aesthetic, and reliable in diverse climates

System Certificates[^]

IEC 61215:2021, IEC 61730, UL 61215, UL 61730, IS 14286, IS/IEC 61730, IEC 61701, IEC 62716, IEC 60068-2-68, CAN-CSA

[^]All certifications under progress.

POWER WARRANTY

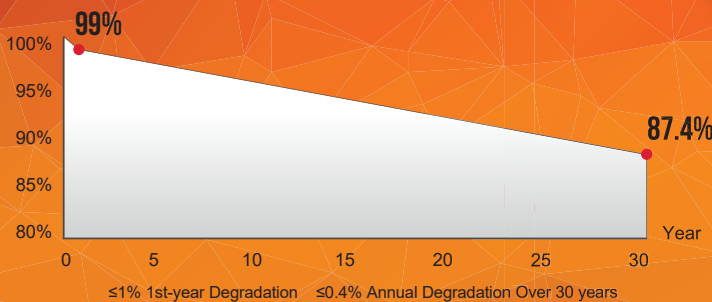


Contendre is a leading manufacturer of high-efficiency solar PV modules, committed to delivering reliable, sustainable, and future-ready energy solutions. With advanced technology, stringent quality standards, and long-term performance assurance, we empower projects worldwide to achieve lower LCOE and higher returns.

ERYON G12R N-Type TOPCon

MECHANICAL DATA

Parameter	Specification
Length × Width × Height	2382 × 1134 × 30 mm (93.77 × 44.64 × 1.18 inches)
Weight	39 Kg (85.98 lbs)
Junction Box	IP 68, Split Junction Box with individual bypass diodes
Cable & Connectors#	300 mm (+ve terminal) and 300 mm (-ve terminal) length cables, MC4 Compatible / Staubli EVO connectors
Application Class	Class A (Safety class II)
Superstrate##	2.0 mm (0.098 inches) high transmission ARC Semi-tempered glass (low iron content)
Cells	66 (132 half-cells) N-TYPE bifacial solar cells
Substrate	2.0 mm (0.098 inches) high transmission heat strengthened glass / mesh glass## (low iron content)
Frame	Anodized aluminium
Mechanical Load Test	5400 Pa (Snow load), 2400 Pa (Wind load)
Cell Encapsulant	EPE / EPE
Maximum Series Fuse Rating	30 A
Hail Test	Ø 40 mm

##Anti-glare Glass is also available ! *As per applicable product ! Additional cost & lead time subject to availability.

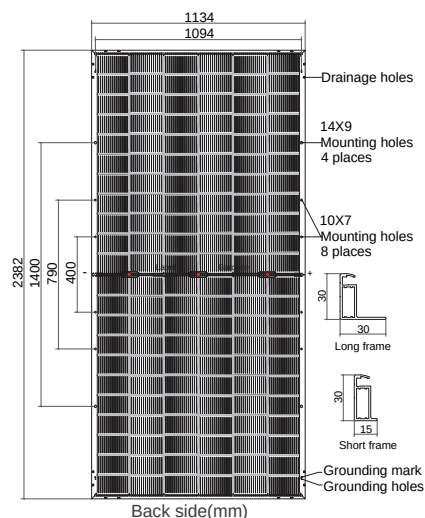

Electrical Specifications¹

Module Type	CG-EN132610		CG-EN132615		CG-EN132620		CG-EN132625		CG-EN132630		CG-EN132635		CG-EN132640		CG-EN132645	
Testing Condition	STC ²	NOCT ³	STC ²	NOCT ³	STC ²	NOCT ³	STC ²	NOCT ³	STC ²	NOCT ³	STC ²	NOCT ³	STC ²	NOCT ³	STC ²	NOCT ³
Maximum Power (P _{max} /W)	610	461	615	465	620	468	625	472	630	476	635	480	640	483	645	487
Maximum Power Current (I _{mp} /A)	14.8	11.59	14.85	11.64	14.93	11.68	14.98	11.72	15.05	11.79	15.08	11.87	15.12	11.92	15.15	12.00
Maximum Power Voltage (V _{mp} /V)	41.71	39.76	41.91	39.95	42.04	40.07	42.24	40.26	42.37	40.39	42.44	40.45	42.5	40.51	42.57	40.58
Short-circuit Current (I _{sc} /A)	15.75	12.71	15.76	12.72	15.77	12.73	15.79	12.74	15.83	12.77	15.85	12.79	15.86	12.8	15.89	12.82
Open-circuit Voltage (V _{oc} /V)	47.45	45.23	47.72	45.49	47.98	45.73	48.18	45.93	48.31	46.05	48.38	46.12	48.51	46.24	48.58	46.31
Module Efficiency STC (%)	22.58%		22.77%		22.95%		23.14%		23.32%		23.51%		23.69%		23.88%	

¹ Measurements according to IEC 60904-3, Measurement tolerance: I_{sc}: ±4%, V_{oc}: ±3%, Test uncertainty for P_{max}: ±3%, Bifaciality: 80%±5%

² STC (Standard Test Condition): Radiation 1000W/m², Module temperature 25°C, AM=1.5

³ NMOT: Radiation 800W/m², Ambient temperature 20°C, AM=1.5, Wind Speed 1m/s

Electrical Specifications¹(BNPI²)

Maximum Power (P _{max} /W)	677	682	688	693	699	701	704	707
Maximum Power Current (I _{mp} /A)	16.23	16.27	16.37	16.41	16.50	16.52	16.56	16.61
Maximum Power Voltage (V _{mp} /V)	41.71	41.91	42.04	42.24	42.37	42.44	42.50	42.57
Short-circuit Current (I _{sc} /A)	18.02	18.04	18.05	18.07	18.12	18.14	18.15	18.18
Open-circuit Voltage (V _{oc} /V)	47.45	47.72	47.98	48.18	48.31	48.38	48.51	48.58

¹ Measurements according to IEC 60904-3, Measurement tolerance: I_{sc}: ±4%, V_{oc}: ±3%, Test uncertainty for P_{max}: ±3%

² BNPI: Front radiation 1000W/m², Rear radiation 135W/m², Module temperature 25°C, AM=1.5

Temperature Coefficients (T_c)



Nominal Operating Cell Temperature	43°C ± 2°C
T _c Current	0.046 % / °C
T _c Voltage	-0.25 % / °C
T _c Power	-0.31 % / °C

Packaging

Vertical type	40' HQ	19' Open Truck	24' Open Truck
Pallet Dimensions (mm)	2396 × 1134 × 1250	2396 × 950 × 1250	2396 × 950 × 1250
Pieces per Pallet	36	8	12
Pieces per Container	720	240	360

Operating Conditions

Operating Temperature (°C)	-40 to +85
Maximum System Voltage (V)	1500 DC(IEC)
Overcurrent Protection Rating (A)	30
Power Output Tolerance (%)	0~3
Protection Class	Class II
Max. Test Load, Push/Pull (Pa)	Front 5400 / Back 2400
Max. Design Load, Push/Pull (Pa)	Front 3600 / Back 1600

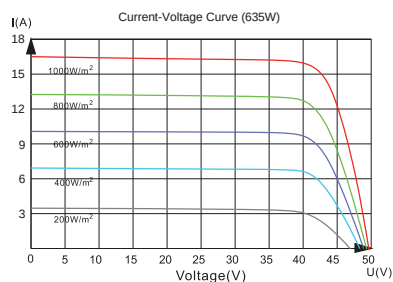

OFFICE: 909, Filix Tower, LBS Road, Bhandup (W), Mumbai, MH-400078. INDIA

FACTORY: Survey No. 350/351, Wada-Bhiwandi Road, Opp. Amantran Hotel, Musarne Village, Palghar, Maharashtra

Statement: Read the safety and installation manual before use. Specifications may change without notice; Electrical data is indicative only and does not constitute a guarantee. Confirm your requirements with an authorized Contendpre representative while placing an order. Contendpre Solar and all its accompanying logos are trademarks of Contendpre Greenery Limited.