

G Series

CG G60
305-325W


CG G72
365-385W

GLASS-GLASS SOLAR MODULES
NEXT GEN SOLAR MODULES
WITH GLASS BACK DESIGN

60 / 72 Cells

 **CONTENDRE**
YIELD SECURITY

- ANTI PID TECHNOLOGY (APT)
- HOT-SPOT PROTECT (HSP)
- TRACEABLE QUALITY (TRA.Q)
- ANTILID TECHNOLOGY (ALT)

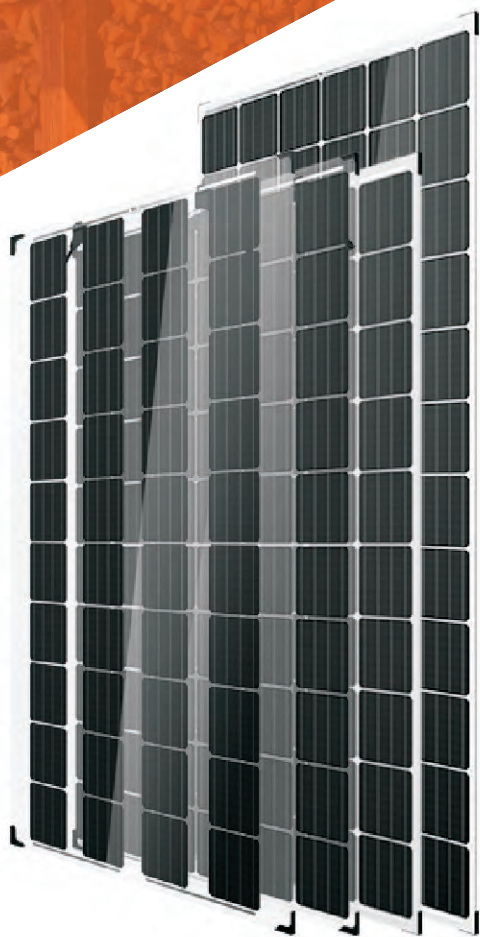

5 BUSBAR SOLAR CELL

Advanced 5 busbar Cell technology for higher efficiency and better aesthetics



LOW MAINTENANCE

Reduced soiling and snow coverage requires less maintenance and enhances fire safety



IMPROVED DURABILITY

Dual glass reduces micro-cracking, snail trails, corrosion caused by moisture, salt mist, acid, alkali, sand, etc.



ALL-WEATHER TECHNOLOGY

Optimal yields, whatever the weather with excellent low-light and temperature behavior



AESTHETICALLY PLEASING DESIGN

Frame less design, Light permeability and it's transparency makes it aesthetically soothing.



ENDURING HIGH PERFORMANCE

Long-term yield security with Anti LID and Anti PID Technology, Hot-Spot Protect and Traceable Quality



HIGHER LIFETIME POWER YIELD

Superior Linear Power output warranty of 30 years with lower rate of degradation than standard modules

THE IDEAL SOLUTION FOR:



Building integrated solar solution



Ground-mounted, floating solar power plants

We use Raw Materials certified by:



Made in India

IEC, BIS, MNRE certifications for Solar Modules under process.


Note: Specifications subject to technical changes and tests. Contendre reserves the right of final interpretation.



MECHANICAL SPECIFICATION

Mono Perc Cell	6 x 10 (60)	6 x 12 (72)
Format	1645 x 985 x 40 mm	1968 x 990 x 40 mm
Weight	24 kg	28 kg
Front Cover	3.2 mm tempered glass with anti reflection technology	
Back Cover	Low Iron ARC Tempered Glass	
Frame	Frameless Design	
Junction Box	IP 67 / IP 68 rated Split Junction Box	
Cable	1000mm/1200mm Long, 4mm ² cables	
Connector	MC4 compatible connectors	

PERFORMANCE WARRANTY

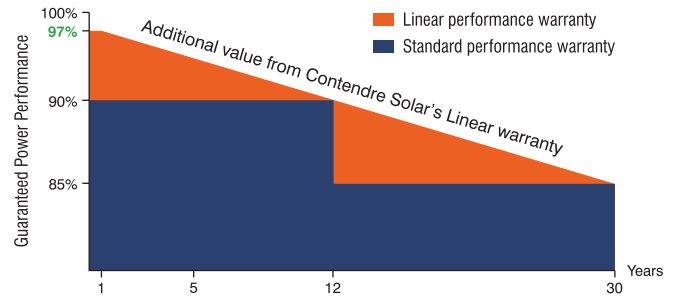

ELECTRICAL PARAMETERS


G-SERIES		60 Cells						72 Cells			
		305	310	315	320	325	365	370	375	380	385
MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC (POWER TOLERANCE +5W/-0W)											
Power at MPP	P _{VPP} [W]	305	310	315	320	325	365	370	375	380	385
Short Circuit Current	I _{SC} [A]	9.94	10.01	10.06	10.10	10.13	9.94	10.01	10.06	10.10	10.13
Open Circuit Voltage	V _{OC} [V]	39.60	40.38	40.56	40.72	40.86	47.52	48.46	48.67	48.86	49.03
Current at MPP	I _{MPP} [A]	9.50	9.60	9.70	9.79	9.85	9.50	9.60	9.70	9.79	9.85
Voltage at MPP	V _{VPP} [V]	33.41	33.56	33.65	33.83	33.93	40.09	40.28	40.38	40.60	40.71
Efficiency	n [%]	18.82	19.13	19.44	19.75	20.06	18.83	19.09	19.35	19.60	19.86
Fill Factor		79.64	79.71	79.99	80.53	80.74	79.64	79.71	79.99	80.53	80.74

Electrical values measured at STC: 25 °C, 1.5AM, 1000 W/m²

MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NOCT											
Power at MPP	P _{VPP} [W]	239.28	243.52	247.27	251.50	254.15	292.14	297.29	301.85	306.98	310.20
Short Circuit Current	I _{SC} [A]	8.31	8.38	8.43	8.47	8.50	8.31	8.38	8.43	8.47	8.50
Open Circuit Voltage	V _{OC} [V]	36.36	37.14	37.32	37.48	37.62	44.28	45.22	45.43	45.62	45.79
Current at MPP	I _{MPP} [A]	7.91	8.01	8.11	8.20	8.26	7.91	8.01	8.11	8.20	8.26
Voltage at MPP	V _{VPP} [V]	30.25	30.40	30.49	30.67	30.77	36.93	37.12	37.22	37.44	37.55

Measurement tolerance, AM 1.5G, NOCT (Wp) at 45 ± 2 °C @800 W/m²

CONTENDRE MODULE DIMENSION DIAGRAM

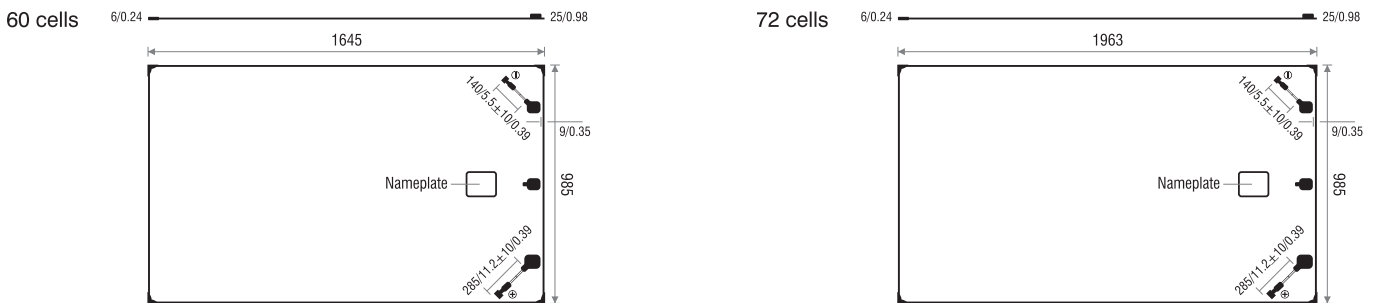

TEMPERATURE COEFFICIENTS

Temperature Coefficient of I _{SC}	a	[%/C]	+0.0544	Temperature Coefficient of V _{OC}	b	[%/C]	-0.311
Temperature Coefficient of P _{MPP}	y	[%/C]	-0.3866	Normal Module Operating Temperature	NMCT	[°C]	45 ± 2 °C

PROPERTIES FOR SYSTEM DESIGN

Maximum System Voltage V _{sys}	[v]	1500 (IEC)	Safety Class	II
Maximum Series Fuse Rating	[A DC]	20	Fire Rating	C
Max. Design Load, Push / Pull	[lbs / ft ²]	2400 Pa	Temperature Degree Celsius	-40°C up to +85°C
Max. Test Load, Push / Pull	[lbs / ft ²]	5400 Pa		

QUALIFICATION AND CERTIFICATES

UL 1703, CE-compliant.
IEC 61215:2016, IEC 61730:2016, Application Class II



All certifications under process.

PACKAGING DETAILS

	60 Cells	72 Cells
Number of Modules per Pallet	28	25
Number of Pallets per 53' Troller	30	24
Number of Pallets per 40' HC-Container	28	22
1-Pallet Dimensions (L x W x H)	1665 x 1040 x 1190 mm	1980 x 1040 x 1190 mm
1-Pallet Weight	600.00 kg	705.00 kg

Note: Installation instructions must be followed. See the installation and operating manual or contact our technical service department for further information on approved installation and use of this product.

Specifications subject to technical changes. ©CONTENDRE

CONTENDRE GREENERGY PVT. LTD.
102, 1st Floor, Vikas Paradise, LBS Marg, Mulund (West), Mumbai - 400080. India.
TEL: +91-8928731268 **EMAIL:** info@contendresolar.com **WEB:** www.contendresolar.com

Made in India



M Series

CG M60
305-325W


CG M72
365-385W

MONOCRYSTALLINE SOLAR MODULE
HIGH EFFICIENCY MONO-PERC
CELL TECHNOLOGY

60 / 72 Cells

 **CONTENDRE**
YIELD SECURITY

- ANTI PID TECHNOLOGY (APT)
- HOT-SPOT PROTECT (HSP)
- TRACEABLE QUALITY (TRA.Q)
- ANTILID TECHNOLOGY (ALT)

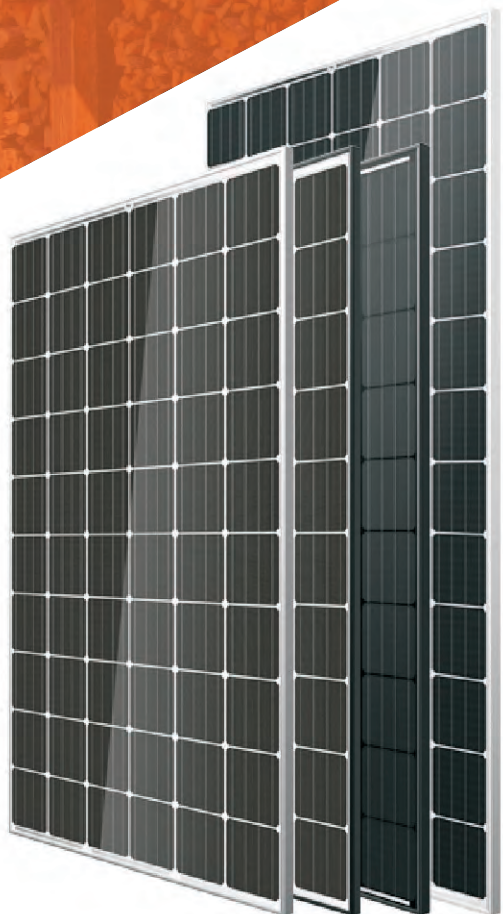

5 BUSBAR SOLAR CELL

Advanced 5 busbar Cell technology for higher efficiency and better aesthetics



COST EFFECTIVE

Offering high value at low cost, makes it one of the popular choices of installers and customers



LOWER BOS COSTS

Designed for high voltage systems of upto 1500 VDC, saving balance of system costs



ALL-WEATHER TECHNOLOGY

Optimal yields, whatever the weather with excellent low-light and temperature behavior



ENDURING HIGH PERFORMANCE

Long-term yield security with Anti LID and Anti PID Technology, Hot-Spot Protect and Traceable Quality



LOAD CAPACITY ENHANCEMENT

High durability raw materials helps to withstand high snow (5400 Pa) and wind loads (2400 Pa)



A RELIABLE INVESTMENT

10 years product warranty and 25 years linear power output warranty makes it a reliable investment

Contendre (CGPL) is one of the world's leading solar solution experts. We are specialised in high efficiency solar module manufacturing, distribution and research. To utilise our production and technology advantage, we provide our customers with comprehensive solutions for the whole life cycle of solar project.

THE IDEAL SOLUTION FOR:



Rooftop arrays on commercial and industrial buildings



Ground-mounted solar power plants

We use Raw Materials certified by:



Made in India

IEC, BIS, MNRE certifications for Solar Modules under process.


Note: Specifications subject to technical changes and tests. Contendre reserves the right of final interpretation.



MECHANICAL SPECIFICATION

Mono Perc Cell	6 x 10 (60)	6 x 12 (72)
Format	1650 x 990 x 40 mm (including Frame)	1968 x 990 x 40 mm (including Frame)
Weight	20 kg	24 kg
Front Cover	3.2 mm tempered glass with anti reflection technology	
Back Cover	Floro Polymer based Backsheet	
Frame	More than 15 micron Anodized Aluminium	
Junction Box	TUV & UL approved, IP 67 / IP 68 rated 4 terminal Junction box with 3 bypass diodes	
Cable	1200mm Long, 4mm ² cables	
Connector	MC4 compatible connectors	

PERFORMANCE WARRANTY

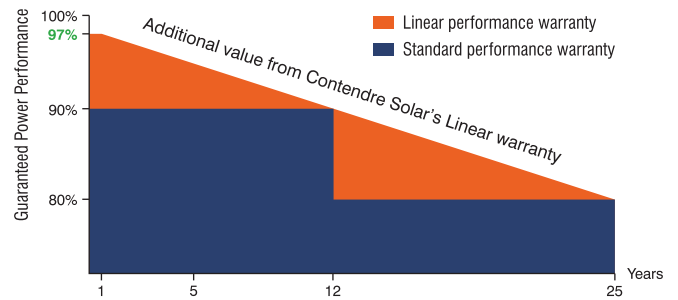

ELECTRICAL PARAMETERS



M-SERIES		60 Cells						72 Cells			
		305	310	315	320	325	365	370	375	380	385
MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC (POWER TOLERANCE +5W/-0W)											
Power at MPP	P _{VPP} [W]	305	310	315	320	325	365	370	375	380	385
Short Circuit Current	I _{SC} [A]	9.94	10.01	10.06	10.10	10.13	9.94	10.01	10.06	10.10	10.13
Open Circuit Voltage	V _{OC} [V]	39.60	40.38	40.56	40.72	40.86	47.52	48.46	48.67	48.86	49.03
Current at MPP	I _{MPP} [A]	9.50	9.60	9.70	9.79	9.85	9.50	9.60	9.70	9.79	9.85
Voltage at MPP	V _{VPP} [V]	33.41	33.56	33.65	33.83	33.93	40.09	40.28	40.38	40.60	40.71
Efficiency	n [%]	18.82	19.13	19.44	19.75	20.06	18.83	19.09	19.35	19.60	19.86
Fill Factor		79.64	79.71	79.99	80.53	80.74	79.64	79.71	79.99	80.53	80.74

Electrical values measured at STC: 25 °C, 1.5AM, 1000 W/m²

MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NOCT											
Power at MPP	P _{VPP} [W]	239.28	243.52	247.27	251.50	254.15	292.14	297.29	301.85	306.98	310.20
Short Circuit Current	I _{SC} [A]	8.31	8.38	8.43	8.47	8.50	8.31	8.38	8.43	8.47	8.50
Open Circuit Voltage	V _{OC} [V]	36.36	37.14	37.32	37.48	37.62	44.28	45.22	45.43	45.62	45.79
Current at MPP	I _{MPP} [A]	7.91	8.01	8.11	8.20	8.26	7.91	8.01	8.11	8.20	8.26
Voltage at MPP	V _{VPP} [V]	30.25	30.40	30.49	30.67	30.77	36.93	37.12	37.22	37.44	37.55

Measurement tolerance, AM 1.5G, NOCT (Wp) at 45 ± 2 °C @800 W/m²

CONTENDRE MODULE DIMENSION DIAGRAM

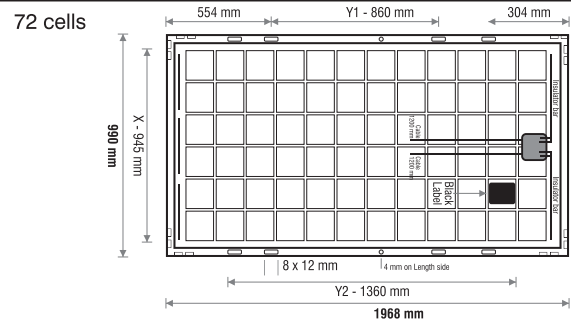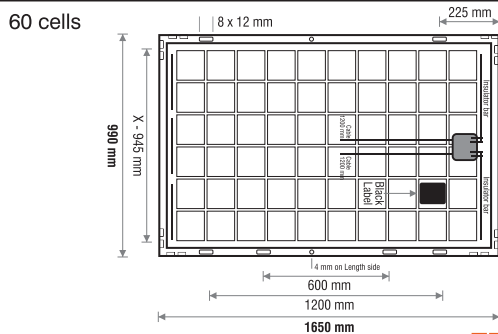

TEMPERATURE COEFFICIENTS

Temperature Coefficient of I _{SC}	a	[%/C]	+0.0544	Temperature Coefficient of V _{OC}	b	[%/C]	-0.311
Temperature Coefficient of P _{MPP}	y	[%/C]	-0.3866	Normal Module Operating Temperature	NMCT	[°C]	45 ± 2 °C

PROPERTIES FOR SYSTEM DESIGN

Maximum System Voltage V _{sys}	[v]	1500 (IEC)	Safety Class	II
Maximum Series Fuse Rating	[A DC]	20	Fire Rating	C
Max. Design Load, Push / Pull	[lbs / ft ²]	2400 Pa	Temperature Degree Celsius	-40°C up to +85°C
Max. Test Load, Push / Pull	[lbs / ft ²]	5400 Pa		

QUALIFICATION AND CERTIFICATES

UL 1703, CE-compliant.
IEC 61215:2016, IEC 61730:2016, Application Class II



All certifications under process.

PACKAGING DETAILS

	60 Cells	72 Cells
Number of Modules per Pallet	28	25
Number of Pallets per 53' Troller	30	24
Number of Pallets per 40' HC-Container	28	22
1-Pallet Dimensions (L x W x H)	1665 x 1040 x 1190 mm	1980 x 1040 x 1190 mm
1-Pallet Weight	600.00 kg	705.00 kg

Note: Installation instructions must be followed. See the installation and operating manual or contact our technical service department for further information on approved installation and use of this product.

Specifications subject to technical changes. ©CONTENDRE

CONTENDRE GREENERGY PVT. LTD.

102, 1st Floor, Vikas Paradise, LBS Marg, Mulund (West), Mumbai - 400080. India.

TEL: +91-8928731268 EMAIL: info@contendresolar.com WEB: www.contendresolar.com

Made in India



P Series

#TimelessTech

CG P72 325-335W

MULTICRYSTALLINE SOLAR PV MODULE

72 Cells



YIELD SECURITY

- ANTI PID TECHNOLOGY
- HOT-SPOT PROTECT
- TRACEABLE QUALITY
- ANTILID TECHNOLOGY



5 BUSBAR SOLAR CELL

Advanced 5 busbar Cell technology for higher efficiency and better aesthetics



COST EFFECTIVE

Offering high value at low cost, makes it one of the popular choices of installers and customers



LOWER BOS COSTS

Designed for high voltage systems of upto 1500 VDC, saving balance of system costs



ALL-WEATHER TECHNOLOGY

Optimal yields, whatever the weather with excellent low-light and temperature behavior



ENDURING HIGH PERFORMANCE

Long-term yield security with Anti LID and Anti PID Technology, Hot-Spot Protect and Traceable Quality



LOAD CAPACITY ENHANCEMENT

High durability raw materials helps to withstand high snow (5400 Pa) and wind loads (2400 Pa)



A RELIABLE INVESTMENT

10 years product warranty and 25 years linear power output warranty makes it a reliable investment

Contendre (CGPL) is one of the world's leading solar solution experts. We are specialised in high efficiency solar module manufacturing, distribution and research. To utilise our production and technology advantage, we provide our customers with comprehensive solutions for the whole life cycle of solar project.

THE IDEAL SOLUTION FOR:



Rooftop arrays on small residential, commercial and industrial buildings



Ground-mounted solar power plants

We use Raw Materials certified by:



Made in India

Note: Specifications subject to technical changes and tests. Contendre reserves the right of final interpretation.




CONTENDRE

PERFORMANCE WARRANTY

Years	Standard Performance Warranty (%)	Linear Performance Warranty (%)
1	97.5	97.5
12	90.0	90.0
25	80.0	80.0

P-SERIES			72 Cells		
			325	330	335
ELECTRICAL PARAMETERS					
Power at MPP	P _{MPP}	[W]	325	330	335
Short Circuit Current	I _{SC}	[A]	9.02	9.05	9.14
Open Circuit Voltage	V _{OC}	[V]	45.10	46.15	46.37
Current at MPP	I _{MPP}	[A]	8.48	8.48	8.54
Voltage at MPP	V _{MPP}	[V]	38.22	38.95	39.24
Efficiency	n	[%]	16.79%	17.05%	17.31%
Fill Factor	FF		79.67	79.08	79.07
Electrical values measured at STC: 25 °C, 1.5AM, 1000 W/m²					
MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NOCT					
Power at MPP	P _{MPP}	[W]	240.54	245.14	248.71
Short Circuit Current	I _{SC}	[A]	7.28	7.31	7.38
Open Circuit Voltage	V _{OC}	[V]	42.35	43.34	43.55
Current at MPP	I _{MPP}	[A]	6.72	6.72	6.77
Voltage at MPP	V _{MPP}	[V]	35.89	36.58	36.85
Measurement tolerance, AM 1.5G, NOCT (Wp) at 45 ±2 °C @800 W/m2					

TEMPERATURE COEFFICIENTS

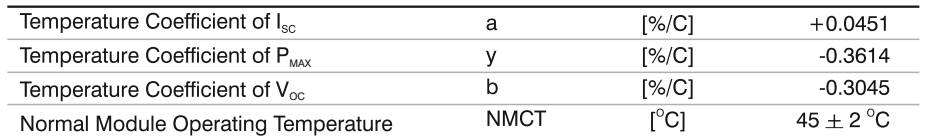

Maximum System Voltage V _{sys}	[V]	1500 (IEC)
Maximum Series Fuse Rating	[A DC]	20
Max. Design Load, Push / Pull	[lbs / ft²]	2400 Pa
Max. Test Load, Push / Pull	[lbs / ft²]	5400 Pa
Safety Class		II
Fire Rating		C
Temperature Degree Celsius		-40°C up to +85°C

Number of Modules per Pallet	30
Number of Pallets per 40' HC-Container	20
Number of Modules per 40' HC-Container	600
1-Pallet Weight	640.00 kg

UL 1703, CE-compliant.
IEC 61215:2016, IEC 61730:2016, Application Class II.
ISO 9001:2015, ISO 14001:2015, ISO 45001:2018.



Made in India





CG X120

440–450W

 Mono Perc 10BB
 Monofacial / Bifacial


THE IDEAL SOLUTION FOR



Rooftop arrays on commercial and industrial buildings



Ground-mounted solar power plants

Contendre (CGPL) is one of the world's leading solar solution experts. We are specialised in high efficiency solar module manufacturing, distribution and research. To utilise our production and technology advantage, we provide our customers with comprehensive solutions for the whole life cycle of solar project.

We use Raw Materials certified by:



Made in India

Note: Specifications subject to technical changes and tests.
 Contendre reserves the right of final interpretation.



Multi Busbar Cell Technology

Shorter Distance Between Busbar
 Allows Better Flow of Electrons
 and Reduce Power Loss.



Cost Effective

Offering high value at low cost,
 makes it one of the popular choices
 of installers and customers



Lower BOS Costs

Designed for high voltage
 systems of upto 1500 VDC,
 saving balance of system costs



All-Weather Technology

Optimal yields, whatever the
 weather with excellent low-light
 and temperature behavior



Enduring High Performance

Long-term yield security with
 Anti LID and Anti PID Technology,
 Hot-Spot Protect and Traceable Quality



Load Capacity Enhancement

High durability raw materials
 helps to withstand high snow (5400 Pa)
 and wind loads (2400 Pa)



A Reliable Investment

12 years product warranty and
 25 years linear power output warranty
 makes it a reliable investment

MECHANICAL SPECIFICATION

Dimensions (LxWxH in mm)	1912x1133x40
Weight (kg)	23.96
No. of Cells	120 (10x6 / 10x6)
Aluminum Frame (40HS)	Silver Anodized Aluminum Alloy
Front Cover	Low Iron Tempered Glass (3.2 mm thick)
Encapsulate	Ethylene Vinyl Acetate (EVA) Sheet-free and UV resistant
Backsheet	Fluoro Polymer based PVDF Backsheet
Junction Box with 3-Bypass diode/Rating	Split Junction Box (IP68)–Weather proof / MC4 Compatible
Application Class Rating	Class A
Fire Safety Class Rating	Class II
Mechanical Load Test (as per IEC & UL)	5400 Pa–Front; 2400 Pa–Back
Mounting Holes Pitch (Y)–mm	(A) 1360, (B) 860, (C) 400
Mounting Holes Pitch (X)–mm	1095

ELECTRICAL PARAMETERS (STC*)

Model	Pmax	Vmp (V)	Imp (A)	Voc (V)	Isc (A)	Eff (%)
CG-X120-440	440W	34.47V	12.79V	40.81V	13.45A	20.37%
CG-X120-445	445W	34.75V	12.83V	40.96V	13.49A	20.60%
CG-X120-450	450W	35.06V	12.86V	41.18V	13.54A	20.84%

ELECTRICAL PARAMETERS (NMOT*)

Model	Pmax	Vmp (V)	Imp (A)	Voc (V)	Isc (A)
CG-X120-440	326W	31.74V	10.28A	38.39V	10.89A
CG-X120-445	330W	31.99V	10.31A	38.53V	10.93A
CG-X120-450	334W	32.28V	10.33A	38.73V	10.97A

Bifacial Output – Backside Power Gain @ STC*

(Note: The bifacial gain depends on the power plant design and site conditions.)

5%	Nominal Maximum Power (Pmax) Module Efficiency (%)	463W 21.37%	468W 21.61%	473W 21.85%
10%	Nominal Maximum Power (Pmax) Module Efficiency (%)	485W 22.39%	490W 22.64%	496W 22.89%
25%	Nominal Maximum Power (Pmax) Module Efficiency (%)	551W 25.44%	557W 25.73%	564W 26.02%

MAXIMUM OPERATING CONDITIONS

Operating Temperature	–40°C to +85°C
Maximum System Voltage	1500V
Maximum Series Fuse Rating	25A

TEMPERATURE COEFFICIENTS

Power (Pmax)	–0.278%/°C
Voltage (Voc)	–0.230%/°C
Current (Isc)	+0.05%/°C
NMOT / NOCT	44±2°C

OTHER X SERIES PRODUCTS

- CG-X144-XXX
- 535Wp – 550Wp


Caution: Please read safety and installation instructions

before using the product. ***Warranty:** Linear power warranty for 25 years, with degradation up to 2.5% in 1st year and 0.6%/year from year 2 to year 25.



Please read Contendresolar warranty documents thoroughly. **DISCLAIMER:** specifications included in the datasheet are subject to change without prior notice owing to continuous innovation on the product Development and R&D Activities. Contendresolar reserves the right to make any adjustment to the information described here, Dataset contained in this specification do not form a representative of a single module data. ©T&C Apply.

+91 91364 57555 www.contendresolar.com


PERFORMANCE WARRANTY

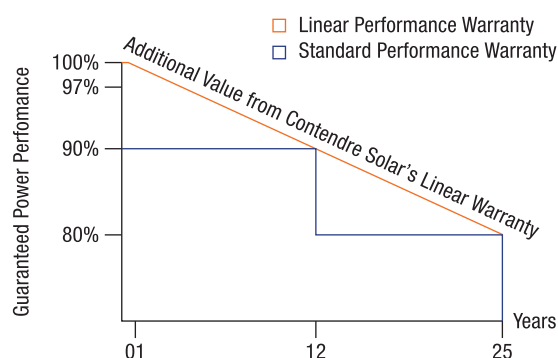

REFERENCE IV CURVE DETAIL

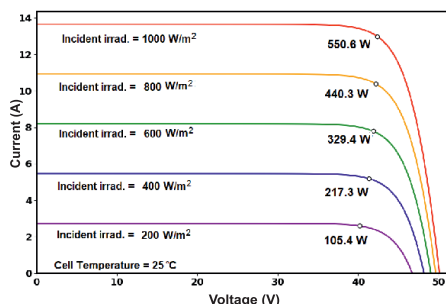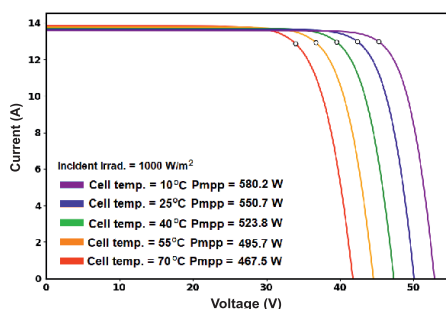

REAR VIEW & MOUNTING DETAIL

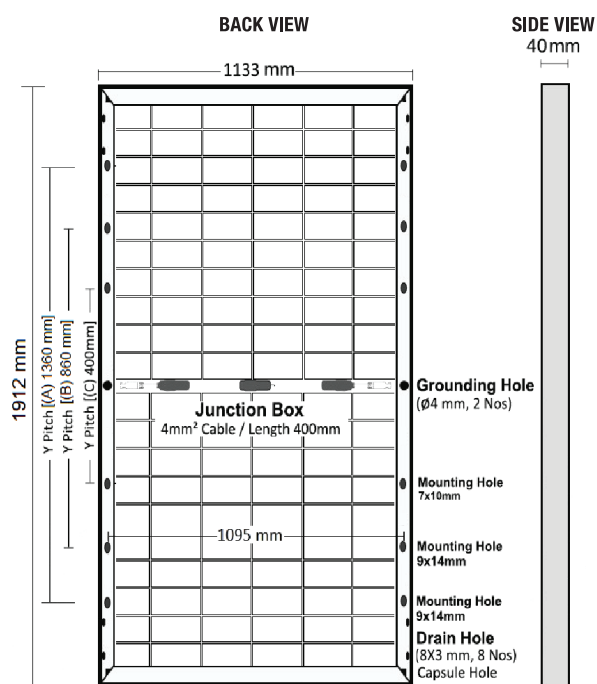

OFFICE: 909, Filix Tower, LBS Road, Bhandup (W), Mumbai, MH-400078. INDIA

FACTORY: Unit i/6, Rajlaxshmi Hi-Tech Park, Sonale Village, Bhiwandi, Maharashtra-421302. INDIA



CONTENDRE
SOLAR

X SERIES



CG X144

535–550W

144 Cut Cells Module
Max Efficiency Combined
With Max Power



THE IDEAL SOLUTION FOR



Rooftop arrays on commercial and industrial buildings



Ground-mounted solar power plants

Contendre (CGPL) is one of the world's leading solar solution experts. We are specialised in high efficiency solar module manufacturing, distribution and research. To utilise our production and technology advantage, we provide our customers with comprehensive solutions for the whole life cycle of solar project.

We use Raw Materials certified by:



Made in India

Note: Specifications subject to technical changes and tests.
Contendre reserves the right of final interpretation.



Multi Busbar Cell Technology

Shorter Distance Between Busbar
Allows Better Flow of Electrons
and Reduce Power Loss.



Cost Effective

Offering high value at low cost,
makes it one of the popular choices
of installers and customers



Lower BOS Costs

Designed for high voltage
systems of upto 1500 VDC,
saving balance of system costs



All-Weather Technology

Optimal yields, whatever the
weather with excellent low-light
and temperature behavior



Enduring High Performance

Long-term yield security with
Anti LID and Anti PID Technology,
Hot-Spot Protect and Traceable Quality



Load Capacity Enhancement

High durability raw materials
helps to withstand high snow (5400 Pa)
and wind loads (2400 Pa)



A Reliable Investment

12 years product warranty and
25 years linear power output warranty
makes it a reliable investment

MECHANICAL SPECIFICATION

Dimensions (LxWxH in mm)	2261x1134x35/40 mm
Weight (kg)	28.5
No. of Cells	144 (12x6 / 12x6)
Aluminum Frame (40HS)	Silver Anodized Aluminum Alloy
Front Cover	Low Iron Tempered Glass (3.2 mm thick)
Encapsulate	Ethylene Vinyl Acetate (EVA) Sheet-free and UV resistant
Backsheet	Fluoro Polymer based PVDF Backsheet
Junction Box with 3-Bypass diode/Rating	Split Junction Box (IP68)—Weather proof / MC4 Compatible
Application Class Rating	Class A
Fire Safety Class Rating	Class II
Mechanical Load Test (as per IEC & UL)	5400 Pa—Front; 2400 Pa—Back
Mounting Holes Pitch (Y)—mm (A) 1400, (B) 400	
Mounting Holes Pitch (X)—mm 1095	

ELECTRICAL PARAMETERS (STC*)

Model	Vol (V)	Vmp (V)	Imp (A)	Isc (A)	Pmax (A)	Eff (%)
CG-X144-550	49.35	42.60	12.95	13.90	550	21.50
CG-X144-545	49.32	42.55	12.85	13.80	545	21.30
CG-X144-540	49.29	42.50	12.75	13.65	540	21.10
CG-X144-535	49.25	42.48	12.60	13.50	535	20.90
CG-X144-530	49.23	42.40	12.50	13.45	530	20.70

*STC (Standard Test Conditions): Irradiance 1000 W/m², Temperature 25°C, Spectrum at AM 1.5G.

ELECTRICAL PARAMETERS (NMOT*)

Model	Voc (V)	Vmp (V)	Imp (A)	Isc (A)	Pmax (A)	Eff (%)
CG-X144-550	44.88	38.41	10.40	11.16	400	19.50
CG-X144-545	44.85	38.36	10.32	11.08	396	19.35
CG-X144-540	44.83	38.32	10.24	10.96	393	19.15
CG-X144-535	44.79	38.30	10.12	10.84	388	19.00
CG-X144-530	44.77	38.23	10.04	10.80	384	18.80

*NMOT (Nominal Module Operating Temperature): Irradiance 800W/m², Ambient Temperature 20°C, Spectrum at AM 1.5G, Wind Speed at 1m/s. (NOCT is similar to NMOT)

MAXIMUM OPERATING CONDITIONS

Operating Temperature	-40°C to +85°C
Maximum System Voltage	1500V
Maximum Series Fuse Rating	25A

TEMPERATURE COEFFICIENTS

Power (Pmax)	-0.278%/°C
Voltage (Voc)	-0.230%/°C
Current (Isc)	+0.05%/°C
NMOT / NOCT	44±2°C

OTHER X SERIES PRODUCTS

- CG-X120-XXX
- 440Wp – 450Wp


Caution: Please read safety and installation instructions

before using the product. ***Warranty:** Linear power warranty for 25 years, with degradation up to 2.5% in 1st year and 0.6%/year from year 2 to year 25.



Please read Contendresolar warranty documents thoroughly. **DISCLAIMER:** specifications included in the datasheet are subject to change without prior notice owing to continuous innovation on the product Development and R&D Activities. Contendresolar reserves the right to make any adjustment to the information described here, Dataset contained in this specification do not form a representative of a single module data. ©T&C Apply.

+91 91364 57555 www.contendresolar.com


PERFORMANCE WARRANTY

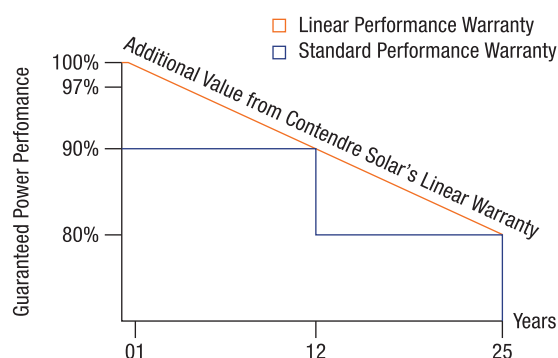

REFERENCE IV CURVE DETAIL

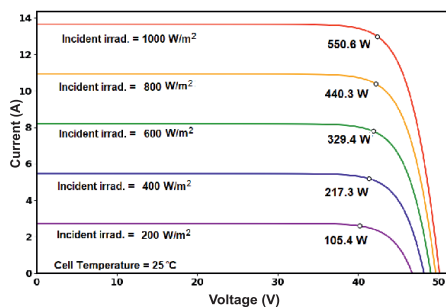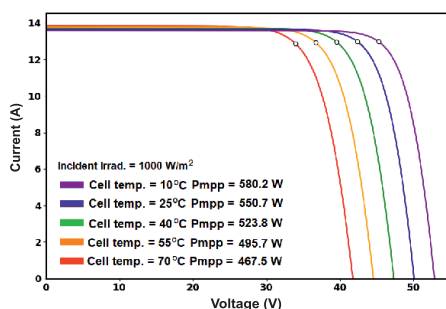

REAR VIEW & MOUNTING DETAIL

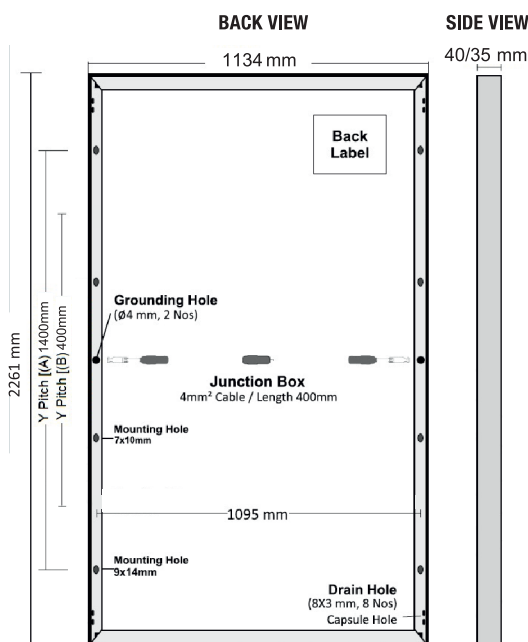

OFFICE: 909, Filix Tower, LBS Road, Bhandup (W), Mumbai, MH-400078. INDIA

FACTORY: Unit i/6, Rajlaxshmi Hi-Tech Park, Sonale Village, Bhiwandi, Maharashtra-421302. INDIA