

HELOC[®] PRO

GS10-B144-TF
(525 Wp - 540 Wp)



High Saving

Lower LCOE, reduced BOS cost,
shorter payback time



PID Resistance

Excellent Anti-PID Performance guarantee
limited power degradation for mass production



High Efficiency

Excellent module conversion
efficiency of up to 20.92%



IP68 Junction Box

High waterproof level



Low-light Performance

Advanced glass and cell surface textured design
ensure excellent performance in low-light environment



INDUSTRY LEADING PROTECTION



12 Years Warranty For
Materials And Processing



25 Years Warranty For
Linear Power Output

BEST IN Grade Quality Class Results

TECHNICAL DATA

Electrical Parameter at STC		Bifacial Monocrystalline Module			
Module Type		GS10-B144-TF			
Capacity rating – Pmax(Wp)		525	530	535	540
Power Tolerance (%)		0-2	0-2	0-2	0-2
Module efficiency (%)		20.34	20.53	20.73	20.92
Rated voltage - Vmp(V)		40.88	41.05	41.20	41.39
Rated current - Imp(A)		12.84	12.91	12.98	13.05
Open circuit voltage - Voc(V)		48.72	48.91	49.10	49.29
Short circuit current - Isc(A)		13.43	13.51	13.59	13.67

Under Standard Test Conditions (STC) of irradiance 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C. Except Pmax, all other parameters have a tolerance of ±3%.

Electrical Parameter at NOCT

Capacity rating – Pmax(Wp)	388.6	392.35	396	399.75
Rated voltage - Vmp(V)	38.13	38.28	38.42	38.60
Rated current - Imp(A)	10.19	10.24	10.30	10.35
Open circuit voltage - Voc(V)	45.56	45.74	45.92	46.09
Short circuit current - Isc(A)	10.81	10.88	10.94	11.01

Irradiance 800 W/m², ambient temperature 20°C, Module temperature 45°C, wind speed 1 m/sec

BI-FACIAL : PMAX WITH REAR SIDE POWER GAIN*

5% Gain	551	557	562	567
10% Gain	578	583	589	594
15% Gain	604	610	615	621
20% Gain	630	636	642	648
25% Gain	656	663	669	675
30 % Gain	683	689	696	702

Additional power gain from rear side compared to power of front side at STC depends on mounting structure (height, tilt angle etc.) and reflectivity of ground.

Bi-Faciality Factor : 70 ± 5 %

PERMISSIBLE OPERATING CONDITIONS

Temperature range	-40°C to + 85°C
Maximum system voltage	1500 VDC
NOCT	45± 2°C
Hail resistance	Max. diameter of 25 mm with velocity 23 m/s


TEMPERATURE COEFFICIENTS (TC)

Temperature Coefficient (Voc)	-0.28% /°C
Temperature Coefficient (Isc)	0.048% /°C
Temperature Coefficient (Pmax)	-0.35% /°C


PACKAGING CONFIGURATION**

Number of Modules per Pallet	31
No of pallet	20
No of module, 40ft HC container	620


IV CURVE



PV CURVE

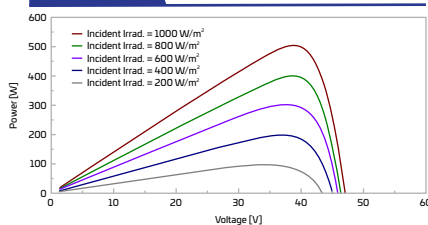



LINEAR GRAPH

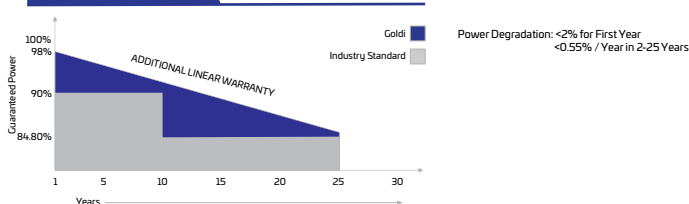

MECHANICAL SPECIFICATION

Solar cells	144 pcs Bifacial monocrystalline Silicon(PERC), Multi BB
Encapsulation	Ultra - clear PID free EVA (Ethylene-Vinyl-Acetate) Encapsulant, UV and Weather stable
Backside	Transparent backsheet-White/Black Mesh Type
Frame	Anodized Aluminium Alloy-Silver/Black
Solar Glass	3.2 mm, High Transmission, AR Coated Tempered Glass
Dimensions	(L) 2279 mm x (W) 1133 mm x (H) 35 mm
Weight	~28 Kg
J-box	IP 68 certified, 3 diodes, Split junction box
Series Fuse Rating	25 A
Cable	4 mm ² , Solar cable 400 mm length or Customized length
Connectors	MC4 Type
Application Class	Class A
Electrical Safety	Class II
Fire Safety	Class C (Type 1)
Surface load	Snow load 5400 Pa, Wind load 2400 Pa

DRAWING (MEASUREMENTS ARE IN MM)

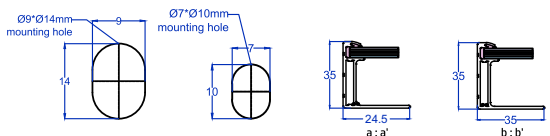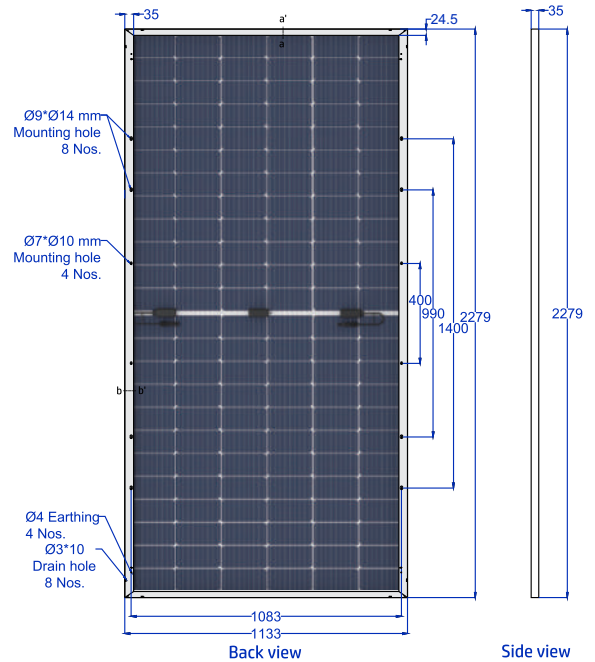

PRODUCT CERTIFICATIONS

IEC 61215: 2016, IEC 61730: 2016, IS 14286:2010/IEC 61215:2005, IS/IEC 61730-1 & 2: 2004
UL 61730-1 & 2, IEC 61701, IEC 62716, IEC 62804, IEC 60068-2-68, CEC

MANAGEMENT SYSTEM CERTIFICATIONS



ISO 9001
ISO 14001
ISO 45001

UTILITY | INDUSTRIAL | AGRICULTURE | RESIDENTIAL | INSTITUTIONAL

- **Quantity of modules/container may get changed without prior notice. Confirm with our sales representative before placing order.
- For handling & installation instructions, refer to Goldi's installation manual available on the company website
- Before placing an order, confirm your requirements with our sales representative
- The electrical data provided here is for reference purposes only
- Dispose of a product as e-waste after the end of its working life
- Refer to Goldi's warranty document for terms and conditions
- Due to constant product modifications, Goldi reserves the right to amend the above specifications without prior notice
- Images in the datasheet are for representation purpose only

1800 833 5511

info@goldisolar.com

goldisolar.com