





Resin Bonded Filter Cartridges

Optimizing Filtration,
Enhancing Operations.

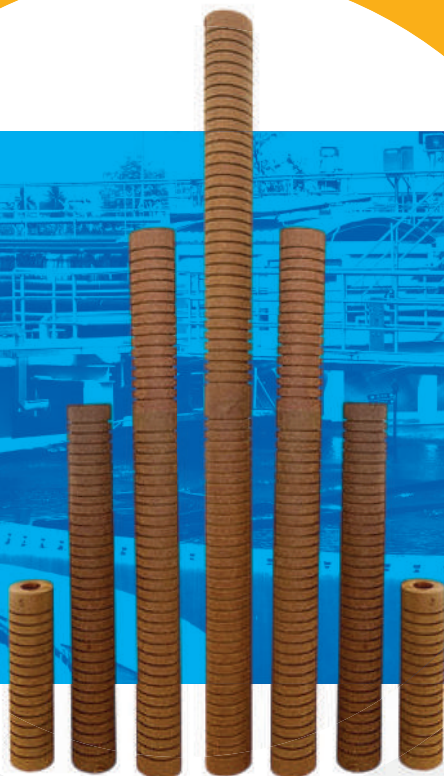

Cross-sectional view for
graded porosity of MRB series
resin bonded filter

The **mmp®** MRB Series Cartridges feature a specialized filtration design that maximizes particle retention and extends service life, all while maintaining a durable, resin-bonded porosity structure. Perfect for filtering viscous fluids in industrial applications.

To ensure compatibility across a broad range of process fluids and performance demands, MRB series cartridges incorporate a carefully selected blend of advanced fibers. This blend creates a gradual tightening structure with uniform micropore size and high porosity, allowing larger particles to be captured on the surface while smaller particles are trapped deeper within. This design enhances retention capacity and extends the cartridge's lifespan, all while providing exceptional cartridge strength.

Available in both grooved and ungrooved versions, the **mmp®** MRB series resin-bonded filters are ideal for various applications, offering versatile and reliable performance for even the most demanding environments.

Features and Benefits

Robust Structure : Two-stage design ensures stability, resisting collapse under high pressure.

High Dirt-Holding Capacity : Enhanced retention extends service life and efficiency.

Varied Micron Ratings : Available in multiple sizes to meet diverse filtration needs.

Chemical Resistance : Compatible with a wide range of industrial chemicals for versatile use.

Applications

- » Paints / Inks / Coatings
- » Emulsions / Adhesives / Resins
- » Organic Solvents / Oil & Gas Fluids
- » Coolants / Various Chemicals Process
- » Water / Wastewater
- » General Manufacturing Processes

Operating Data*

RBF Series


Material	Phenolic Resin & Composite Fiber
Max Temperature	135°C
Operating Pressure	0.45MPa
Solvent Resistance	Expansion rate <2% (Ketones, Ethers, Phenols, Alcohols etc.)
Anti-shrinkage	No shrinkage and depression
Inner Diameter	29mm
Outer Diameter	63-65mm
Length	3.75 to 40 inch
Micro Rating	1, 5, 10, 25, 50, 75, 100, 125, 150, 200µm

Ordering Information

Model	Micron	Length	Adapter
MRB	5=5µm	248 = 9.75inch	DOE = Double Open End
P/N.: MRB-5-248-DOE			

*The information supplied above is based on analysis of production trend. This is subject to change without notice if future trends are adjusted. They are listed for information purposes only and not to be used as purchase specifications. Different lengths and micron ratings are available upon request.

**Typical Flow Rate Clean Water at Ambient Temperature
(per 10" cartridge)**

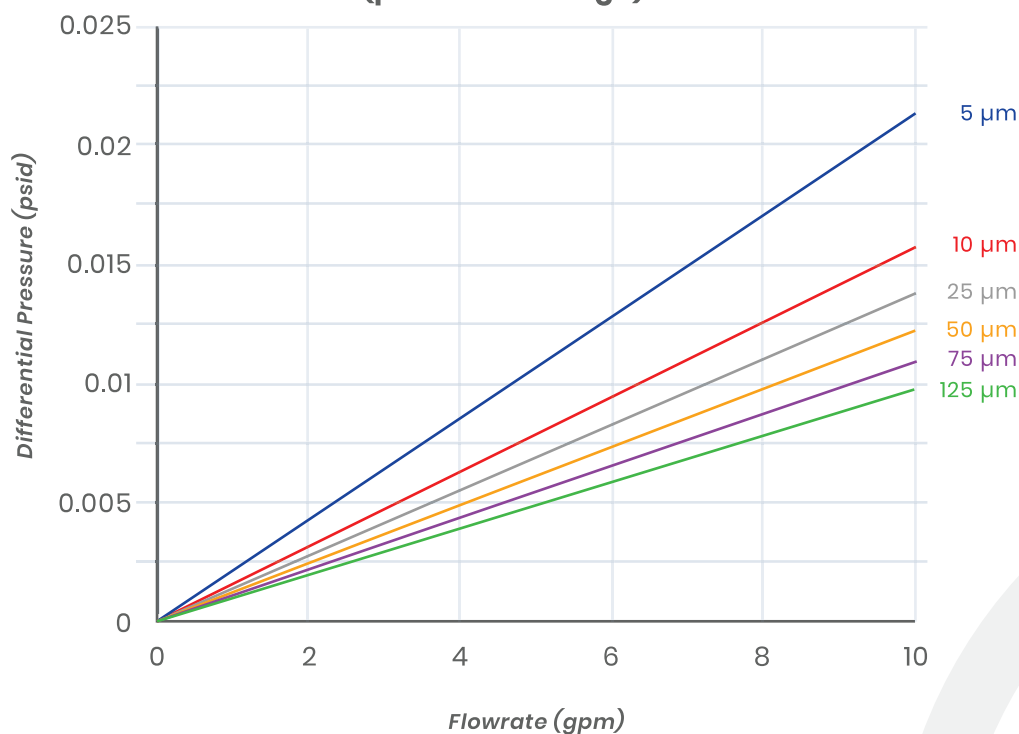

For liquids other than water, multiply pressure drop by the fluid viscosity in centipoise

USE OF PRODUCT IN VARIOUS INDUSTRIES



CHEMICAL



PETROCHEMICALS



PAINTS



COATINGS



FOOD



BEVERAGES



AUTOMOTIVE

Office Address:

C3-602 Anushruti Tower, SG Road, Thaltej,
Ahmedabad – 380059 Gujarat, India

Contact:

+91 70437 45709
+91 98300 30030

Email

ahmd-sales@mmpfilter.com
ntodi@mmpfilter.com