



Cross-sectional view for
Multi-layer of MAB Series
Resin Bonded filter

Reliable & Durable Resin Bonded Filter Cartridges for Industrial Filtration

mmp® MAB Series Cartridges are designed with a unique multi-layer construction that maximizes particle retention and service life, while maintaining a durable, resin-bonded porosity structure. This makes them perfect for viscous fluid filtration applications. Engineered to provide high-efficiency filtration, these cartridges withstand high pressure and temperature, making them ideal for demanding industrial environments where performance and quality are essential.

To meet the diverse needs of various process fluids and filtration requirements, MAB series cartridges utilize a specialized blend of advanced fibers. This creates a gradual tightening structure with uniform micropore size and high porosity. This design ensures that larger particles are captured on the surface of the filter element, while smaller particles are trapped in the deeper layers, enhancing retention capacity and extending the cartridge's usage life—all with exceptional strength and stability.

Features and Benefits

Robust Structure : Two-stage design ensures stability, resisting collapse under high pressure.

High Dirt-Holding Capacity : Enhanced retention extends service life and efficiency.

Varied Micron Ratings : Available in multiple sizes to meet diverse filtration needs.

Chemical Resistance : Compatible with a wide range of industrial chemicals for versatile use.

Applications

- » Paints / Inks / Coatings
- » Emulsions / Adhesives / Resins
- » Organic Solvents / Oil & Gas Fluids
- » Coolants / Various Chemicals Process
- » Water / Wastewater
- » General Manufacturing Processes



Reliable & Durable Resin Bonded Filter Cartridges for Industrial Filtration

Operating Data*

MAB Series


Material	Phenolic Resin & Composite Fiber
Max Temperature	135°C
Operating Pressure	0.45MPa
Solvent Resistance	Expansion rate <2% (Ketones, Ethers, Phenols, Alcohols etc.)
Anti-shrinkage	No shrinkage and depression
Inner Diameter	29mm
Outer Diameter	63-65mm
Length	3.75 to 40 inch
Micro Rating	1, 5, 10, 25, 50, 75, 100, 125, 150, 200µm

Ordering Information

Model	Micron	Length	Adapter
MRB	5=5µm	248 = 9.75inch	DOE = Double Open End
P/N.: MAB-5-248-DOE			

*The information supplied above is based on analysis of production trend. This is subject to change without notice if future trends are adjusted. They are listed for information purposes only and not to be used as purchase specifications. Different lengths and micron ratings are available upon request.

Typical Flow Rate Clean Water at Ambient Temperature
(per 10" non-grooved MAB cartridge)

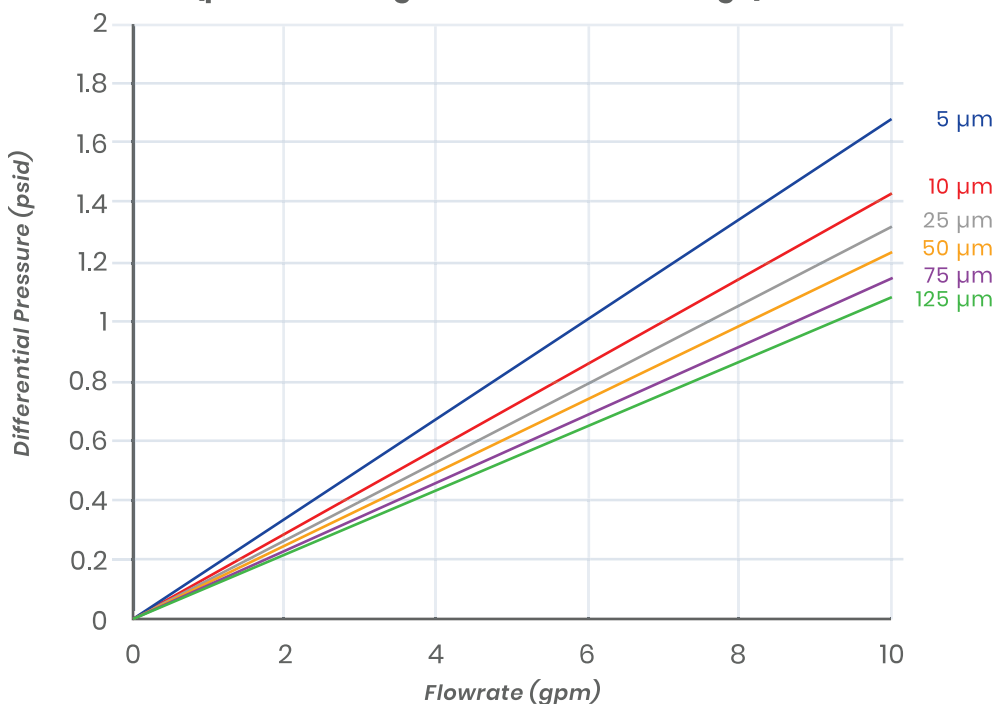

For liquids other than water, multiply pressure drop by the fluid viscosity in centipoise

USE OF PRODUCT IN VARIOUS INDUSTRIES



CHEMICAL



PETROCHEMICALS



PAINTS



COATINGS



FOOD



BEVERAGES



AUTOMOTIVE

Office Address:

C3-602 Anushruti Tower, SG Road, Thaltej,
Ahmedabad – 380059 Gujarat, India

Contact:

+91 70437 45709
+91 98300 30030

Email

ahmd-sales@mmpfilter.com
ntodi@mmpfilter.com