

mmp[®]

HIGH-PERFORMANCE

WATER & AIR FILTRATION

PRODUCTS WITH PRECISION ENGINEERING



PETROLEUM



CHEMICAL



PHARMACEUTICALS



FOOD & DAIRY



WATER TREATMENT



ENERGY



DESALINATION

www.mmpfilter.com

INDEX

SR. NO.	PRODUCTS	PAGE NO.
01	About Us	03
02	DREF Spinning Yarn	04
03	Lagoon Melt Blown Filters	05
04	Hydro Wound Filter Cartridge	06
05	Oceanic Melt Blown Filter	07
06	PP Core for Filter Cartridge	08
07	Pyoorite Pleated Filter Cartridges	09
08	High Flow Pleated Filter Cartridge	10
09	Software Supported Electronic String Wound Filter Machine	11
10	Mechanical String Wound Filter Machine	12
11	Polypropylene Homopolymer Filter Housing	13
12	Resin Bonded Filter Cartridges - MAB Series	14
13	Resin Bonded Filter Cartridges - MRB Series	15
14	Pleated Filter Bags	16
15	Pleated Filter Cartridges	17
16	M-Tex Dust Collector Bags	18
17	Cages for Dust Collector Filter Bags	19
18	Partnership Opportunities	20
19	Certificates	22



ABOUT US

mmp Filtration Pvt. Ltd. is India's leading manufacturer of advanced air and water filtration solutions. With over 30 years of expertise and in-house manufacturing, we deliver globally trusted products that meet international standards.

We are proud to offer NSF-certified melt-blown filter cartridges, reflecting our strong commitment to quality and compliance. From liquid filtration cartridges to air purification systems, our robust product range empowers industries with cleaner, safer, and more reliable filtration solutions across India and worldwide.

Our strong supply chain gets our products all over India & Abroad smoothly. With offices in Kolkata, Mumbai, Chennai, and Ahmedabad, we're here to help businesses upgrade their filtration system.

DREF SPINNING YARN

**UNMATCHED STRENGTH & EFFICIENCY
WITH HIGH ABSORPTION YARN.**

- Uniform breaking strength along the entire length.
- High dirt holding capacity.
- Low flow resistance.
- High filtration efficiency and life of the filter.



Technical Specification

Fiber	Polypropylene / Polyester
Spinning Technology	Dref friction spun yarn count of yarn: 0.4-1.0 Ne
Core Spun Yarn	Multifilament yarn in the core
Fiber Denier	1.4-6 Denier
Package Size	4.5-6.5 kg/spool



HYDRO WOUND[®] FILTER CARTRIDGE

**WOVEN FOR PURITY,
ENGINEERED FOR BRILLIANCE**

- Best Quality Yarn wound with High Precision.
- Higher Dirt Holding Capacity
- Increases life and efficiency of the filter.



Technical Specification

Raw Material	Polypropylene / Polyester / Cotton
Spinning Technology	DREF friction spun yarn count of yarn: 0.4-1.0 Ne
Core Spun Yarn	PP, SS, tinned steel

LAGOON[®] MELT BLOWN FILTERS



**ENGINEERED FOR EXCEPTIONAL
FILTRATION, THERMAL STABILITY,
AND EXTENDED SERVICE LIFE**

- Suitable for Domestic purposes.
- Graded pore structure offers superior filtration.
- Extremely light weight with a seamless finish




Technical Name	Melt Blown Filter Cartridges (Medium Density)
Raw Material	Virgin Polypropylene
ID	20-35mm±
OD	50-63mm± 1mm Jumbo 114± 2mm
Length	5"-50" 127mm to 1778mm
Microns	1-100μ
Construction	Polypropylene fibres are extruded through tiny perforations under pressure and high temperature on a rotating mandrel, forming three layers for gradient filtration
Flow	1m ³ per hour per 10" at pressure of 2.5Kg/cm ²
Temperature	Max. 60° C

OCEANIC[®] MELT BLOWN FILTERS



**ENGINEERED FOR EXCEPTIONAL
FILTRATION, THERMAL STABILITY,
AND EXTENDED SERVICE LIFE**

- suited for fine particle filtration and coarse filtration.
- Compatible with a wide range of fluids, including water, chemicals, oils, and gases.
- Longer service life.

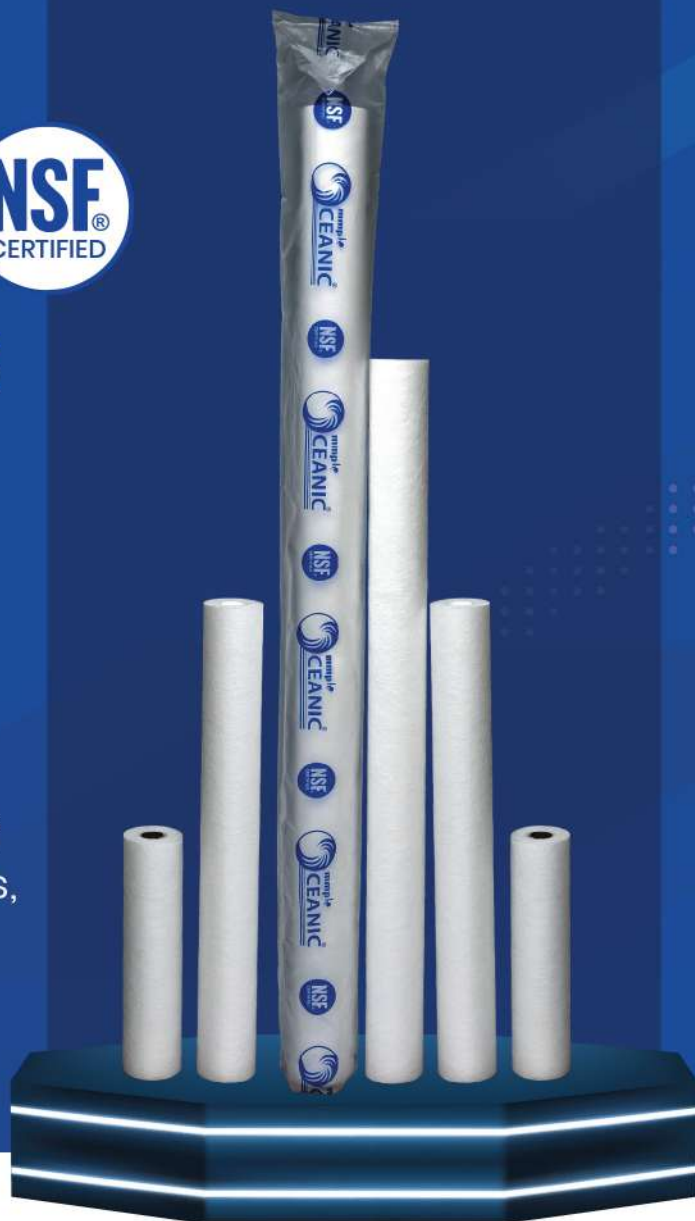

Technical Name	Melt Blown Filter Cartridges (High Density)
Raw Material	Virgin Polypropylene
ID	20-35mm±
OD	40-114mm±
Length	5"-70" 127mm to 1778mm
Microns	0.5-100μ
Construction	Polypropylene fibres are extruded through tiny Perforations under pressure and high temperature on a rotating mandrel, forming three layers for gradient filtration.
Flow	1m ³ per hour per 10" at pressure of 3.5Kg/cm ²
Temperature	Max. 60° C

PYLOORITE[®] PLEATED FILTER CARTRIDGES

TAILORED FOR PURE WATER WITH PRECISE DESIGN

- Innovative construction ensures pure water consistently in a sleek, seamless 20-inch design.
- Customized precision with micron options ranging from 0.1 to 10μ.
- Constructed with premium virgin polypropylene.



Technical Name	PP Pleated Filter Cartridges
Raw Material	Virgin Polypropylene
ID	27 mm
OD	65 mm or as required by customer
Length	5" 10" 20" 30" 40" & 50"
Microns	0.1, 0.2, 0.45, 1, 2, 5 & 10μ
Construction	Inside and outside perforated core, In between pleated membrane filtration media.
Top & Bottom	DOE (Double open end) SOE (Single open end)
Flow	1m ³ per hour per 10" at pressure of 2.5kg/cm ²
Temperature	60° C

HIGH FLOW PLEATED FILTER CARTRIDGE

**HIGH FLOW RATE, AND ROBUST
CONSTRUCTION FOR OPTIMAL
PARTICLE CAPTURE.**

- Comes with a filtration area and versatile chemical compatibility
- High flow rate, coupled with robust construction for long-lasting durability.
- Optimal particle capture and has good dirt-holding capacity.



Application

Sea water desalination

Oil & Chemical

Food and Beverages

White Fuels

Process Water

Amine, Glycol

Power plant water treatment

Naphtha, HC Condensate


RO Guard Pre-filtration

Steel mill water treatment

PP CORE FOR FILTER CARTRIDGE

CRAFTED BY EXPERTS FOR DURABLE FILTRATION

- Crafted from top-tier Polypropylene, ensuring robustness for extended and high-quality filtration.
- Reinforced with a Tinned Steel Core, providing reliability and consistent performance.
- Versatile size for various needs.

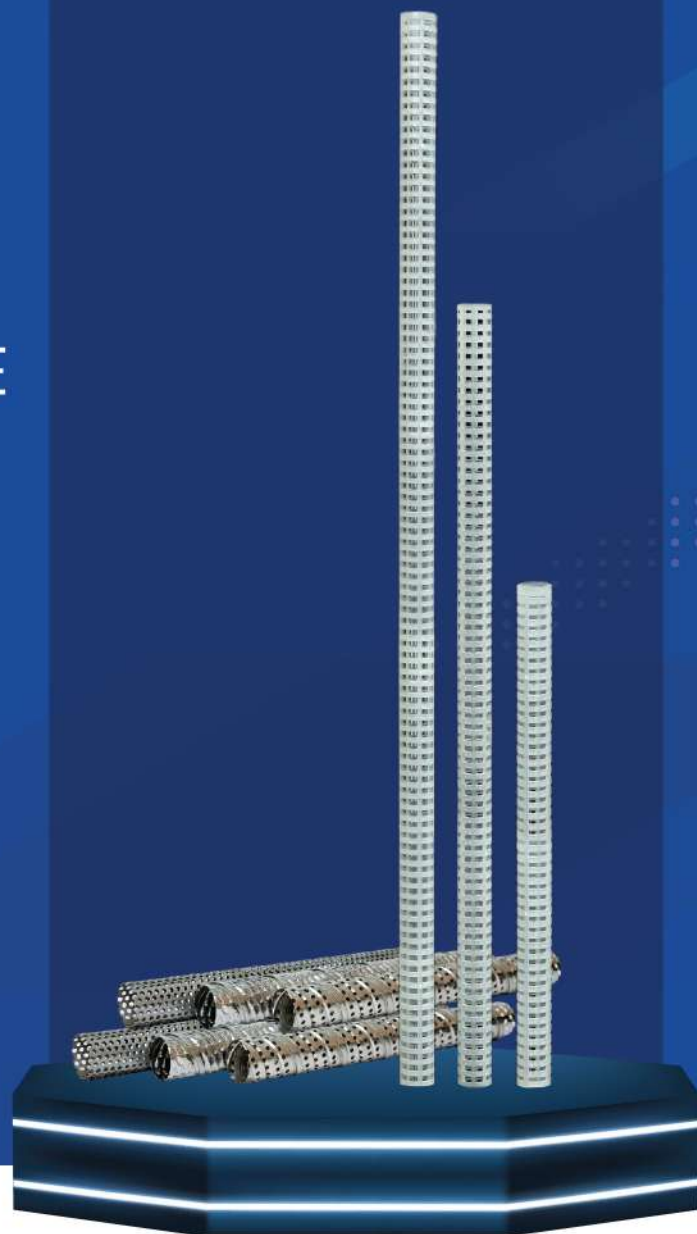

Technical Name	Core for Filter Cartridge
Raw Material	Polypropylene
	Stainless Steel Core
	Tinned Steel Core
ID	28 mm
Length	10", 20", 30", 40" Single Drawn Core

SOFTWARE SUPPORTED ELECTRONIC STRING WOUND FILTER MACHINE

- Electronically controlled.
- Easy to use.
- Low maintenance.
- Winding Core Material :
Polypropylene, Stainless
Steel, Tinned Steel.



Technical Name	Software Supported Electronic String Wound Filter Machine
Drive & Motor	Encoder with variable frequency motor Servo motor / Servo drive
Power	AC 220V/ 50HZ single phase
Winding Core Material	Polypropylene, Melt Blown, Stainless Steel, Tinned Steel
Winding Tube	28mm
Winding length	250/254mm, 500/508mm, 750/762mm, 1000/1016 mm
Sensor	Automatic stop sensor
Winding OD Diameter	200mm

The pattern and precision of winding by software Support
Ratio Input for winding filters
No gears required for changing filter pattern
Low maintenance

MECHANICAL STRING WOUND FILTER MACHINE

- Versatile Power Options.
- Flexible Winding Lengths.
- Dual Spindle Operation.
- Easy to use.
- Low maintenance.
- Winding Core Material :
Polypropylene, Stainless
Steel, Tinned Steel.



Technical Name	Mechanical String Wound Filter Machine
Drive and Motor	Variable AC frequency drive and motor
Power	220V/50HZ, Single Phase
Winding Core Material	Polypropylene, Stainless Steel, or Tinned Steel
Winding Tube Diameter	28mm
Winding Lengths Available	222, 235, 250, 254, 500, 508, 750, 762, 1000, 1016, 1270, 1778 mm
Automatic Stop Sensor	Activates at desired cartridge diameter
Winding Outer Diameter (OD)	45 mm - 200 mm
Pattern and Precision	Achieved through timing gears
Maintenance	Designed for minimal maintenance

POLYPROPYLENE HOMOPOLYMER FILTER HOUSING

- Leak-free one-piece design
- High pressure & temperature resistance
- Excellent corrosion resistance
- Easy maintenance & operation




Specifications

Housing Materials	Polypropylene Homopolymer
Housing direction	Vertical
Depth filter type	String Wound Cartridge Melt Blown Cartridge Pleated Cartridge Filter Bags High flow Cartridge
Housing Thickness	16 mm, 22 mm
Connection	Side port, Bottom port
Inlet/ Outlet Type	Flange
Inlet/Outlet Size	DN40, DN50, DN65, DN80 DN100
Sealing Type	Screwing cap type, Swing bolt type
Seal material	Viton

RESIN BONDED FILTER CARTRIDGES

MRB SERIES

- High dirt-holding capacity
- Chemical-resistant resin bonded filters
- Strong, durable, and long-lasting
- Versatile for water treatment, pharma, food & beverage, and chemicals.



Cross-sectional view for
graded porosity of MRB series
resin bonded filter



Operating Data*	RBF Series
Material	Phenolic Resin & Composite Fiber
Max Temperature	135°C
Operating Pressure	0.45MPa
Solvent Resistance	Expansion rate <2% (Ketones, Ethers, Phenols, Alcohols etc.)
Anti-shrinkage	No shrinkage and depression
Inner Diameter	29mm
Outer Diameter	63-65mm
Length	3.75 to 40 inch
Micro Rating	1, 5, 10, 25, 50, 75, 100, 125, 150, 200µm

RESIN BONDED FILTER CARTRIDGES

MAB SERIES

- Robust Structure
- High Dirt-Holding Capacity
- Varied Micron Ratings
- Chemical Resistance

Cross-sectional view for
Multi-layer of MAB Series
Resin Bonded filter



Operating Data*	MAB Series
Material	Phenolic Resin & Composite Fiber
Max Temperature	135°C
Operating Pressure	0.45MPa
Solvent Resistance	Expansion rate <2% (Ketones, Ethers, Phenols, Alcohols etc.)
Anti-shrinkage	No shrinkage and depression
Inner Diameter	29mm
Outer Diameter	63-65mm
Length	3.75 to 40 inch
Micro Rating	1, 5, 10, 25, 50, 75, 100, 125, 150, 200µm

PLEATED FILTER BAGS

**DURABLE, COMPATIBLE, AND
OPTIMAL FOR VARIOUS
FILTRATION SYSTEMS.**

- Different fabric options with various coatings and flexible pleat depths.
- Compatible with various filtration systems.
- Made with durable materials.



Technical Name	Pleated Filter Bags
Fabric	Spun bonded: Polyester, Polypropylene, Aramid, PPS, PTFE Non woven: Polyester, Aramid, PPS, PTFE Coating
Coating	PTFE membrane lamination, Oil and Water repellent, Antistatic, Oil and water repellent + antistatic, PTFE coating
Pleats	16mm & 25mm (standard pleat depth) As required by the customer
Top & Bottom	Mild Steel, Galvanized Iron, Stainless steel, Polyurethane
Fitment suitable for cell plate diameter	130mm, 160mm, As required by the customer
Length	As required by customer

PLEATED FILTER CARTRIDGES

**LONG-LASTING PERFORMANCE,
SYSTEM COMPATIBILITY, AND
CUSTOMIZED SIZING**

- Pleatex Pleated Cartridges are offered in tailored fabric, coating, and pleat options for adaptable filtration solutions.
- Crafted for enduring performance and compatibility with various systems.
- Flexible fitment options and tailored sizing.



Technical Name	Pleated Cartridges
Fabric	Spun bonded, Polypropylene, Aramid (Nomex), PPS, PTFE, Cellulose
Coating on Fabric	PTFE membrane lamination, Oil and Water repellent Antistatic, Oil and water repellent + antistatic PTFE coating
Pleats	16mm – 48mm (standard pleats) As required by the customer
Top & Bottom	SS, Aluminium, MS
Fitment	3 lugs/Din/PCD type Loading from top or from bottom as required
Length	3 Lug: 150, 222 & 325mm size Din Type Size: as required by the customer PCD Type Size: as required by customer
OD	3 Lug: 150, 222 & 325mm size Din Type Size: as required by the customer PCD Type Size: as required by customer
ID	According to OD
Length	As required by customer

M-TEX DUST COLLECTOR BAGS

CUSTOMIZABLE EFFICIENCY, TAILORED FILTRATION WITH VERSATILE FABRICS, FITMENT OPTIONS, AND LENGTH CUSTOMIZATION.

- Efficient Dust Capture with Variable coatings.
- Offering a variety of fabrics for tailored filtration.
- It can be modified as per customer requirements and applications.



Technical Name	Non Woven Dust Collector bags Woven Dust Collector bags
Fabric	Polyester, Meta-aramid (Nomex), Acrylic homopolymer, Acrylic co-polymer, Polyphenylene Sulphide (PPS), Polyimide (P84), Glass Fibre, Polypropylene, PTFE
Coating on Fabric	Oil and water repellent, Antistatic, Oil and water repellent + antistatic PTFE coating, PTFE membrane lamination
Fitment	Snap Band/Collar/Rope type
Joint	Stitching/Heat Sealing
ID & OD	As required by the customer
Length	As required by the customer

CAGES FOR DUST COLLECTOR FILTER BAGS

**HIGH-END CAGES MANUFACTURED
WITH PRECISION, VARIABLE CONFIGURATIONS,
AND ROBUST SUPPORT GRIDS.**

- Offer material options like Mild Steel, Stainless Steel, and Galvanized Iron for diverse filtration conditions.
- Variable rods and rings meet unique filtration requirements.
- Support grids & diverse Venturi options like Stainless Steel, Galvanized Iron, Cast Iron, and Aluminium.
- Automatic Welding



MOC	MS SS GI
No. of Rods	As required by the customer
No. of Rings	As required by the customer
Thickness of wire	3mm to 4mm
Venturi MOC	SS, GI, Cast Iron, Aluminium
Length	As required by the customer

PARTNERSHIP OPPORTUNITIES FOR EXCELLENCE IN WOUND POLYPROPYLENE FILTER CARTRIDGES

With over 30 years of experience, Hydro[®] Wound is a trusted name in the filtration industry. We are proud to be the only company in India that manufactures most of the necessary raw materials for wound filter cartridges. Our expertise and commitment to quality ensure that our products meet the highest standards.

Why Choose Hydro[®] Wound?




In-House Manufacturing

We produce all essential components, including yarn, cores, wound filter cartridge machine and of course our Hydro[®] Wound cartridges too.



**DREF SPUN
YARN FOR
FILTRATION**

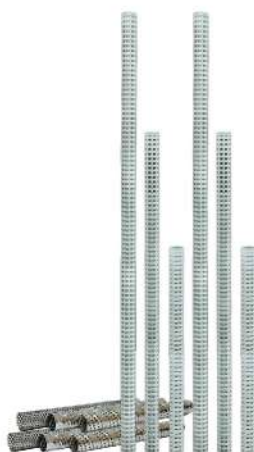

**PP CORE
FOR FILTER
CARTRIDGE**



**WINDING MACHINE
FOR WOUND
FILTER**



**HYDRO[®]
WOUND
FILTER
CARTRIDGE**



Customized Solutions

We offer customized solutions to meet specific filtration requirements.



Proven Track Record

Our long-standing presence in the market is a testament to our reliability and expertise.

Wound Filter Cartridges

Hydro[®] Wound polypropylene / Absorbent Bleached Cotton filter cartridges are designed for optimal performance and reliability. Our filters are ideal for various applications, including:



Water Treatment



Petroleum



Chemical



Pharmaceuticals



Food & Dairy

Key Features



Superior Filtration

Our filters provide exceptional dirt-holding capacity and high flow rates.



Durability

Made with high-quality polypropylene / Absorbent bleached cotton our cartridges are built to last.



Versatility

Suitable for a wide range of filtration needs, ensuring clean and safe operations.

Partnership Opportunities

Hydro[®] Wound offers more than just top-quality products. For businesses interested in manufacturing their own fully professional filter cartridges, we provide:

Raw Materials: High-grade yarn and cores.

Manufacturing Machines: State-of-the-art machinery for producing wound filter cartridges.

Technical Support: Comprehensive guidance and support to ensure successful production.

CERTIFICATES


 केन्द्रीय अर्थव्यवस्था व राजस्व विभाग
 CENTRAL BOARD OF INDIRECT TAXES AND CUSTOMS
 भारत सरकार
 GOVERNMENT OF INDIA


प्रमाणित आर्थिक संयोजक एक्सपोर्टर-आयातकर्ता
AUTHORIZED ECONOMIC OPERATOR MSME CERTIFICATE
(IMPORTER & EXPORTER)


 भारतीय सीमा शुल्क
 INDIAN CUSTOMS

प्रमाणपत्र संख्या Certificate Number : IN AADCM4694A1F212
 कम्पनी का नाम : M/s MMP FILTRATION PVT. LTD.
 Name of Company : 22 MOHAN TALLA STREET, KOLKATA, WEST BENGAL, 700005
 IEC Number : 0203003136

अनारक्षित आयात/रिपोर्ट को सुनिश्चित करने हेतु आपकी प्रविष्टि का समान करने हुए एवं टैक्स से ओ के सेफ्टी के अन्तर्गत में से ओ आई सी के परिपत्र संख्या 33/2016-सीमा शुल्क, दिनांक 22.07.2016 तथा परिपत्र संख्या 54/2020-सीमा शुल्क, दिनांक 15.12.2020 के अन्तर्गत भारतीय सीमा शुल्क अपने प्रविष्टि अधिकार (एईओ) कार्यक्रम में आपकी प्रविष्टि को प्रमाणित करने है। इस प्रमाणपत्र को वैधता से ओ आई सी परिपत्र संख्या 18/2021 दिनांक 31.07.2021 प्रवर्धन के अधीन है।

In recognition and appreciation of your commitment to secure the international supply chain and in compliance with the WCO SAFE Framework of Standards, Indian Customs certifies your esteemed organization in its Authorized Economic Operator (AEO) programme under CBIC Circular Number 33-2016-Customs, dated 22.07.2016 read with Circular Number 54/2020-Customs dated 15.12.2020. The validity of this certificate is subject to the provisions of CBIC Circular No. 18/2021 dated 31.07.2021.

आरटी अडवांस सिस्टिमा
 आरटी अडवांस सिस्टिमा
 ए ई ओ कार्यक्रम प्रबंधक/प्रधान अधिकारी
 AEO Programme Manager/Pr. Commissioner
 अनारक्षित सीमा शुल्क निदेशालय
 Directorate of International Customs

स्थान : नई दिल्ली
 Place : New Delhi
 दिनांक : 25.09.2021
 Date : 25.09.2021
 This Certificate is digitally signed by AEO Programme Manager


OFFICIAL LISTING

NSF certifies that the products appearing on this listing conform to the requirements of NSF/ANSI 61 - Drinking Water System Components - Plastic Filters.

This is the Official Listing recorded on August 3, 2021.

MMP Filtration Pvt. Ltd.,
 C3-602 Anandnagar Tower
 Mr. Jain Dharma, 80 Road
 Thakur, Ahmedabad, Gujarat
 380015
 India
 IN 79 26858031

Facility: Gujarat, India

Trade Designation / Filtration Device / Component	Size	Water Contact Days	Value Contact Material
Laport Multi Stage Cartridge - (1) (2)	(1)	120-24	99
(2) (3)	(3)	120-24	99

(1) The Laport Multi Stage Cartridge - (1) is certified for a minimum flow rate of 1,000 Liters per day per inch of filter for use in industrial water treatment facilities only.
 (2) The Laport Multi Stage Cartridge - (2) and Laport Multi Stage Cartridge - (3) require a pre-wash cycle for 1 minute at a minimum of 2.1 gpm (11 gal).
 (3) Products are certified with the following range of sizes and micron ratings:
 Length: 127 mm to 178 mm
 Width: 50 mm to 53 mm
 Micron Rating: 5 to 100 µm
 (4) The Laport Multi Stage Cartridge - (3) is certified for a minimum flow rate of 1,400 Liters per day per inch of filter for use in industrial water treatment facilities only.
 (5) Products are certified with the following range of sizes and micron ratings:
 Laport Multi Stage Cartridge - (3)
 Length: 127 mm to 178 mm
 Width: 50 mm to 53 mm
 Micron Rating: 5 to 100 µm

07794119


OFFICIAL LISTING

NSF certifies that the products appearing on this listing conform to the requirements of NSF/ANSI 175 - Drinking Water System Components - Lead Control.

This is the Official Listing recorded on August 3, 2021.

MMP Filtration Pvt. Ltd.,
 C3-602 Anandnagar Tower
 Mr. Jain Dharma, 80 Road
 Thakur, Ahmedabad, Gujarat
 380015
 India
 IN 79 26858031

Facility: Gujarat, India

Filtration Device / Component:
 Laport Multi Stage Cartridge - (1)
 Laport Multi Stage Cartridge - (2)

07794119

NSF International
 789 N. Dixboro Road, Ann Arbor, MI 48105 USA
 RECOGNIZES
MMP Filtration Pvt. Ltd.
 India
 AS COMPLYING WITH NSF/ANSI CAN 61, 372 AND ALL APPLICABLE REQUIREMENTS.
 PRODUCTS APPEARING IN THE NSF OFFICIAL LISTING ARE AUTHORIZED TO BEAR THE NSF MARK.





This certificate is the property of NSF International and must be returned upon request. This certificate remains valid as long as the user has products in NSF's official listing for the referenced standards. For the most current and complete listing information, please access NSF's website (www.nsf.org).

August 2, 2021
 Certificate C0751134-01

 David Perkins
 Vice President, Global Water Division

NSF International
 789 N. Dixboro Road, Ann Arbor, MI 48105 USA
 RECOGNIZES
MMP Filtration Pvt. Ltd.
 Facility: Gujarat, India
 AS COMPLYING WITH NSF/ANSI CAN 61, NSF/ANSI 372 AND ALL APPLICABLE REQUIREMENTS.
 PRODUCTS APPEARING IN THE NSF OFFICIAL LISTING ARE AUTHORIZED TO BEAR THE NSF MARK.





This certificate is the property of NSF International and must be returned upon request. This certificate remains valid as long as the user has products in NSF's official listing for the referenced standards. For the most current and complete listing information, please access NSF's website (www.nsf.org).

August 4, 2021
 Certificate C0751135-01

 David Perkins
 Vice President, Global Water Division

NSF International
 789 N. Dixboro Road, Ann Arbor, MI 48105 USA
 RECOGNIZES
MMP Filtration Pvt. Ltd.
 Facility: Gujarat, India
 AS COMPLYING WITH NSF/ANSI CAN 61, 372 AND ALL APPLICABLE REQUIREMENTS.
 PRODUCTS APPEARING IN THE NSF OFFICIAL LISTING ARE AUTHORIZED TO BEAR THE NSF MARK.





This certificate is the property of NSF International and must be returned upon request. This certificate remains valid as long as the user has products in NSF's official listing for the referenced standards. For the most current and complete listing information, please access NSF's website (www.nsf.org).

August 2, 2021
 Certificate C0751136-01

 David Perkins
 Vice President, Global Water Division

OUR GLOBAL PRESENCE



mmp[®]

Ahmedabad Office

C3-602, Anushruti Tower, SG Road, Thaltej,
Ahmedabad – 380059, Gujarat, India.

Contact

+91 70437 45709, +91 98300 30030

Email

ahmd-sales@mmpfilter.com
ntodi@mmpfilter.com