

mmp[®]

www.mmpfilter.com



ABOUT US

mmp is on a mission to make daily life better with practical cleaning solutions for air and water. We're proud pioneers in India, making top-notch water and air filters and dust bags in our advanced plants in Kolkata, Mumbai, Chennai, and Ahmedabad. We know the whole process, from design to production, to ensure quality filters that meet global standards.

We're the first in India to design NSF-certified melt-blown filters, for our strong commitment to quality. We keep things simple and effective, making our filters efficient and accessible to every industry. Presenting our brochure for Liquid Filtration Cartridges & Products.

Our strong supply chain gets our products all over India & Abroad smoothly. With offices in Kolkata, Mumbai, Chennai, and Ahmedabad, we're here to help businesses upgrade their filtration system.



mmp[®]

HIGH-PERFORMANCE WATER FILTRATION PRODUCTS WITH PRECISION ENGINEERING



PETROLEUM



CHEMICAL



PHARMACEUTICALS



FOOD & DAIRY



WATER TREATMENT



ENERGY



DESALINATION



www.mmpfilter.com



DREF SPINNING YARN

**UNMATCHED STRENGTH & EFFICIENCY
WITH HIGH ABSORPTION YARN.**

- Uniform breaking strength along the entire length.
- High dirt holding capacity.
- Low flow resistance.
- High filtration efficiency and life of the filter.



Manufactured from materials which are listed for food contact applications in Title 21 CFR 177.1520 (Olefin Polymers) of the U.S. Code of Federal Regulations.

Technical Specification

Fiber	Polypropylene / Polyester
Spinning Technology	Dref friction spun yarn count of yarn: 0.4-1.0 Ne
Core Spun Yarn	Multifilament yarn in the core
Fiber Denier	1.4-6 Denier
Package Size	4.5-6.5 kg/spool






ZERO FOAMING YARN

THE ZERO-FOAM BREAKTHROUGH A STORY OF INNOVATION IN FILTRATION YARN

- Designed to eliminate foaming during filtration
- Ensures smooth, efficient and reliable performance
- Ideal for consistent purity across applications

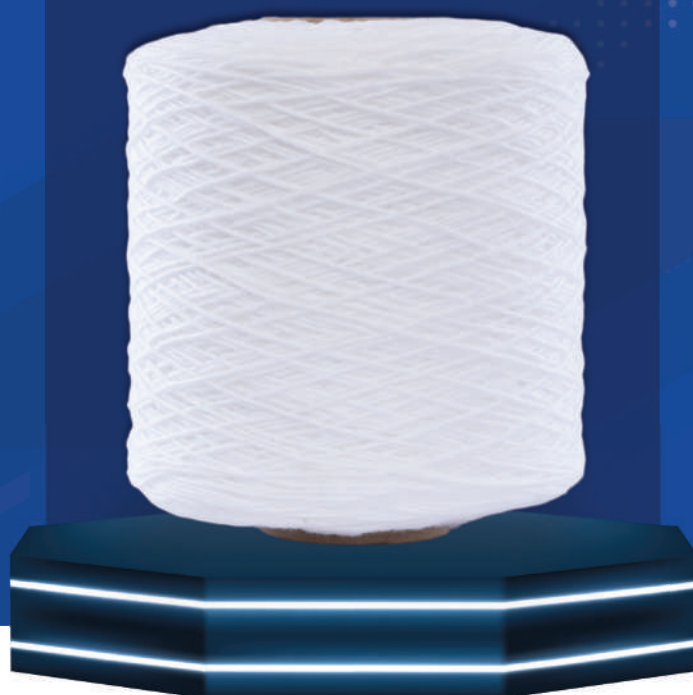

Parameter	Value / Range
Yarn Count (NE)	0.6 to 1.5 NE
Fiber Type	100% Polypropylene (Virgin)
Tenacity	≥ 2.5 g/denier
Elongation at Break	20-30%
Surface Finish	Dry, Anti-static
Foaming Behavior in Water	Zero
Recommended Micron Rating Use	1 to 100 micron filters
Temperature Resistance	Up to 80°C (176°F)
Yarn Form	Cone or Cheese
Package Weight	3.5-4.0 kg per cone
Packaging	Shrink-wrapped & Boxed





ANTI-MICROBIAL POLYPROPYLENE FILTRATION YARN

**CRAFTED BY EXPERTS FOR
SAFE & RELIABLE FILTRATION**

- Infused with antimicrobial properties to prevent bacterial growth
- Ensures pure, long-lasting and consistent performance
- Available in multiple sizes for varied filtration needs



FEATURE	YARN	CARTRIDGE (E.G., 10")
Base Material	Polypropylene	Polypropylene shell + PP yarn
Antimicrobial Agent	Silver-based additive	Integrated during winding
Denier Range	150–300	----
Tensile Strength	≥ 50 cN/tex	----
Cartridge Length	-----	254 mm (10 in)
Outer Diameter	-----	63 mm
Flow Rate Capacity	----	Up to 10 L/min at 1 bar
Micron Rating	Yarn: 0.5–5 µm	Cartridge: 1–50 µm





ABSORBENT BLEACHED COTTON YARN

PURE ABSORPTION, SUPERIOR PERFORMANCE

- Superior absorbency for medical, hygiene, and cleaning applications
- Soft, pure, and safe with excellent whiteness and sterilization
- Versatile usability across dressings, swabs, bandages, and textiles



Material	100% Pure Cotton Comber
Fiber Source	H2O2 Bleached Cotton Comber Noil
Micronaire Value	≥ 2.85
Trash Percentage	Nil
pH Value	6.80 to 7.20 (Achieved through double acid treatment post-bleaching)
Moisture Content	3-4%
Water Absorption Capacity	24 times its own weight






PP CORE FOR FILTER CARTRIDGE

CRAFTED BY EXPERTS FOR DURABLE FILTRATION

- Crafted from top-tier Polypropylene, ensuring robustness for extended and high-quality filtration.
- Reinforced with a Tinned Steel Core, providing reliability and consistent performance.
- Versatile size for various needs.

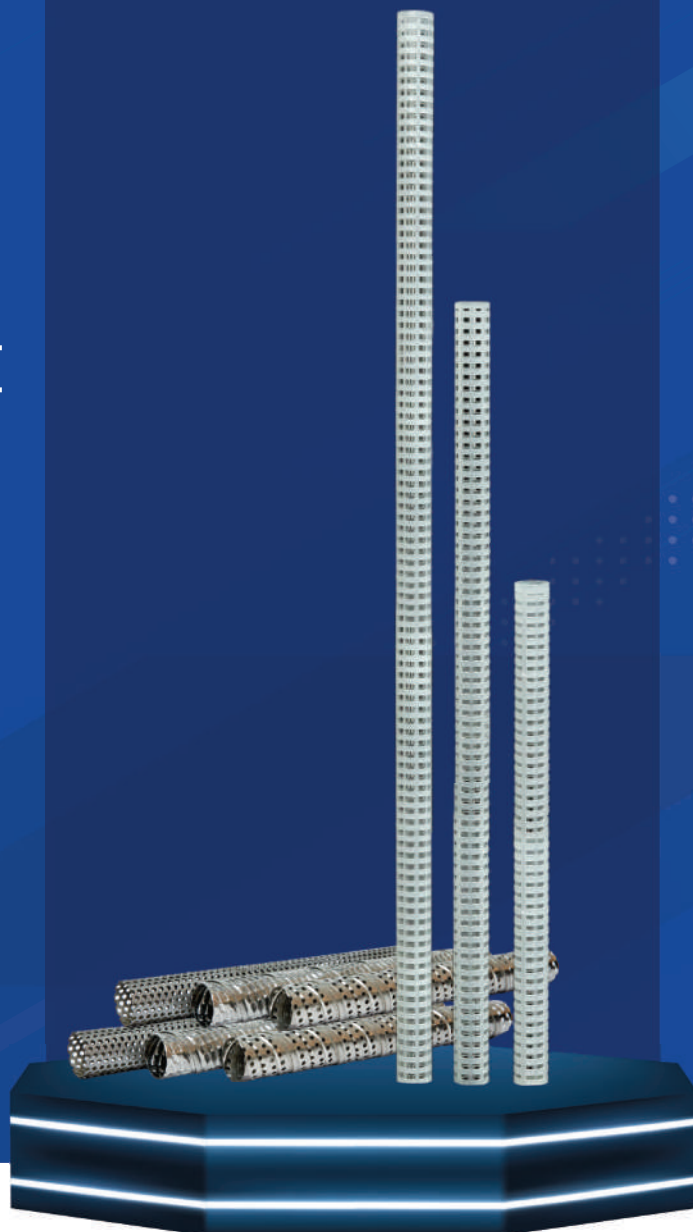

Technical Name	Core for Filter Cartridge
Raw Material	Polypropylene
	Stainless Steel Core
	Tinned Steel Core
ID	28 mm
Length	10", 20", 30", 40" Single Drawn Core





HYDRO WOUND[®] FILTER CARTRIDGE

**WOVEN FOR PURITY,
ENGINEERED FOR BRILLIANCE**

- Best Quality Yarn wound with High Precision.
- Higher Dirt Holding Capacity
- Increases life and efficiency of the filter.

Manufactured from materials which are listed for food contact applications in Title 21 CFR 177.1520 (Olefin Polymers) of the U.S. Code of Federal Regulations.



Technical Specification

Raw Material	Polypropylene / Polyester / Cotton
Spinning Technology	DREF friction spun yarn count of yarn: 0.4-1.0 Ne
Core Spun Yarn	PP, SS, tinned steel






ANTI-MICROBIAL WOUND FILTER CARTRIDGE

**CRAFTED BY EXPERTS FOR HYGIENIC
AND LONG-LASTING FILTRATION**

- Premium yarn with anti-microbial protection
- Resists bacterial growth for pure, safe filtration
- Durable performance in multiple sizes

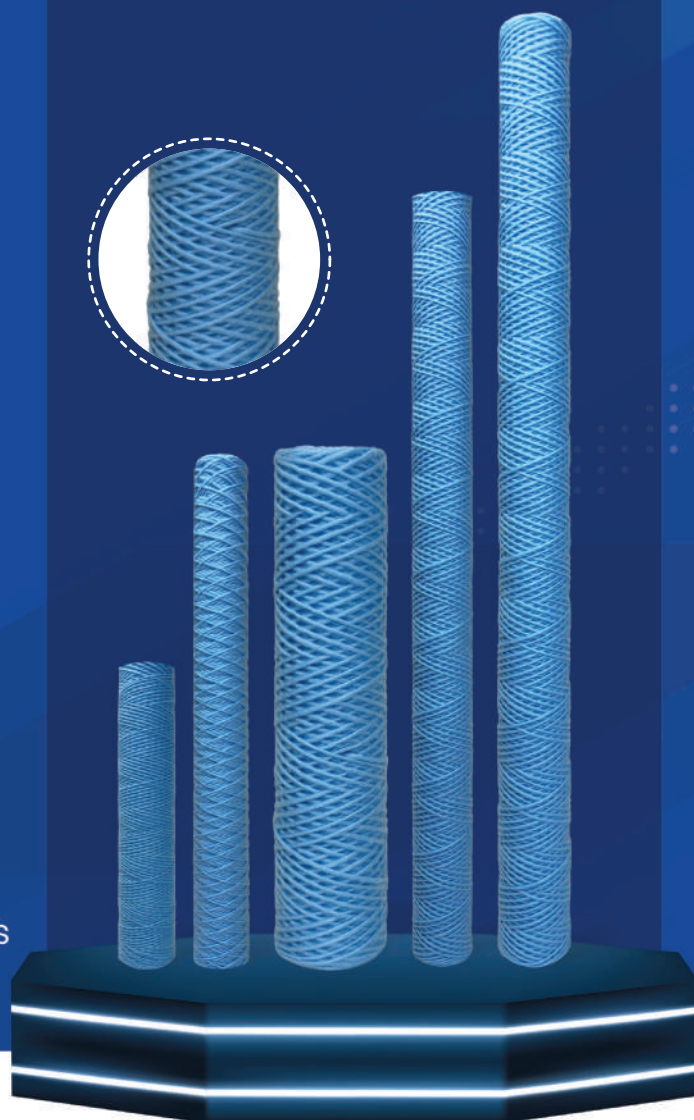

Parameter	Details
Material	Polypropylene with Antimicrobial Agent
Micron Rating	1, 5, 10, 25, 50 μm
Cartridge Length	10", 20", 30", 40"
Core Type	Polypropylene / Stainless Steel
Operating Temp	Up to 80°C
Max Differential Pressure	2.5 bar @ 25°C
End Cap Configuration	DOE, SOE, 222/Flat, 222/Fin





LIQUID FILTER BAG

- Made from durable polypropylene, polyester, and nylon.
- High dirt-holding capacity for longer filtration cycles.
- Captures particles from 0.5 to 1200 microns.
- Handles flow rates of 1 to 1000 m³/hr.
- Reliable performance under high pressure.
- Low maintenance and cost-effective.



Filter Bags are designed for efficient filtration using a pressure-driven mechanism that forces liquids through the bag to remove particulate matter.

Made from durable materials like polypropylene, polyester, and nylon.

They are ideal for both fine and coarse filtration, handling flow rates from 1 to 1000 cubic meters per hour.

Suitable for industries such as water treatment, chemicals, food processing, Rubber Industries, Textile Industries Etc.

These bags provide reliable performance even under high pressure.

Configurations include single-bag units for basic applications and duplex or multi-bag housings for continuous or high-volume operations, ensuring flexibility and reliability in various industrial settings.





EVOLUTION OF MANUFACTURING TECHNOLOGY

1st Generation: Electromechanical Winding Machines

In our early stage, we launched our Electromechanical String Wound Filter Winding Machines capable of producing:

- Cartridge lengths from 5 inches to 70 inches
- Micron ratings from 0.5 μ to 100 μ .



Key Attributes:

- **MICRON ADJUSTMENT:**

Manual gear changes

- **TECHNOLOGY TYPE:**

Gear-based winding control

- **SUPPORTS CARTRIDGE TYPES :**

Slim and Jumbo (single-layer only)

- **MARKET RECEPTION:**

Highly regarded for reliability & versatility

- **LIMITATION:**

single layer winding only

This generation established the foundation for precision-wound filters and is now referred to as the **1st Generation Winding Technology.**





EVOLUTION OF MANUFACTURING TECHNOLOGY

2nd Generation: Electronic Ratio-Based Winding Machines

Building on our experience, we introduced
Electronic ratio based Winding Machines
featuring:

- **Cartridge Range:**
5" to 70" lengths, 0.5 μ to 100 μ micron
ratings



Key Attributes:

- **MICRON PATTERN CONTROL:**

Enter a **five-digit ratio** code via touchscreen (software calculated)

- **MECHANICAL SIMPLIFICATION:**

No manual gear adjustments.

- **USER INTERFACE:**

Intuitive digital control panel.

- **CARTRIDGE TYPES SUPPORTED:**

Slim and Jumbo (single-layer only).

- **LIMITATION:**

Still limited to single-layer cartridge winding.

This generation introduced
a software-driven approach to
pattern control and significantly
enhanced user convenience.





REVOLUTIONIZING WOUND FILTER CARTRIDGE PRODUCTION

**Crafted with innovation for
next-generation filtration**

- Advanced technology for precision & performance
- Efficient and reliable manufacturing
- Scalable solutions for diverse industries



Machine Type	Inline
Motor (RPM)	1400 RPM
Capacity (PCS/H)	35-50 according to cartridge length
Filter length	8.50 / 8.75 / 9.25 inch
Diameter range	Max 100mm
Filter precision	0.5-100micron
Raw material	Yarn (PP, Cotton etc) & Core (PP)
Voltage	1P/230V/50Hz





3rd Generation: SMARTWIND 360° Fully Automatic Multi-Layer Winding Machine

With a commitment to continuous innovation, MMP Filtration launched the SMARTWIND 360° a next-generation, fully automatic, multi-layer winding machine.



3 spindle



2 spindle

KEY FEATURES:

360° MULTI-LAYER WINDING:

Yarn winding from all angles, providing complete coverage and optimized layering.

ADVANCED PROGRAMMABILITY:

Precise rhombus pattern definition in axial and circumferential directions.

CUSTOM MICRON CONTROL:

Repeatable micron ratings through programmable yarn spacing and cartridge length.

STRUCTURAL & FUNCTIONAL BENEFITS:

- o Enhanced filtration depth through multiple layers
- o Improved mechanical strength
- o Superior bonding between layers





LAGOON[®]

MELT BLOWN FILTERS



**ENGINEERED FOR EXCEPTIONAL
FILTRATION, THERMAL STABILITY,
AND EXTENDED SERVICE LIFE**

- Suitable for Domestic purposes.
- Graded pore structure offers superior filtration.
- Extremely light weight with a seamless finish



Manufactured from materials which are listed for food contact applications in Title 21 CFR 177.1520 (Olefin Polymers) of the U.S. Code of Federal Regulations.

Technical Name	Melt Blown Filter Cartridges (Medium Density)
Raw Material	Virgin Polypropylene
ID	20-35mm±
OD	50-63mm± 1mm Jumbo 114± 2mm
Length	5"-50" 127mm to 1778mm
Microns	1-100μ
Construction	Polypropylene fibres are extruded through tiny perforations under pressure and high temperature on a rotating mandrel, forming three layers for gradient filtration
Flow	1m ³ per hour per 10" at pressure of 2.5Kg/cm ²
Temperature	Max. 60° C





OCEANIC[®]

MELT BLOWN FILTERS



**ENGINEERED FOR EXCEPTIONAL
FILTRATION, THERMAL STABILITY,
AND EXTENDED SERVICE LIFE**

- suited for fine particle filtration and coarse filtration.
- Compatible with a wide range of fluids, including water, chemicals, oils, and gases.
- Longer service life.



Manufactured from materials which are listed for food contact applications in Title 21 CFR 177.1520 (Olefin Polymers) of the U.S. Code of Federal Regulations.

Technical Name	Melt Blown Filter Cartridges (High Density)
Raw Material	Virgin Polypropylene
ID	20-35mm±
OD	40-114mm±
Length	5"-70" 127mm to 1778mm
Microns	0.5-100μ
Construction	Polypropylene fibres are extruded through tiny Perforations under pressure and high temperature on a rotating mandrel, forming three layers for gradient filtration.
Flow	1m ³ per hour per 10" at pressure of 3.5Kg/cm ²
Temperature	Max. 60° C





PYOORITE[®]

PLEATED FILTER CARTRIDGES

TAILORED FOR PURE WATER WITH PRECISE DESIGN

- Innovative construction ensures pure water consistently in a sleek, seamless 20-inch design.
- Customized precision with micron options ranging from 0.1 to 10μ.
- Constructed with premium virgin polypropylene.



Technical Name	PP Pleated Filter Cartridges
Raw Material	Virgin Polypropylene
ID	27 mm
OD	65 mm or as required by customer
Length	5" 10" 20" 30" 40" & 50"
Microns	0.1, 0.2, 0.45, 1, 2, 5 & 10μ
Construction	Inside and outside perforated core, In between pleated membrane filtration media.
Top & Bottom	DOE (Double open end) SOE (Single open end)
Flow	1m ³ per hour per 10" at pressure of 2.5kg/cm ²
Temperature	60° C





HIGH FLOW PLEATED FILTER CARTRIDGE

**HIGH FLOW RATE, AND ROBUST
CONSTRUCTION FOR OPTIMAL
PARTICLE CAPTURE.**

- Comes with a filtration area and versatile chemical compatibility
- High flow rate, coupled with robust construction for long-lasting durability.
- Optimal particle capture and has good dirt-holding capacity.



Application

Sea water desalination

Oil & Chemical

Food and Beverages

White Fuels

Process Water

Amine, Glycol

Power plant water treatment

Naphtha, HC Condensate

RO Guard Pre-filtration

Steel mill water treatment







RESIN BONDED FILTER CARTRIDGES

MRB SERIES

- High dirt-holding capacity
- Chemical-resistant resin bonded filters
- Strong, durable, and long-lasting
- Versatile for water treatment, pharma, food & beverage, and chemicals.



Cross-sectional view for
graded porosity of MRB series
resin bonded filter

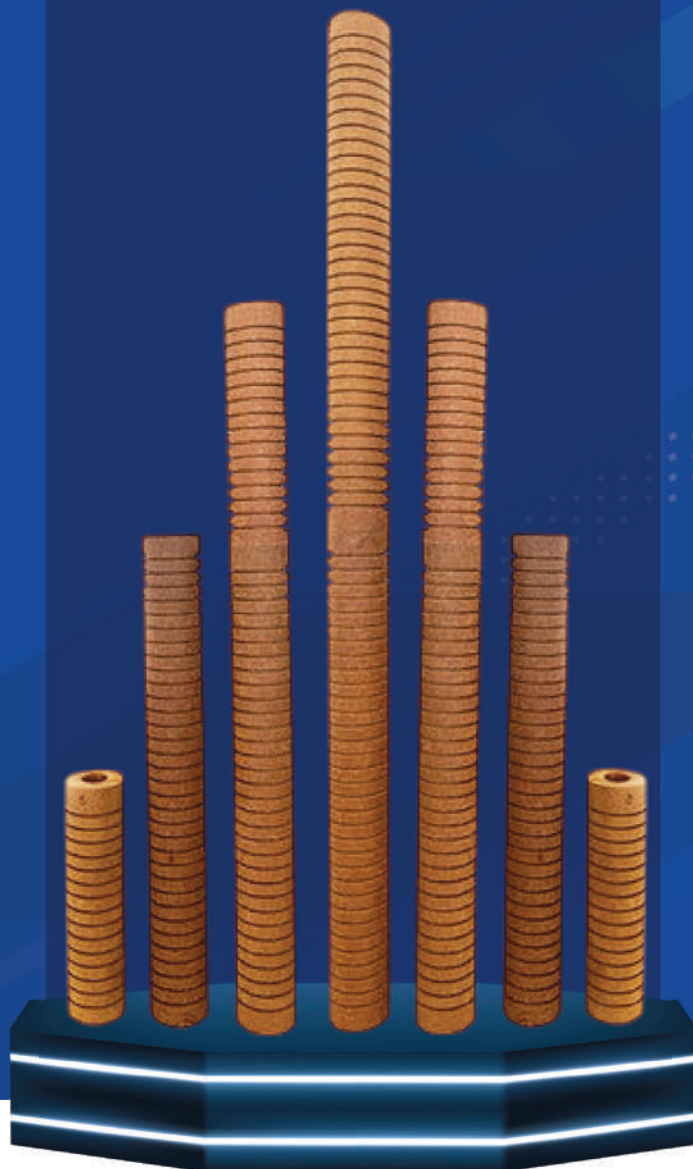

Operating Data*	RBF Series
Material	Phenolic Resin & Composite Fiber
Max Temperature	135°C
Operating Pressure	0.45MPa
Solvent Resistance	Expansion rate <2% (Ketones, Ethers, Phenols, Alcohols etc.)
Anti-shrinkage	No shrinkage and depression
Inner Diameter	29mm
Outer Diameter	63-65mm
Length	3.75 to 40 inch
Micro Rating	1, 5, 10, 25, 50, 75, 100, 125, 150, 200µm





RESIN BONDED FILTER CARTRIDGES

MAB SERIES

- Robust Structure
- High Dirt-Holding Capacity
- Varied Micron Ratings
- Chemical Resistance

Cross-sectional view for
Multi-layer of MAB Series
Resin Bonded filter



Operating Data*	MAB Series
Material	Phenolic Resin & Composite Fiber
Max Temperature	135°C
Operating Pressure	0.45MPa
Solvent Resistance	Expansion rate <2% (Ketones, Ethers, Phenols, Alcohols etc.)
Anti-shrinkage	No shrinkage and depression
Inner Diameter	29mm
Outer Diameter	63-65mm
Length	3.75 to 40 inch
Micro Rating	1, 5, 10, 25, 50, 75, 100, 125, 150, 200µm





PARTNERSHIP OPPORTUNITIES FOR EXCELLENCE IN WOUND POLYPROPYLENE FILTER CARTRIDGES

With over 30 years of experience, Hydro® Wound is a trusted name in the filtration industry. We are proud to be the only company in India that manufactures most of the necessary raw materials for wound filter cartridges. Our expertise and commitment to quality ensure that our products meet the highest standards.

Why Choose Hydro® Wound ?




In-House Manufacturing

We produce all essential components, including yarn, cores, wound filter cartridge machine and of course our Hydro® Wound cartridges too.



**DREF SPUN
YARN FOR
FILTRATION**

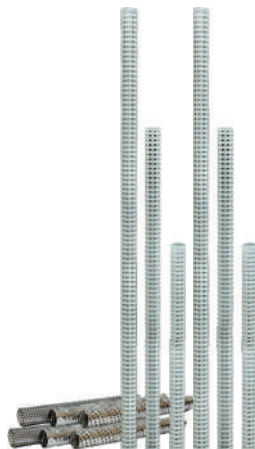

**PP CORE
FOR FILTER
CARTRIDGE**



**WINDING MACHINE
FOR WOUND
FILTER**



**HYDRO®
WOUND
FILTER
CARTRIDGE**



Customized Solutions

We offer customized solutions to meet specific filtration requirements.



Proven Track Record

Our long-standing presence in the market is a testament to our reliability and expertise.





Wound Filter Cartridges

Hydro® Wound polypropylene / Absorbent Bleached Cotton filter cartridges are designed for optimal performance and reliability. Our filters are ideal for various applications, including:



Water Treatment



Petroleum



Chemical



Pharmaceuticals



Food & Dairy

Key Features



Superior Filtration

Our filters provide exceptional dirt-holding capacity and high flow rates.



Durability

Made with high-quality polypropylene / Absorbent bleached cotton our cartridges are built to last.



Versatility

Suitable for a wide range of filtration needs, ensuring clean and safe operations.

Partnership Opportunities

Hydro® Wound offers more than just top-quality products. For businesses interested in manufacturing their own fully professional filter cartridges, we provide:

Raw Materials: High-grade yarn and cores.

Manufacturing Machines: State-of-the-art machinery for producing wound filter cartridges.

Technical Support: Comprehensive guidance and support to ensure successful production.



www.mmpfilter.com

mmp[®]

HIGH-PERFORMANCE
AIR FILTRATION
PRODUCTS WITH PRECISION ENGINEERING



PETROLEUM



CHEMICAL



PHARMACEUTICALS



FOOD & DAIRY



ENERGY



DESALINATION



www.mmpfilter.com



PLEATED FILTER BAGS

**DURABLE, COMPATIBLE, AND
OPTIMAL FOR VARIOUS
FILTRATION SYSTEMS.**

- Different fabric options with various coatings and flexible pleat depths.
- Compatible with various filtration systems.
- Made with durable materials.



Technical Name	Pleated Filter Bags
Fabric	Spun bonded: Polyester, Polypropylene, Aramid, PPS, PTFE Non woven: Polyester, Aramid, PPS, PTFE Coating
Coating	PTFE membrane lamination, Oil and Water repellent, Antistatic, Oil and water repellent + antistatic, PTFE coating
Pleats	16mm & 25mm (standard pleat depth) As required by the customer
Top & Bottom	Mild Steel, Galvanized Iron, Stainless steel, Polyurethane
Fitment suitable for cell plate diameter	130mm, 160mm, As required by the customer
Length	As required by customer





PLEATED FILTER CARTRIDGES

**LONG-LASTING PERFORMANCE,
SYSTEM COMPATIBILITY, AND
CUSTOMIZED SIZING**

- Pleatex Pleated Cartridges are offered in tailored fabric, coating, and pleat options for adaptable filtration solutions.
- Crafted for enduring performance and compatibility with various systems.
- Flexible fitment options and tailored sizing.



Technical Name	Pleated Cartridges
Fabric	Spun bonded, Polypropylene, Aramid (Nomex), PPS, PTFE, Cellulose
Coating on Fabric	PTFE membrane lamination, Oil and Water repellent Antistatic, Oil and water repellent + antistatic PTFE coating
Pleats	16mm – 48mm (standard pleats) As required by the customer
Top & Bottom	SS, Aluminium, MS
Fitment	3 lugs/Din/PCD type Loading from top or from bottom as required
Length	3 Lug: 150, 222 & 325mm size Din Type Size: as required by the customer PCD Type Size: as required by customer
OD	3 Lug: 150, 222 & 325mm size Din Type Size: as required by the customer PCD Type Size: as required by customer
ID	According to OD
Length	As required by customer





M-TEX

DUST COLLECTOR BAGS

CUSTOMIZABLE EFFICIENCY, TAILORED FILTRATION WITH VERSATILE FABRICS, FITMENT OPTIONS, AND LENGTH CUSTOMIZATION.

- Efficient Dust Capture with Variable coatings.
- Offering a variety of fabrics for tailored filtration.
- It can be modified as per customer requirements and applications.



Technical Name	Non Woven Dust Collector bags Woven Dust Collector bags
Fabric	Polyester, Meta-aramid (Nomex), Acrylic homopolymer, Acrylic co-polymer, Polyphenylene Sulphide (PPS), Polyimide (P84), Glass Fibre, Polypropylene, PTFE
Coating on Fabric	Oil and water repellent, Antistatic, Oil and water repellent + antistatic PTFE coating, PTFE membrane lamination
Fitment	Snap Band/Collar/Rope type
Joint	Stitching/Heat Sealing
ID & OD	As required by the customer
Length	As required by the customer






CAGES

FOR DUST COLLECTOR FILTER BAGS

**HIGH-END CAGES MANUFACTURED
WITH PRECISION, VARIABLE CONFIGURATIONS,
AND ROBUST SUPPORT GRIDS.**

- Offer material options like Mild Steel, Stainless Steel, and Galvanized Iron for diverse filtration conditions.
- Variable rods and rings meet unique filtration requirements.
- Support grids & diverse Venturi options like Stainless Steel, Galvanized Iron, Cast Iron, and Aluminium.
- Automatic Welding

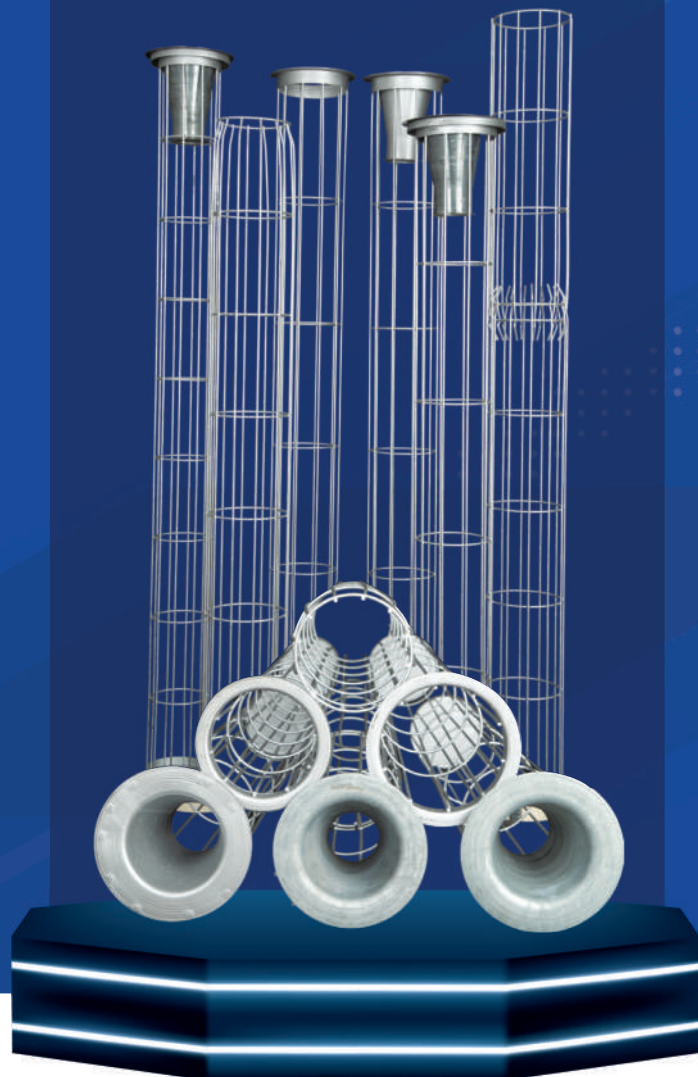

MOC	MS SS GI
No. of Rods	As required by the customer
No. of Rings	As required by the customer
Thickness of wire	3mm to 4mm
Venturi MOC	SS, GI, Cast Iron, Aluminium
Length	As required by the customer





HIGH-PERFORMANCE
AIR FILTRATION
PRODUCTS WITH PRECISION ENGINEERING



**DIN
FILTER CARTRIDGE WITH
OUTER EXPANDABLE**




**DIN
CARTRIDGE FILTER**



**DIN
CARTRIDGE FILTER**




**PU
PLEATED BAG**




**DIN
COLLAR FILTER
CARTRIDGE**



**M-TEX DUST
COLLECTOR BAGS**

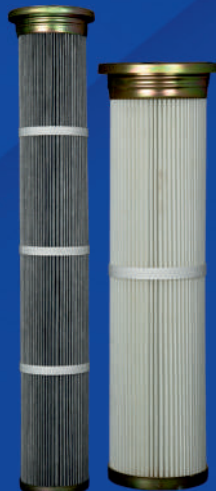

**PLEATED
FILTER BAGS**

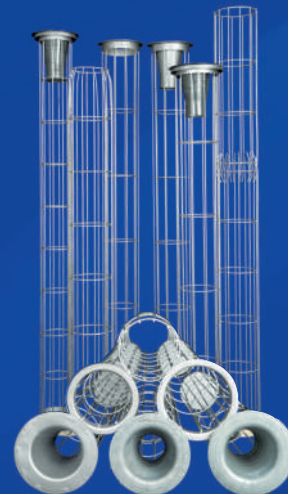


**CAGES FOR DUST
COLLECTOR FILTER BAGS**



HIGH-PERFORMANCE
AIR FILTRATION
PRODUCTS WITH PRECISION ENGINEERING



**TENKAY
CARTRIDGE FILTER**

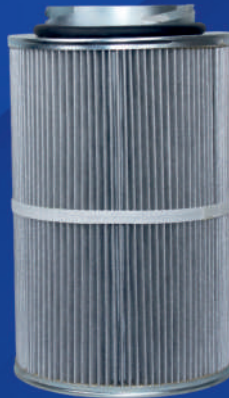


**BAYONET FILTER
CARTRIDGE**



**STANDARD FILTER
CARTRIDGE**



**STANDARD FILTER
CARTRIDGE**

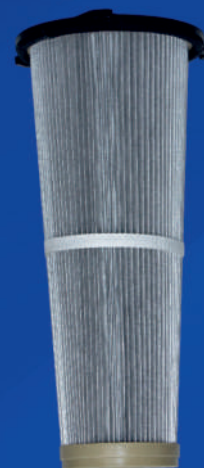

**STANDARD FILTER
CARTRIDGE CONICAL**


mmp[®]

POLYPROPYLENE HOMOPOLYMER FILTER HOUSING





Polypropylene Homopolymer Filter Housing

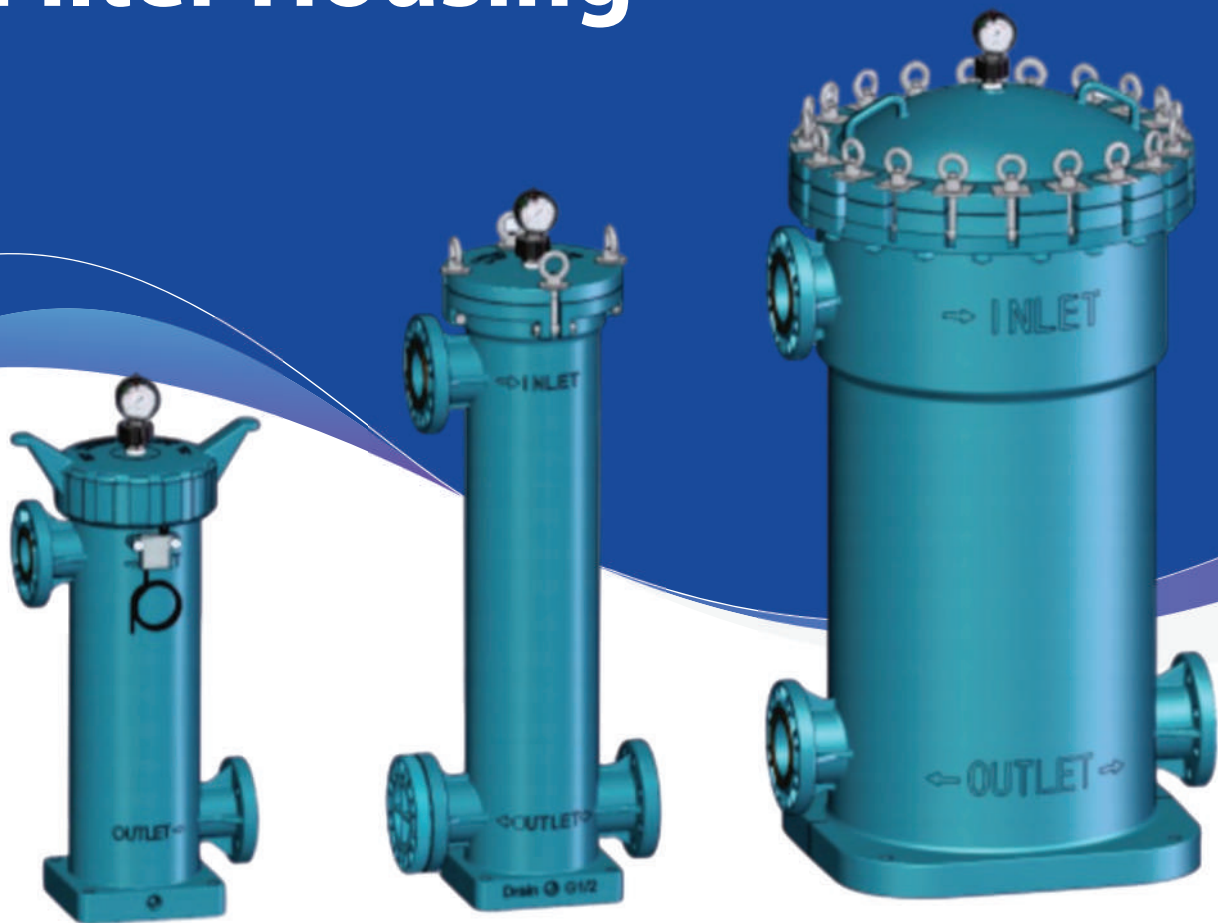

Polypropylene Homopolymer filter housing make up for the unsuitable use of stainless steel housings. Because in the filtration of strong acids and alkalis and strong corrosive liquids, stainless steel filter housing cannot be used, so polypropylene homopolymer cartridge filter housing has their remarkable superior performance. The polypropylene homopolymer housing is one-piece injection molding, no seams, no dead ends, easy to clean, good sealing, with strict leak proof design, the filtrate will not bypass, not leak, suitable for installing various depth filter elements, it has good filtration effect and long service life. Polypropylene homopolymer filter housing is a high quality, high efficiency, economical and practical excellent filtration system.



Features

- All-match international standard for inlet and outlet flanges.
- No effusion: smooth interior and good sealing design, no residual liquid in the filter.
- High pressure resistance maximum working pressure 8 bar, working temperature 90°C.
- Good sealing: all the sealing rings are made of fluorine rubber, which makes the corrosion resistance better.
- Conventional operation: quick opening and easy installation and disassembly, easy to replace filter element consumables.
- Acid and alkali resistance suitable for 30% concentration of hydrochloric acid less than 80% concentration of sulfuric acid.
- Seamless barrel: The housing and flanges are injection molded at one time, without seams, with a smooth appearance and no leakage points.

Specifications

Housing Materials	Polypropylene Homopolymer
Housing direction	Vertical
Depth filter type	String Wound Cartridge Melt Blown Cartridge Pleated Cartridge Filter Bags High flow Cartridge
Housing Thickness	16 mm, 22 mm
Connection	Side port, Bottom port
Inlet/ Outlet Type	Flange
Inlet/Outlet Size	DN40, DN50, DN65, DN80 DN100
Sealing Type	Screwing cap type, Swing bolt type
Seal material	Viton

Applications



PCB
Industry



Metal
Plating



LED
Equipment



Potion
Processing



Chemical
Industry



Inks &
Coatings



Sewage
Treatment



Acid base
Solution Filtration



Desalination
Plant




mmp® Bag Filter Series

MMP-B 1.5 -TS
MMP-B2-RF



MMP-B1-TS

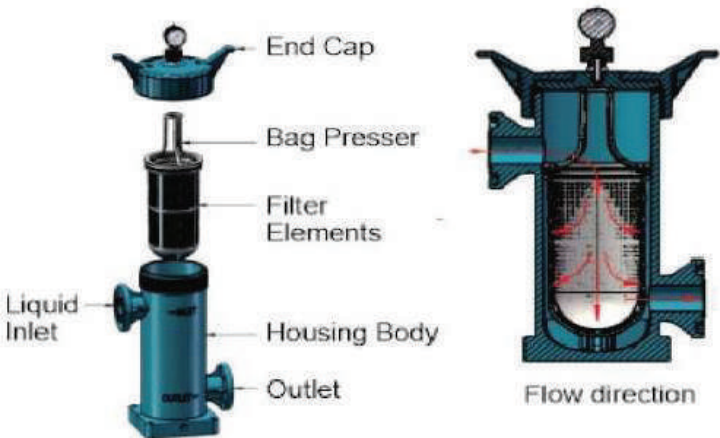


Specifications

Bag Filter Assembly


Model	MMP-B1-TS	MMP-B 1.5 -TS	MMP-B2-RF
Description	7/16 Filter Bag Assembly	7/22 Filter Bag Assembly	7/32 Filter Bag Assembly
Material	Polypropylene Homopolymer	Polypropylene Homopolymer	Polypropylene Homopolymer
Max. Flow (m³/h)	15 m³/h	20 m³/h	25 m³/h
Inlet/Outlet (mm)	DN 50mm/2 inch	DN 65mm/2.5 inch	DN 80mm/3 inch
Design Pressure (MPa)	0.8	0.8	0.8
Max. Temperature (°C)	90	90	90
Compatible Elements	Bag Filter 7"x16"	Bag Filter 7"x22"	Bag Filter 7"x32"
Element Size. Quantity	180*410mm.1pcs	180*560mm .1pcs	180*810mm .1pcs

Filter Housing Measure Guide


MMP-B1-TS

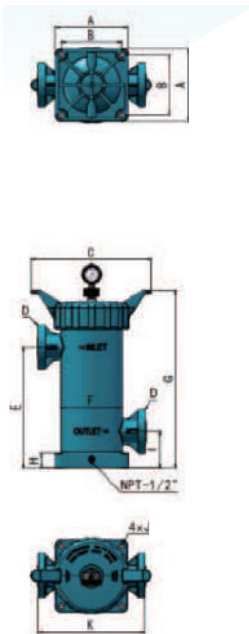

MMP-B 1.5 -TS

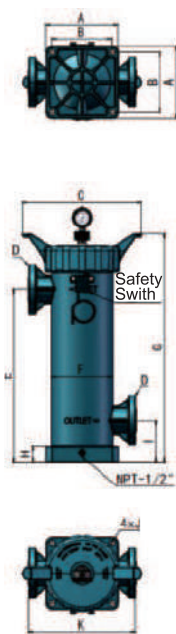

MMP-B2-RF

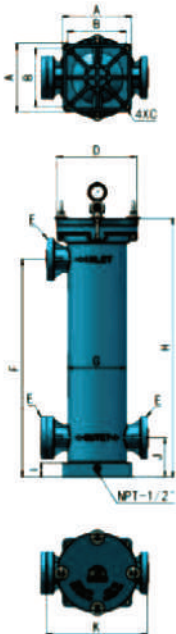


Model	A	B	C	D	E	F	G	H	I	J	K
MMP-B1-TS	265	222	440	50	447	230	657	56	135	19	395
MMP-B 1.5 -TS	265	222	440	65	636	230	850	56	153	19	395
MMP-B2-RF	265	226	19	310	50	850	230	1010	56	155	395



mmp® Multi Bag Filter Series


(mmp® MBF Series)

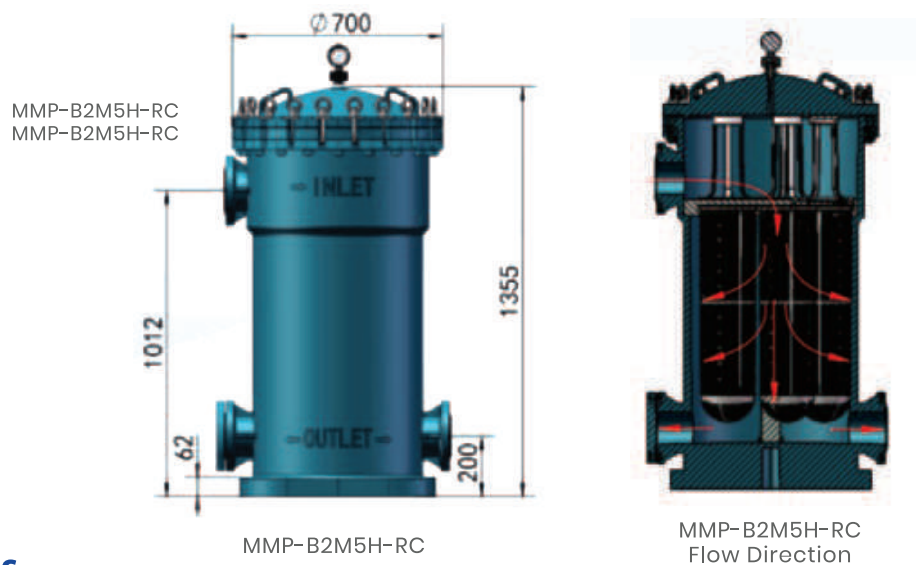

Specifications

Model	MMP-B2M5H-RC	MMP-B2M5H-RC
Description	7/32 Filter Bag Assembly	7/32 Filter Bag Assembly
Material	Polypropylene Homopolymer	Polypropylene Homopolymer
Max. Flow (m³/h)	80 m³/h	180 m³/h
Inlet/Outlet (mm)	DN 100mm/4 inch	DN 150mm/6 inch
Design Pressure (MPa)	0.8	0.8
Max. Temperature (°C)	80	80
Compatible Elements	Bag Filter 7"x32"	Bag Filter 7"x32"
Element Size, Quantity	180*810 mm,5pcs	180*810 mm,5pcs

Filter Housing Measure Guide

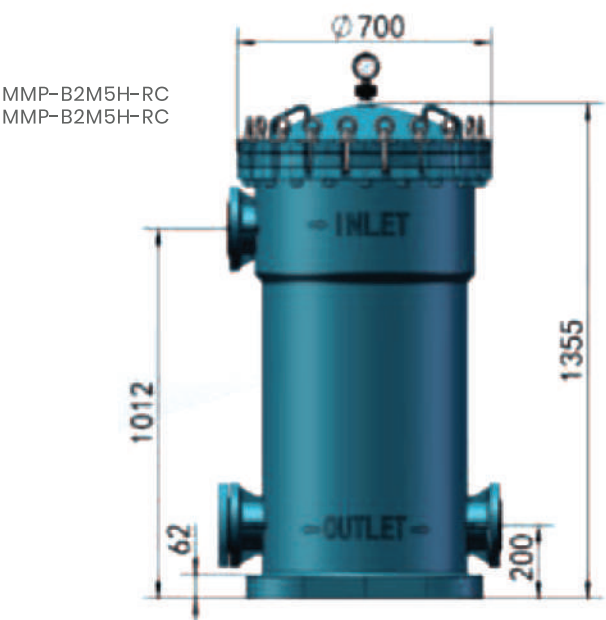


Model	A	B	C	D	E	F	G	H	I	J	K
MMP-B2M5H-RC	652	525	700	100	1012	565	1355	62	200	22	753
MMP-B2M5H-RC	652	525	700	150	1012	565	1355	62	200	22	753



mmp® High Flow Series


(mmp® HF Series)

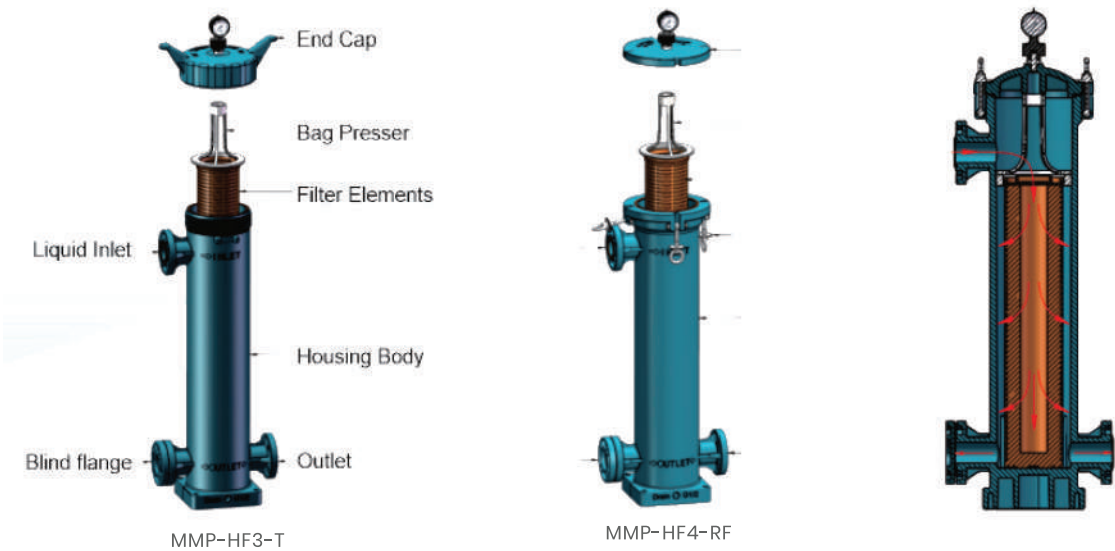

Specifications

Model	MMP-HF3-T	MMP-HF4-RF
Description	6/30 High Flow	6/40 High Flow
Material	Polypropylene Homopolymer	Polypropylene Homopolymer
Max. Flow (m³/h)	50 m³/h	35 m³/h
Inlet/Outlet (mm)	DN 80mm/3 inch	DN 65mm/2,5 inch
Design Pressure (MPa)	0.8	0.8
Max. Temperature (°C)	90	90
Compatible Elements	Pall High Flow Filter	Pall High Flow Filter
Element Size. Quantity	152*762 mm.1pc	152*1016 mm.1pc

Filter Housing Measure Guide

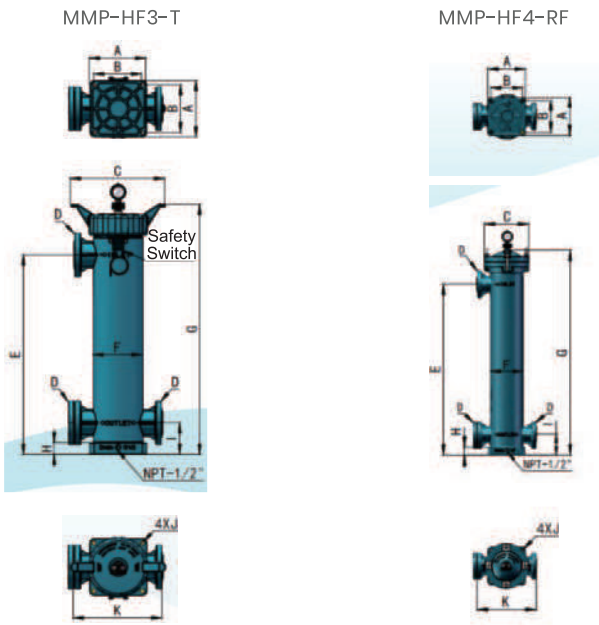


Model	A	B	C	D	E	F	G	H	I	J	K
MMP-HF3-T	265	225	440	80	940	230	1175	56	148	19	415
MMP-HF4-RF	265	225	310	65	1188	230	1420	56	140	19	412



mmp® Multi High Flow Series


(mmp® MHF Series)

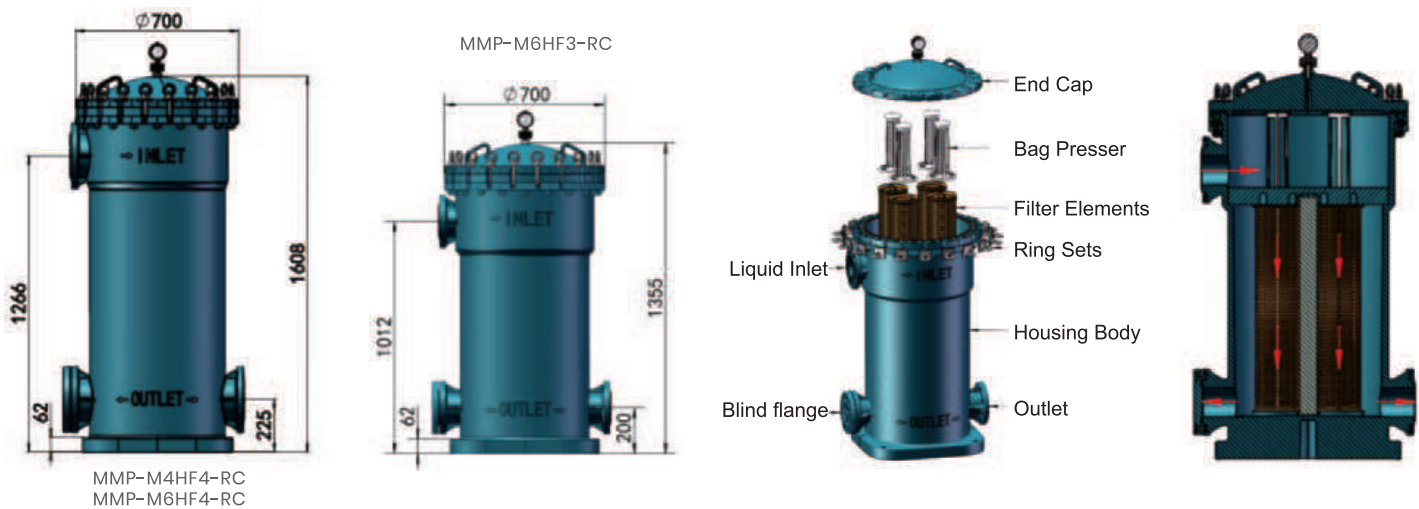

Specifications

Model	MMP-M6HF3-RC	MMP-M4HF4-RC	MMP-M6HF4-RC
Description	6" / 30" High Flow 6 High Flow Filter Cartridge	6" / 40" High Flow 4 High Flow Filter Cartridge	6" / 40" High Flow 6 High Flow Filter Cartridge
Material	Polypropylene Homopolymer	Polypropylene Homopolymer	Polypropylene Homopolymer
Max. Flow (m³/h)	80 m³/h	180 m³/h	180 m³/h
Inlet/Outlet (mm)	DN 100mm/4 inch	DN 150mm/6 inch	DN 150mm/6 inch
Design Pressure (MPa)	0.8	0.8	0.8
Max. Temperature (°C)	90	90	90
Compatible Elements	Pall High Flow Filter	Pall High Flow Filter	Pall High Flow Filter
Element Size. Quantity	152*762 mm.6pcs	152*1016 mm.4pcs	152*1016 mm.6pcs

Filter Housing Measure Guide

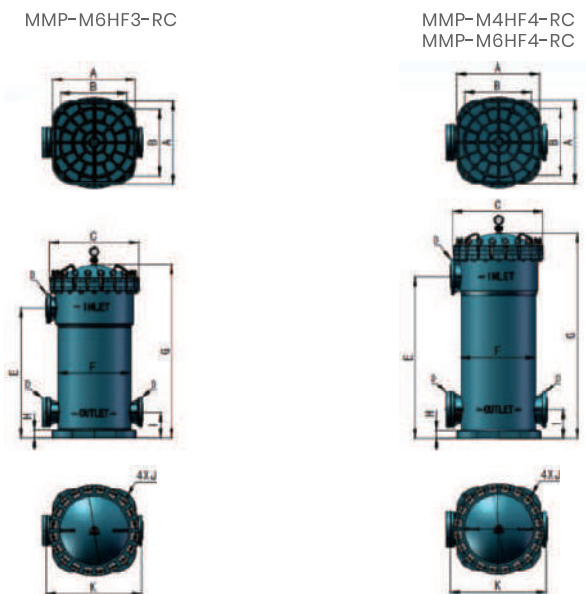


Model	A	B	C	D	E	F	G	H	I	J	K
MMP-M6HF3-RC	652	525	700	100	1032	565	1355	62	200	22	753
MMP-M4HF4-RC	652	525	700	150	1266	582	1608	62	225	22	753
MMP-M6HF4-RC	652	525	700	150	1266	582	1608	62	225	22	753



mmp® DOE Series


MMP-C1M5-T-DOE MMP-C3-M5-T-DOE
MMP-C2-M5-T-DOE MMP-C4M5-RF-DOE

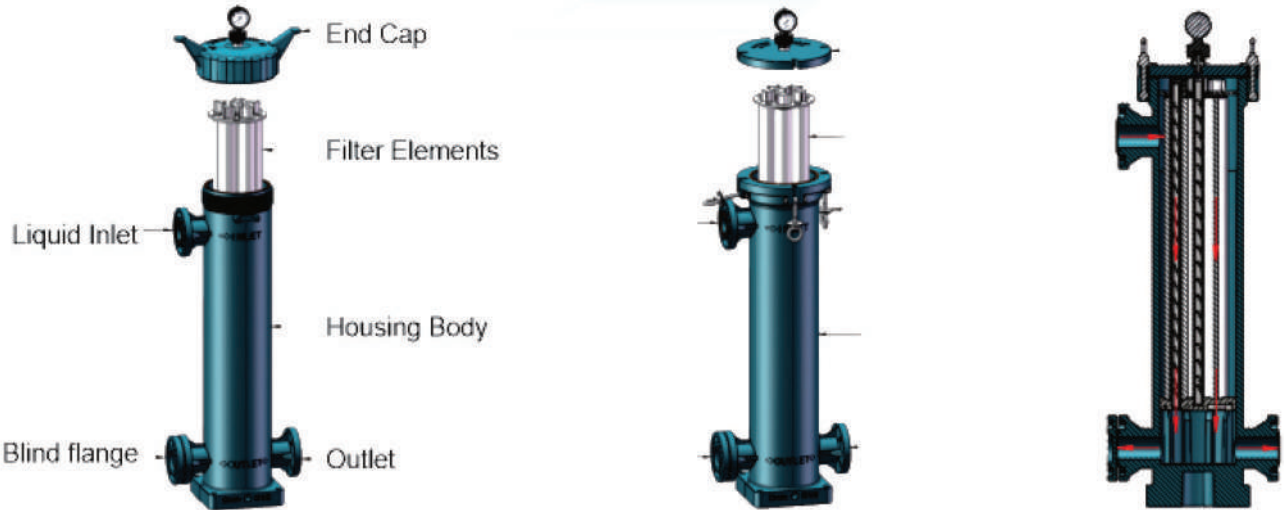

Specifications

Model	MMP-C1M5-T-DOE	MMP-C2-M5-T-DOE	MMP-C3M5-T-DOE	MMP-C4M5-RF-DOE
Description	DOE 5 Element 10"	DOE 5 Element 20"	DOE 5 Element 30"	DOE 5 Element 40"
Material	Polypropylene Homopolymer	Polypropylene Homopolymer	Polypropylene Homopolymer	Polypropylene Homopolymer
Max. Flow (m³/h)	5 m³/h	10 m³/h	15 m³/h	20 m³/h
Inlet/Outlet (mm)	DN 50mm/2 inch	DN 65mm/2.5 inch	DN 65mm/2.5 inch	DN 80mm/3 inch
Design Pressure (MPa)	0.8	0.8	0.8	0.8
Max. Temperature (°C)	90	90	90	90
Compatible Elements	DOE Cartridge 5 Element 10 Inch Filter Housing	DOE Cartridge 5 Element 20 Inch Filter Housing	DOE Cartridge 5 Element 30 Inch Filter Housing	DOE Cartridge 5 Element 40 Inch Filter Housing
Element Size. Quantity	68*254 mm.5pcs	68*508 mm.5pcs	68*762 mm.5pcs	68*1016 mm.5pcs

Filter Housing Measure Guide

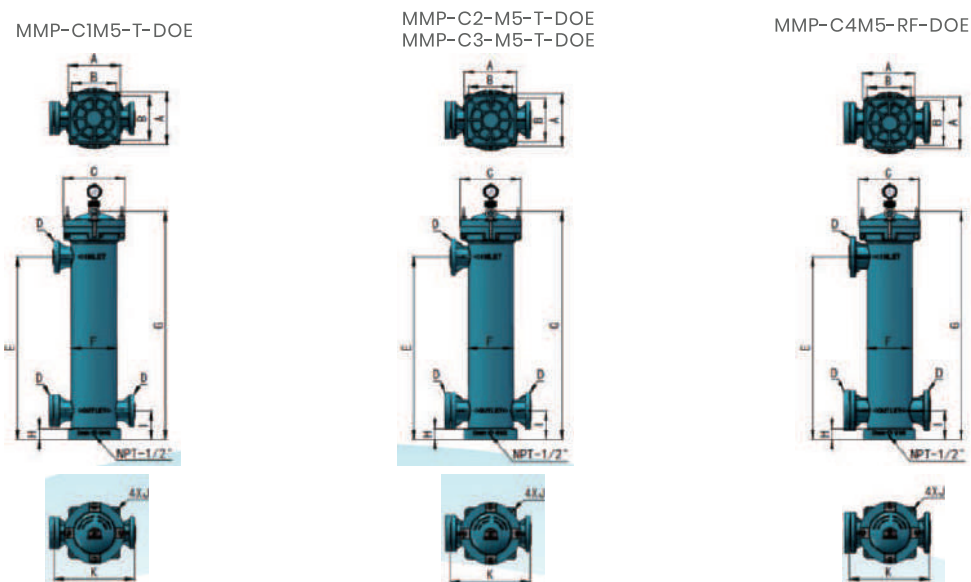

Model	A	B	C	D	E	F	G	H	I	J	K
MMP-C1M5-T-DOE	265	225	440	50	447	230	657	56	135	19	315
MMP-C2-M5-T-DOE	265	222	440	50	865	230	1085	56	148	19	392
MMP-C3-M5-T-DOE	265	225	440	65	940	230	1175	56	148	19	415
MMP-C4M5-RF-DOE	265	225	310	65	1188	230	1420	56	140	19	412




mmp® Multi Filter Cartridges Series

(mmp® MHF Series)

MMP-B4MC25-RC
MMP-B4MC30-RC

MMP-B3MC25-RC
MMP-B3MC30-RC

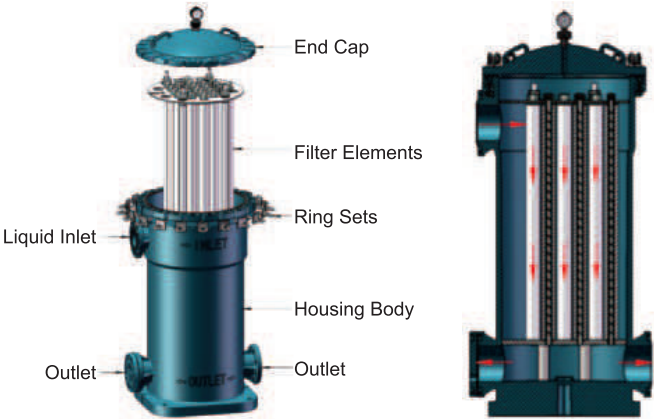


Specifications


Model	MMP-B3MC25-RC	MMP-B3MC30-RC	MMP-B4MC25-RC	MMP-B4MC30-RF
Description	DOE 25 Element 30" Multi Cartridge Assembly	DOE 30 Element 30" Multi Cartridge Assembly	DOE 25 Element 40" Multi Cartridge Assembly	DOE 30 Element 40" Multi Cartridge Assembly
Material	Polypropylene Homopolymer	Polypropylene Homopolymer	Polypropylene Homopolymer	Polypropylene Homopolymer
Max. Flow (m³/h)	40 m³/h	45 m³/h	75 m³/h	90 m³/h
Inlet/Outlet (mm)	DN 100mm/4 inch	DN 100mm/4 inch	DN 150mm/6 inch	DN 150mm/6 inch
Design Pressure (MPa)	0.8	0.8	0.8	0.8
Max. Temperature (°C)	90	90	90	90
Compatible Elements	DOE Cartridge 25 Element 30 Inch Filter Housing	DOE Cartridge 30 Element 30 Inch Filter Housing	DOE Cartridge 25 Element 40 Inch Filter Housing	DOE Cartridge 30 Element 40 Inch Filter Housing
Element Size, Quantity	68*762 mm,25pcs	68*762 mm,30pcs	68*1016 mm,25pcs	68*1016 mm,30pcs

Filter Housing Measure Guide

MMP-B3MC25-RC
MMP-B3MC30-RC

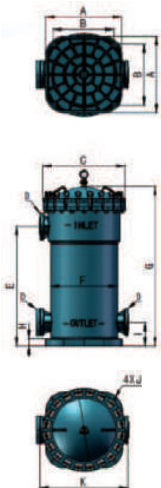


MMP-B4MC25-RC
MMP-B4MC30-RC

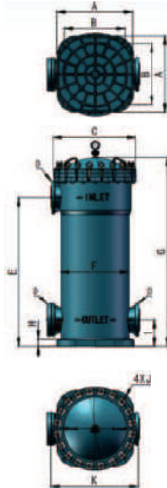

Model	A	B	C	D	E	F	G	H	I	J	K
MMP-B3MC25-RC	652	525	700	100	1012	565	1355	62	200	22	753
MMP-B3MC30-RC	652	525	700	100	1012	565	1355	62	200	22	753
MMP-B4MC25-RC	652	525	700	150	1266	582	1608	62	225	22	753
MMP-B4MC30-RC	652	525	700	150	1266	582	1608	62	225	22	753




mmp® SOE Series

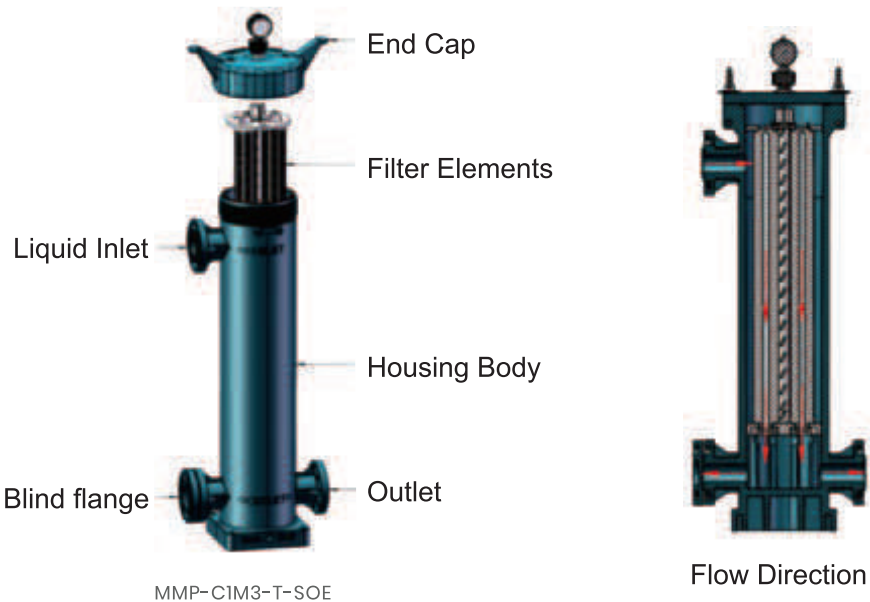

Specifications

Model	MMP-C1M3-T-SOE
Material	SOE 3 Element 10"
Max. Flow (m³/h)	2.5 m³/h
Inlet/Outlet (mm)	DN 50mm/2 inch
Design Pressure (MPa)	0.8
Max. Temperature (°C)	90
Compatible Elements	SOE (222/FIN) PP Pleated 3 Element 10 Inch
Element Size. Quantity	68*254 mm.3pcs

Filter Housing Measure Guide

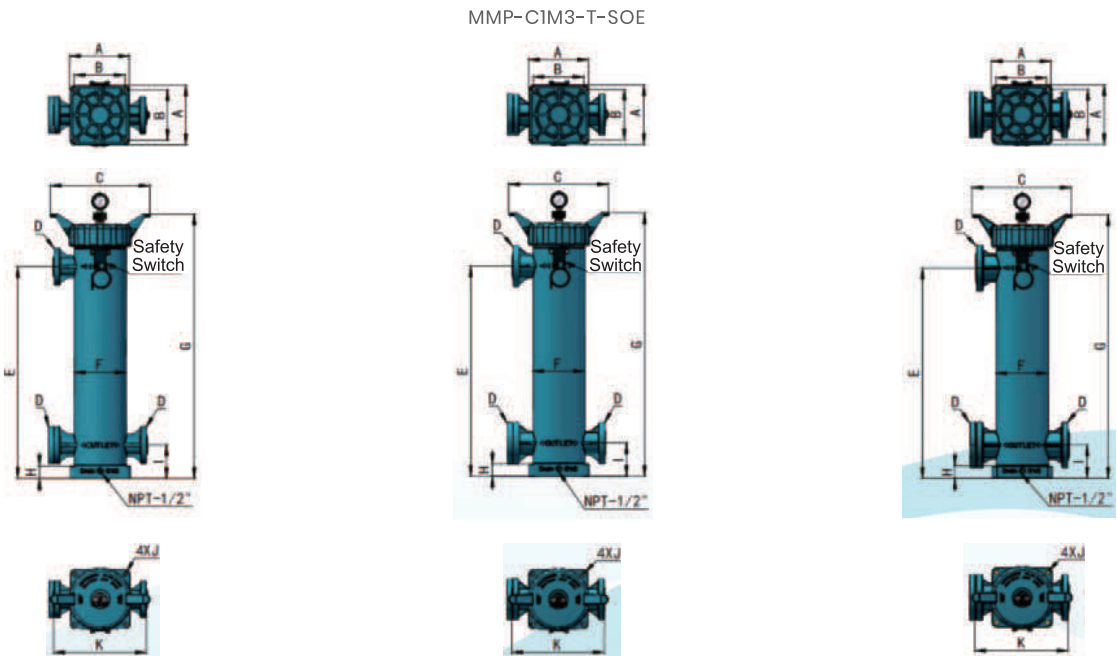

Model	A	B	C	D	E	F	G	H	I	J	K
MMP-C1M3-T-SOE	265	225	440	50	940	230	1175	56	148	19	415





ADVANTAGE

- 1 The filter housing is Integrated molded, with a sturdy structure. Safe and reliable, easy to install and no welding. High temperature, high pressure and corrosion resistance
- 2 The integrated national standard flange and bolt hole spacing are multifunctional, compatible with national, American, Japanese, and German standard flanges, easy to install, and sealed without leakage
- 3 Fluororubber sealing ring has high temperature resistance and is suitable for most acidic and alkaline solutions, thereby saving accessories and consumables and reducing consumable costs
- 4 The filter basket is integrally formed, and the outer surface of the mesh basket is designed with uniformly distributed and orderly arranged protruding solid square columns, enhancing the compressive strength of the filter basket

Office Address

C3-602 Anushruti Tower, SG Road, Thaltej,
Ahmedabad – 380059 Gujarat, India

Contact

+91 98300 30030
+91 77388 23434

Email

ntodi@mmpfilter.com
mumbai@mmpfilter.com