


HIGH FLOW PLEATED FILTER CARTRIDGE

mmp[®]

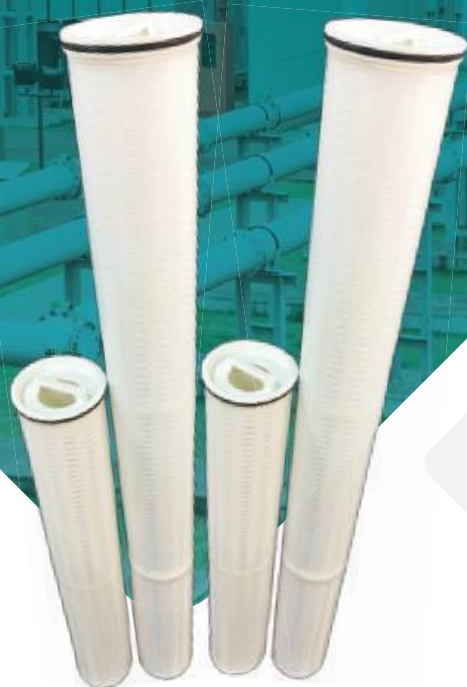

High performance with High-flow pleated filters

mmp manufactures some of the industry's most durable and effective high-flow pleated filters, designed to maximize filtration surface area through pleating and efficiently capture particles from liquids. The increased surface area enhances the filter's ability to trap contaminants, ensuring effective filtration.

Constructed from materials like polypropylene, a durable and effective filtering material, the filter material is pleated and folded to increase the available surface area for filtration. Shaped into a cylindrical form, the pleated material creates a structure that maximizes the filtration surface area. The ends of the cylindrical filter are sealed to ensure that all fluid passing through the filter goes through the pleated material, preventing bypass and ensuring efficient filtration.

A support structure, often made of sturdy materials, is integrated into the filter to maintain its shape and structural integrity, ensuring it can handle high-flow rates without collapsing. High-flow pleated filters are available in various micron ratings, determining filtration precision. Boasting a large filtration area of up to 9m², the filter efficiently captures particles.

With a high flow rate of up to 113m³/hr or 500GPM, it processes large fluid volumes rapidly. The inner core provides robust mechanical support even under high-pressure conditions. The outer cage adds an extra layer of durability, making the filter resilient in challenging environments. Equipped with end connections that seamlessly fit standard configurations, it's easy to integrate into existing systems.

These filter cartridges are designed to meet specific filtration needs, with applications spanning industries such as seawater desalination, oil and chemical, food and beverages, white fuels, process water, amine, glycol, power plant water treatment, naphtha, HC condensate, RO guard pre-filtration, and steel mill water treatment. The removal of particles, contaminants, and impurities from liquids is crucial for ensuring the overall quality and efficiency of processes in these industries.

USE OF PRODUCT IN VARIOUS INDUSTRIES



PETROLEUM



CHEMICAL



PHARMACEUTICALS



FOOD & DAIRY



METALLURGY



CEMENT




ENERGY

HIGH FLOW PLEATED FILTER CARTRIDGE

mmp®

APPLICATION

- Sea water desalination
- Food and Beverages
- Electronic and Semi-Conductor
- Water Treatment
- Oil & Chemical
- Machinery & Equipment
- Power plant water treatment
- Steel mill water treatment

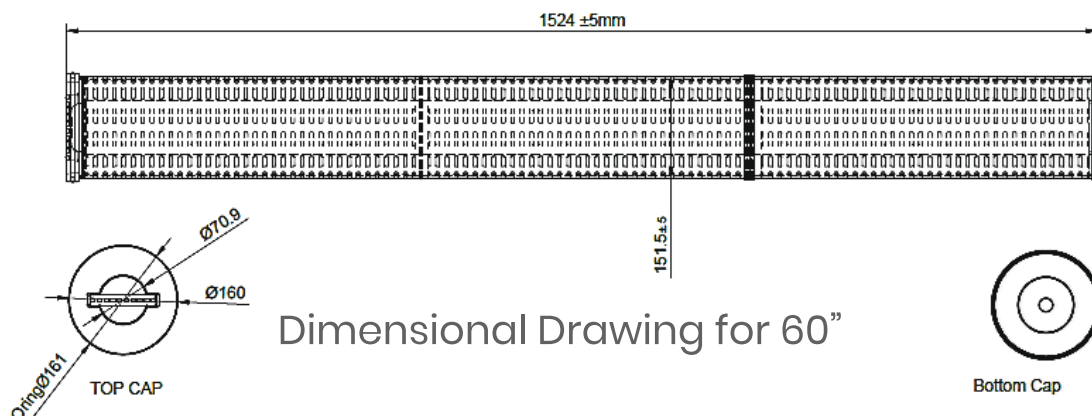


MATERIAL OF CONSTRUCTION

Media	Polypropylene micro fibre	Endcaps	Polypropylene
Support Media	Polypropylene	Gaskets / O-rings	EPDM, Nitrile,
Inner and Outer Core	Polypropylene		Viton®, Silicone

TECHNICAL SPECIFICATION

Lengths:	60/40/20inch	Micron Rating	1, 05, 10, 20, 30, 40 µm
Outside diameter:	Ø 6" (152mm)	Max DPA	50 psid at 180°F (3.4bar at 82°C)
Typical surface Area:	9 m ² @60inch, 6 m ² @40inch	Recommended Change out DPA	2.4bar
Dirt Holding capacity (60")	3 to 5 kg (considering RO pre-filter)	Max Flow per Cartridge (60")	1300 LPM

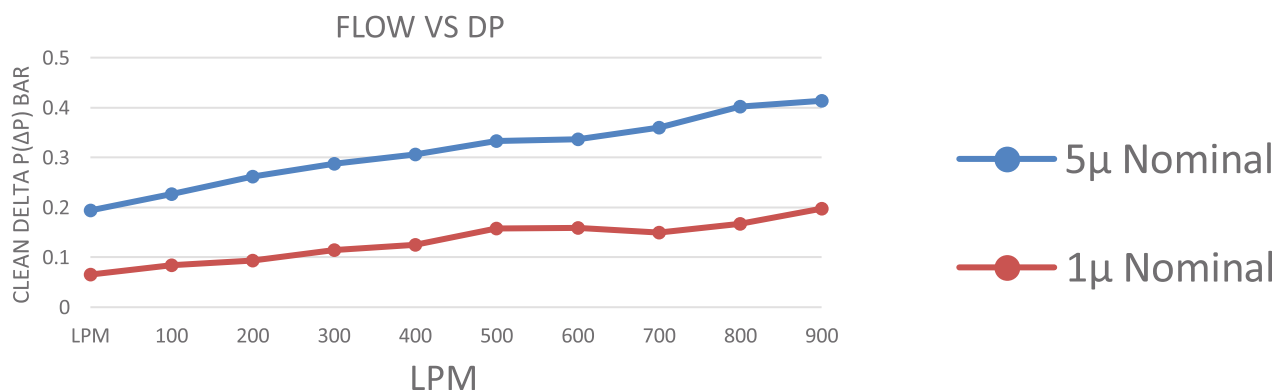

Office Address:

C3-602 Anushruti Tower, SG Road, Thaltej,
Ahmedabad – 380059 Gujarat, India

Contact:

+91 70437 45709
+91 98300 30030

Email

ahmd-sales@mmpfilter.com
ntodi@mmpfilter.com