



HIGH-PERFORMANCE  
**WATER FILTRATION**  
PRODUCTS WITH PRECISION ENGINEERING



PETROLEUM



CHEMICAL



PHARMACEUTICALS



FOOD & DAIRY



WATER TREATMENT



ENERGY



DESALINATION

[www.mmpfilter.com](http://www.mmpfilter.com)

# INDEX

| SR. NO. | PRODUCTS                                    | PAGE NO. |
|---------|---------------------------------------------|----------|
| 01      | About Us                                    | 03       |
| 02      | DREF Spinning Yarn                          | 04       |
| 03      | Lagoon Melt Blown Filters                   | 05       |
| 04      | Hydro Wound Filter Cartridge                | 06       |
| 05      | Oceanic Melt Blown Filter                   | 07       |
| 06      | PP Core for Filter Cartridge                | 08       |
| 07      | Pyoorite Pleated Filter Cartridges          | 09       |
| 08      | High Flow Pleated Filter Cartridge          | 10       |
| 09      | Winding Machine for Wound Filter            | 11       |
| 10      | Polypropylene Homopolymer Filter Housing    | 12       |
| 11      | Resin Bonded Filter Cartridges - MAB Series | 13       |
| 12      | Resin Bonded Filter Cartridges - MRB Series | 14       |
| 13      | Certificates                                | 15       |





# ABOUT US

**mmp** is on a mission to make daily life better with practical cleaning solutions for air and water. We're proud pioneers in India, making top-notch water and air filters and dust bags in our advanced plants in Kolkata, Mumbai, Chennai, and Ahmedabad. We know the whole process, from design to production, to ensure quality filters that meet global standards.

We're the first in India to design NSF-certified melt-blown filters, for our strong commitment to quality. We keep things simple and effective, making our filters efficient and accessible to every industry. Presenting our brochure for Liquid Filtration Cartridges & Products.

Our strong supply chain gets our products all over India & Abroad smoothly. With offices in Kolkata, Mumbai, Chennai, and Ahmedabad, we're here to help businesses upgrade their filtration system.

## DREF SPINNING YARN

**UNMATCHED STRENGTH & EFFICIENCY  
WITH HIGH ABSORPTION YARN.**

- Uniform breaking strength along the entire length.
- High dirt holding capacity.
- Low flow resistance.
- High filtration efficiency and life of the filter.



### Technical Specification

|                     |                                                   |
|---------------------|---------------------------------------------------|
| Fiber               | Polypropylene / Polyester                         |
| Spinning Technology | Dref friction spun yarn count of yarn: 0.4-1.0 Ne |
| Core Spun Yarn      | Multifilament yarn in the core                    |
| Fiber Denier        | 1.4-6 Denier                                      |
| Package Size        | 4.5-6.5 kg/spool                                  |



## HYDRO WOUND<sup>®</sup> FILTER CARTRIDGE

**WOVEN FOR PURITY,  
ENGINEERED FOR BRILLIANCE**

- Best Quality Yarn wound with High Precision.
- Higher Dirt Holding Capacity
- Increases life and efficiency of the filter.



### Technical Specification

|                     |                                                      |
|---------------------|------------------------------------------------------|
| Raw Material        | Polypropylene / Polyester / Cotton                   |
| Spinning Technology | DREF friction spun yarn count<br>of yarn: 0.4-1.0 Ne |
| Core Spun Yarn      | PP, SS, tinned steel                                 |

## LAGOON<sup>®</sup> MELT BLOWN FILTERS



**ENGINEERED FOR EXCEPTIONAL  
FILTRATION, THERMAL STABILITY,  
AND EXTENDED SERVICE LIFE**

- Suitable for Domestic purposes.
- Graded pore structure offers superior filtration.
- Extremely light weight with a seamless finish



| Technical Name | Melt Blown Filter Cartridges (Medium Density)                                                                                                                       |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Raw Material   | Virgin Polypropylene                                                                                                                                                |
| ID             | 20-35mm±                                                                                                                                                            |
| OD             | 50-63mm± 1mm Jumbo 114± 2mm                                                                                                                                         |
| Length         | 5"-50" 127mm to 1778mm                                                                                                                                              |
| Microns        | 1-100μ                                                                                                                                                              |
| Construction   | Polypropylene fibres are extruded through tiny perforations under pressure and high temperature on a rotating mandrel, forming three layers for gradient filtration |
| Flow           | 1m <sup>3</sup> per hour per 10" at pressure of 2.5Kg/cm <sup>2</sup>                                                                                               |
| Temperature    | Max. 60° C                                                                                                                                                          |



## OCEANIC<sup>®</sup> MELT BLOWN FILTERS



**ENGINEERED FOR EXCEPTIONAL  
FILTRATION, THERMAL STABILITY,  
AND EXTENDED SERVICE LIFE**

- suited for fine particle filtration and coarse filtration.
- Compatible with a wide range of fluids, including water, chemicals, oils, and gases.
- Longer service life.



| Technical Name | Melt Blown Filter Cartridges (High Density)                                                                                                                          |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Raw Material   | Virgin Polypropylene                                                                                                                                                 |
| ID             | 20-35mm±                                                                                                                                                             |
| OD             | 40-114mm±                                                                                                                                                            |
| Length         | 5"-70" 127mm to 1778mm                                                                                                                                               |
| Microns        | 0.5-100μ                                                                                                                                                             |
| Construction   | Polypropylene fibres are extruded through tiny Perforations under pressure and high temperature on a rotating mandrel, forming three layers for gradient filtration. |
| Flow           | 1m <sup>3</sup> per hour per 10" at pressure of 3.5Kg/cm <sup>2</sup>                                                                                                |
| Temperature    | Max. 60° C                                                                                                                                                           |

# PYLOORITE<sup>®</sup>

## PLEATED FILTER CARTRIDGES

### TAILORED FOR PURE WATER WITH PRECISE DESIGN

- Innovative construction ensures pure water consistently in a sleek, seamless 20-inch design.
- Customized precision with micron options ranging from 0.1 to 10μ.
- Constructed with premium virgin polypropylene.



| Technical Name | PP Pleated Filter Cartridges                                                         |
|----------------|--------------------------------------------------------------------------------------|
| Raw Material   | Virgin Polypropylene                                                                 |
| ID             | 27 mm                                                                                |
| OD             | 65 mm or as required by customer                                                     |
| Length         | 5" 10" 20" 30" 40" & 50"                                                             |
| Microns        | 0.1, 0.2, 0.45, 1, 2, 5 & 10μ                                                        |
| Construction   | Inside and outside perforated core,<br>In between pleated membrane filtration media. |
| Top & Bottom   | DOE (Double open end)<br>SOE (Single open end)                                       |
| Flow           | 1m <sup>3</sup> per hour per 10" at pressure of 2.5kg/cm <sup>2</sup>                |
| Temperature    | 60° C                                                                                |



## HIGH FLOW PLEATED FILTER CARTRIDGE

**HIGH FLOW RATE, AND ROBUST  
CONSTRUCTION FOR OPTIMAL  
PARTICLE CAPTURE.**

- Comes with a filtration area and versatile chemical compatibility
- High flow rate, coupled with robust construction for long-lasting durability.
- Optimal particle capture and has good dirt-holding capacity.



### Application

Sea water desalination

Oil & Chemical

Food and Beverages

White Fuels

Process Water

Amine, Glycol

Power plant water treatment

Naphtha, HC Condensate


RO Guard Pre-filtration

Steel mill water treatment

# PP CORE FOR FILTER CARTRIDGE

## CRAFTED BY EXPERTS FOR DURABLE FILTRATION

- Crafted from top-tier Polypropylene, ensuring robustness for extended and high-quality filtration.
- Reinforced with a Tinned Steel Core, providing reliability and consistent performance.
- Versatile size for various needs.

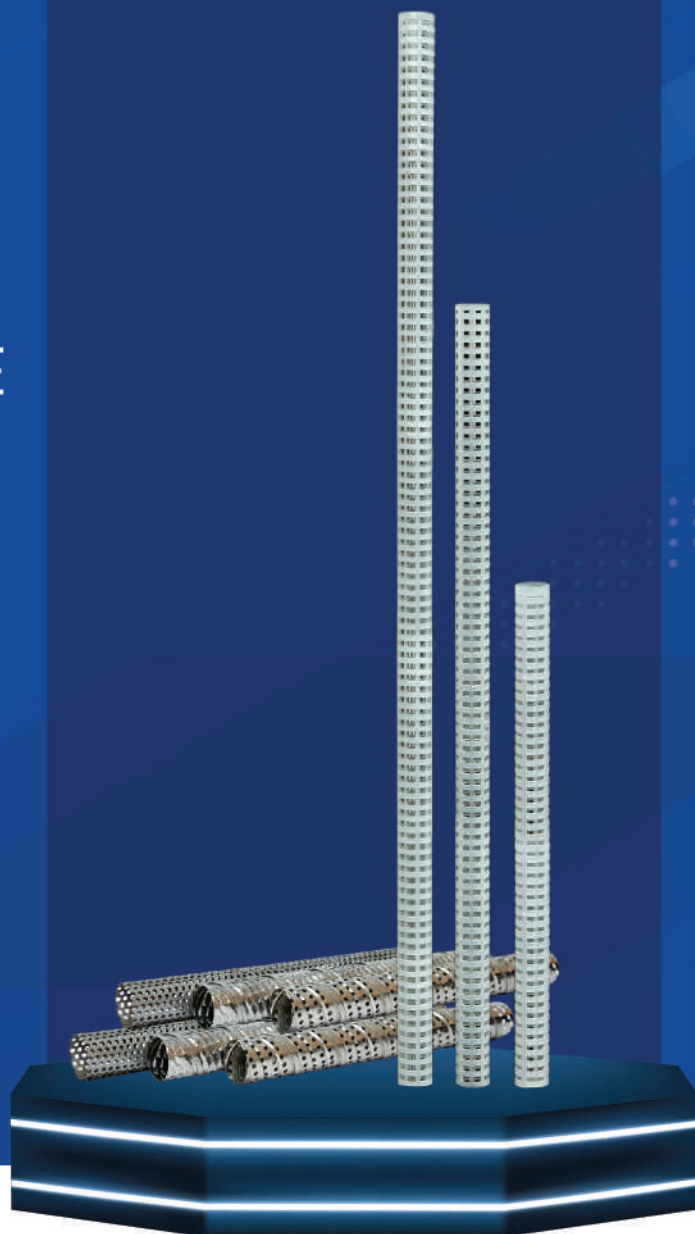

| Technical Name | Core for Filter Cartridge                                  |
|----------------|------------------------------------------------------------|
| Raw Material   | Polypropylene<br>Stainless Steel Core<br>Tinned Steel Core |
| ID             | 28 mm                                                      |
| Length         | 10", 20", 30", 40" Single Drawn Core                       |



## WINDING MACHINE FOR WOUND FILTER


- Electronically controlled.
- Easy to use.
- Low maintenance
- Winding Core Material :  
Polypropylene, Stainless  
Steel, Tinned Steel.



| Technical Name    | Software Supported Electronic String Wound Filter Machine                        |
|-------------------|----------------------------------------------------------------------------------|
| Technical Details | Encoder with variable frequency motor                                            |
|                   | Servo motor / Servo drive                                                        |
|                   | Power : AC 220V/ 50HZ single phase                                               |
|                   | Winding Core Material : Polypropylene, Melt Blown, Stainless Steel, Tinned Steel |
|                   | Winding Tube : 28mm                                                              |
|                   | Winding length : 250/254mm, 500/508mm, 750/762mm, 1000/1016 mm                   |
|                   | Automatic stop sensor                                                            |
|                   | Winding OD Diameter : 200mm                                                      |
|                   | The pattern and precision of winding by software Support                         |
|                   | Ratio Input for winding filters                                                  |
|                   | No gears required for changing filter pattern                                    |
|                   | Low maintenance                                                                  |

## POLYPROPYLENE HOMOPOLYMER FILTER HOUSING

- Leak-free one-piece design
- High pressure & temperature resistance
- Excellent corrosion resistance
- Easy maintenance & operation

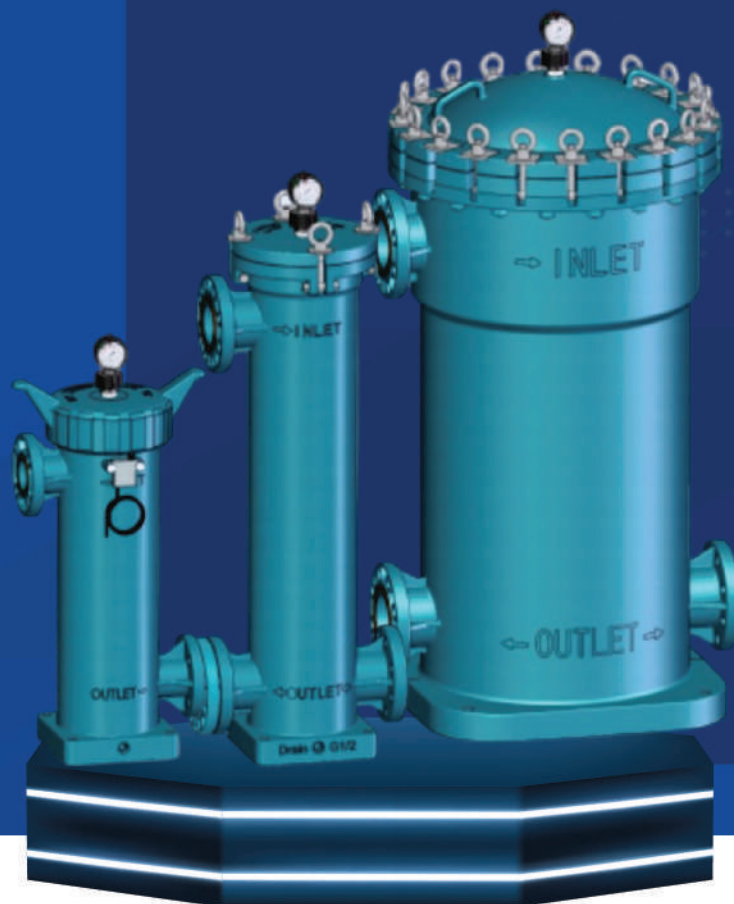

### Specifications

|                    |                                                                                                           |
|--------------------|-----------------------------------------------------------------------------------------------------------|
| Housing Materials  | Polypropylene Homopolymer                                                                                 |
| Housing direction  | Vertical                                                                                                  |
| Depth filter type  | String Wound Cartridge<br>Melt Blown Cartridge<br>Pleated Cartridge<br>Filter Bags<br>High flow Cartridge |
| Housing Thickness  | 16 mm, 22 mm                                                                                              |
| Connection         | Side port, Bottom port                                                                                    |
| Inlet/ Outlet Type | Flange                                                                                                    |
| Inlet/Outlet Size  | DN40, DN50, DN65, DN80 DN100                                                                              |
| Sealing Type       | Screwing cap type, Swing bolt type                                                                        |
| Seal material      | Viton                                                                                                     |



## RESIN BONDED FILTER CARTRIDGES

### MRB SERIES

- High dirt-holding capacity
- Chemical-resistant resin bonded filters
- Strong, durable, and long-lasting
- Versatile for water treatment, pharma, food & beverage, and chemicals.



Cross-sectional view for  
graded porosity of MRB series  
resin bonded filter



| Operating Data*    | RBF Series                                                      |
|--------------------|-----------------------------------------------------------------|
| Material           | Phenolic Resin & Composite Fiber                                |
| Max Temperature    | 135°C                                                           |
| Operating Pressure | 0.45MPa                                                         |
| Solvent Resistance | Expansion rate <2%<br>(Ketones, Ethers, Phenols, Alcohols etc.) |
| Anti-shrinkage     | No shrinkage and depression                                     |
| Inner Diameter     | 29mm                                                            |
| Outer Diameter     | 63-65mm                                                         |
| Length             | 3.75 to 40 inch                                                 |
| Micro Rating       | 1, 5, 10, 25, 50, 75, 100, 125, 150, 200µm                      |

# RESIN BONDED FILTER CARTRIDGES

## MAB SERIES

- Robust Structure
- High Dirt-Holding Capacity
- Varied Micron Ratings
- Chemical Resistance

Cross-sectional view for  
Multi-layer of MAB Series  
Resin Bonded filter



| Operating Data*    | MAB Series                                                      |
|--------------------|-----------------------------------------------------------------|
| Material           | Phenolic Resin & Composite Fiber                                |
| Max Temperature    | 135°C                                                           |
| Operating Pressure | 0.45MPa                                                         |
| Solvent Resistance | Expansion rate <2%<br>(Ketones, Ethers, Phenols, Alcohols etc.) |
| Anti-shrinkage     | No shrinkage and depression                                     |
| Inner Diameter     | 29mm                                                            |
| Outer Diameter     | 63-65mm                                                         |
| Length             | 3.75 to 40 inch                                                 |
| Micro Rating       | 1, 5, 10, 25, 50, 75, 100, 125, 150, 200µm                      |



# CERTIFICATES

  
**केन्द्रीय अर्थसूचना एवं राजस्व विभाग**  
**CENTRAL BOARD OF INDIRECT TAXES AND CUSTOMS**  
**भारत सरकार**  
**GOVERNMENT OF INDIA**

  
 Please scan for validity

  
**प्रमाणित आर्थिक संचालक एक्सपोर्टर-इम्पोर्टर**  
**AUTHORIZED ECONOMIC OPERATOR MSME CERTIFICATE**  
**(IMPORTER & EXPORTER)**

  
**भारतीय सीमा शुल्क**  
**INDIAN CUSTOMS**

प्रमाणपत्र संख्या Certificate Number : IN/AACDM4694A1F212  
 कम्पनी का नाम : M/s MMP FILTRATION PVT. LTD.  
 Name of Company : 22 MOHAN TALLA STREET, KOLKATA, WEST BENGAL, 700005  
 IEC Number : 0203005136

अन्तर्राष्ट्रीय आपूर्ति श्रृंखला को सुरक्षित रखने हेतु आपकी प्रतिबद्धता का सम्मान करते हुए एवं टैक्स से भी आपके फ्रेमवर्क और स्टैंडर्ड के अनुसार में से भी आई सी के परिपत्र संख्या 33/2016-सीमा शुल्क, दिनांक 22.07.2016 तथा परिपत्र संख्या 54/2020-सीमा शुल्क, दिनांक 15.12.2020 के अन्तर्गत भारतीय सीमा शुल्क अपने प्रमाणित आर्थिक संचालक (एईओ) कार्यक्रम में आपकी प्रतिष्ठित कंपनी को प्रमाणित करता है। इस प्रमाणपत्र की वैधता से भी आई सी परिपत्र संख्या 18/2021 दिनांक 31.07.2021 प्रभावर्धन के अधीन है।

In recognition and appreciation of your commitment to secure the international supply chain and in compliance with the WCO's SAFE Framework of Standards, Indian Customs certifies your esteemed organization in its Authorized Economic Operator (AEO) programme under CBIC Circular Number 33-2016-Customs, dated 22.07.2016 read with Circular Number 54/2020-Customs dated 15.12.2020. The validity of this certificate is subject to the provisions of CBIC Circular No. 18/2021 dated 31.07.2021.

आरटी अग्रवाल सीनियर  
 Art Aggarwal, Senior  
 एईओ कार्यक्रम प्रबंधक/प्रधान अधिकारी  
 AEO Programme Manager / Principal Officer  
 अन्तर्राष्ट्रीय सीमा शुल्क निदेशालय  
 Directorate of International Customs

स्थान : नई दिल्ली  
 Place : New Delhi  
 दिनांक : 24.10.2021  
 Dated : 24.10.2021  
 This Certificate is digitally signed by AEO Programme Manager

  
**OFFICIAL LISTING**

NSF certifies that the products appearing on this listing conform to the requirements of NSF/ANSI/61 - Drinking Water System Components - Plastic Materials.  
 This is the Official Listing recorded on August 3, 2021.

MMP Filtration Pvt. Ltd.,  
 C7-602 Shambhavi Tower,  
 Mr. Jain Detainer, 89 Road,  
 Thakur, Ahmedabad, Gujarat,  
 380015  
 India  
 Rs. 79 34588831

Facility: Gujarat, India

| Trade Designation                       | Size | Water Contact | Water Contact |
|-----------------------------------------|------|---------------|---------------|
| Filtration System / Components          |      | Flow          | Material      |
| Laport Multi Stage Cartridge - (1) (2)  | (1)  | 150 GPD       | PP            |
| - (2)                                   | (2)  | 150 GPD       | PP            |
| Reverse Multi Stage Cartridge - (2) (3) | (3)  | 150 GPD       | PP            |

(1) The Laport Multi Stage Cartridge - (1) is certified for a maximum flow rate of 1,000 litres per day per inch of filter for use in industrial water treatment facilities only.  
 (2) The Laport Multi Stage Cartridge - (2) and Laport Multi Stage Cartridge - (2) require a pre-treatment filter for a minimum of 5.1 micron (100 microns).  
 (3) The Laport Multi Stage Cartridge - (3) is certified for a maximum flow rate of 1,000 litres per day per inch of filter for use in industrial water treatment facilities only.  
 (4) The Laport Multi Stage Cartridge - (4) is certified for a maximum flow rate of 1,000 litres per day per inch of filter for use in industrial water treatment facilities only.  
 (5) The Laport Multi Stage Cartridge - (5) is certified for a maximum flow rate of 1,000 litres per day per inch of filter for use in industrial water treatment facilities only.

NSF International shall not be held liable for this document without prior evaluation and acceptance by NSF.  
 NSF International, Ann Arbor, Michigan 48105-9221 USA  
 1-800-NF-5555 / 734-766-8000  
 www.nsf.org

  
**OFFICIAL LISTING**

NSF certifies that the products appearing on this listing conform to the requirements of NSF/ANSI/372 - Drinking Water System Components - Lead Content.  
 This is the Official Listing recorded on August 3, 2021.

MMP Filtration Pvt. Ltd.,  
 C7-602 Shambhavi Tower,  
 Mr. Jain Detainer, 89 Road,  
 Thakur, Ahmedabad, Gujarat,  
 380015  
 India  
 Rs. 79 34588831

Facility: Gujarat, India

Filtration System / Components  
 Laport Multi Stage Cartridge - (1)  
 Laport Multi Stage Cartridge - (2)

NSF International shall not be held liable for this document without prior evaluation and acceptance by NSF.  
 NSF International, Ann Arbor, Michigan 48105-9221 USA  
 1-800-NF-5555 / 734-766-8000  
 www.nsf.org

**NSF International**  
 789 N. Dixboro Road, Ann Arbor, MI 48105 USA  
 RECOGNIZES  
**MMP Filtration Pvt. Ltd.**  
 India  
 AS COMPLYING WITH NSF/ANSI/CAN 61, 372 AND ALL APPLICABLE REQUIREMENTS.  
 PRODUCTS APPEARING IN THE NSF OFFICIAL LISTING ARE AUTHORIZED TO BEAR THE NSF MARK.


This certificate is the property of NSF International and must be returned upon request. This certificate remains valid as long as the listed products are NSF certified and comply with the referenced standards. For the most current and complete listing information, please access NSF's website (www.nsf.org).

August 2, 2021  
 Certificate C0751134-01  
 David Perkins  
 Vice President, Global Water Division

**NSF International**  
 789 N. Dixboro Road, Ann Arbor, MI 48105 USA  
 RECOGNIZES  
**MMP Filtration Pvt. Ltd.**  
 Facility: Gujarat, India  
 AS COMPLYING WITH NSF/ANSI/CAN 61, NSF/ANSI 372 AND ALL APPLICABLE REQUIREMENTS.  
 PRODUCTS APPEARING IN THE NSF OFFICIAL LISTING ARE AUTHORIZED TO BEAR THE NSF MARK.


This certificate is the property of NSF International and must be returned upon request. This certificate remains valid as long as the listed products are NSF certified and comply with the referenced standards. For the most current and complete listing information, please access NSF's website (www.nsf.org).

August 4, 2021  
 Certificate C0751135-01  
 David Perkins  
 Vice President, Global Water Division

**NSF International**  
 789 N. Dixboro Road, Ann Arbor, MI 48105 USA  
 RECOGNIZES  
**MMP Filtration Pvt. Ltd.**  
 Facility: Gujarat, India  
 AS COMPLYING WITH NSF/ANSI/CAN 61, 372 AND ALL APPLICABLE REQUIREMENTS.  
 PRODUCTS APPEARING IN THE NSF OFFICIAL LISTING ARE AUTHORIZED TO BEAR THE NSF MARK.


This certificate is the property of NSF International and must be returned upon request. This certificate remains valid as long as the listed products are NSF certified and comply with the referenced standards. For the most current and complete listing information, please access NSF's website (www.nsf.org).

August 2, 2021  
 Certificate C0751136-01  
 David Perkins  
 Vice President, Global Water Division

**Ahmedabad Office**

C3-602, Anushruti Tower, SG Road, Thaltej,  
Ahmedabad – 380059, Gujarat, India.

**Contact**

+91 70437 45709, +91 98300 30030

**Email**

ahmd-sales@mmpfilter.com  
ntodi@mmpfilter.com