


PRACHAM®
FILTER INDUSTRIES



PURIFYING
WATER,
EMPOWERING
INDUSTRIES!

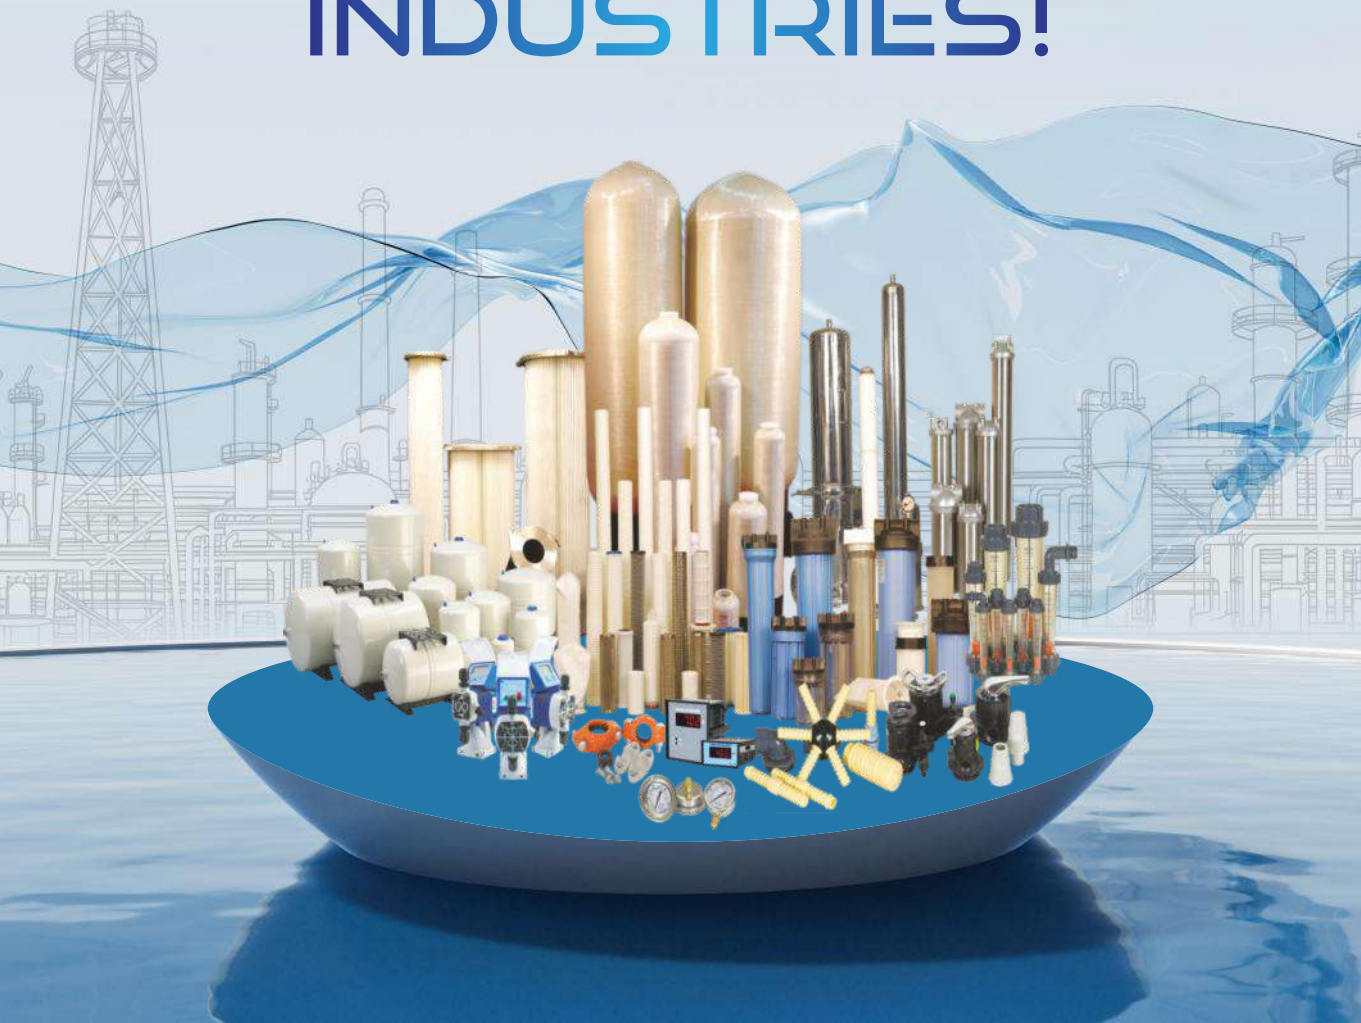

PURE FILTRATION, TRUSTED QUALITY

Since 2003, Pratham Filter Industries has been a leader in providing high-quality filtration solutions. With a strong presence in manufacturing, wholesaling, exporting, and importing, we cater to diverse industries with reliable and innovative filtration technology.



OUR COMMITMENT

We are dedicated to ensuring the purity and safety of water through advanced filtration solutions. Our focus on quality, innovation, and customer satisfaction drives us toward becoming a global industry leader.

WHY CHOOSE US?

With over two decades of expertise, we are committed to delivering high-quality filtration solutions backed by stringent quality control. Our customer-centric approach ensures tailored solutions that meet specific needs, while our global presence enables us to serve industries worldwide with cutting-edge technology.



We offer a wide range of purification treatment products designed to meet the diverse needs of water and Industrial Water Purification Treatment Across Various Industries.

PLASTIC FILTER HOUSINGS

PRACAM[®]
FILTER INDUSTRIES

The plastic filter housings are ideally used for wide range of applications including residential, commercial and industrial. These are available in 5", 10" and 20" configuration with both slim for low flow and Jumbo for large flow application. The Optional Relief Valve on the inlet of the cap gives ease of air release and prevents vacuum damage and full utilization of the filter elements. The thick side walls give it high pressure ratings. The top seated silicon O rings in the slim and the body fitted double O rings in the Jumbo makes it Leak Proof even at high pressure applications.

MOC: Polypropylene / Poly carbonate / SAN

Model	Size	Conn	MOC
Standard Blue (2.5")	10"	1/2", 3/4", 1"	Polypropylene
	20"		
BB -L / V Jumbo (4.5")	10"	1", 1.5"	
	20"		
Clear (2.5")	10"	3/4"	SAN
	20"		



BL / CL / BBL



PBA

BAG FILTER ASSEMBLY

Conn: 1.5" BSP F

The series bag vessels are made of light weight corrosion resistant PP to give all strength required without being bulky. The fixed head mounting & compact design makes it easy to mount to any machine. All the PBA models are supplied with Pressure guage, wrench & drain valve.

Configuration:

Std : Dia 4.5" x 10" & 20" with 1.5" BSP female threaded connection

Flow per 10":

100 LPM for raw water with operating pressure of 2.5 bar.

STRING WOUND DEPTH FILTER CARTRIDGE

The PP series cartridges offer wide chemical resistancy spectrum. These cartridges are manufactured by PP cord wound on a PP core in a precise pattern, assuring a high efficiency rating as well as a high dirt holding capacity.

Flow per 10":

Std 16 LPM and Jumbo 50 LPM for raw water with a operating pressure of 2.5 bar.



PP / BB

MOC	CORE	DIAMETER INCH/MM	LENGTH	MICRON
PP / Cotton	PP / SS	2.5" (63)	10"	0.5
		4" (100)	20"	1
		4.5" (115)	30"	5
			40"	10
				25

SP/ SP BB

SPUN PP DEPTH FILTER CARTRIDGE

The SP Series cartridges are made up of 100% pure PP fibers. The fibers have been carefully spun together to form a true graded density cartridge.

Flow per 10":

Std 16 LPM and Jumbo 50 LPM for raw water with a operating pressure of 2.5 bar.

MOC	DIAMETER INCH/MM	LENGTH	MICRON
Polypropylene(PP)	2.5" (63)	10"	0.5
	4" (100)	20"	1
	4.5" (115)	30"	5
		40"	10
			25

HIGH-EFFICIENCY PLEATED PP FILTER CARTRIDGE


PRACAM[®]
FILTER INDUSTRIES

Micron: 0.2, 0.45, 1, 5, 10, 25

The PL PP series of cartridges are the most latest form of truly graded density micro-fiber media in pleated form. The multi layer pleating has created the graded density with coarser on the outside and finer towards the inside thereby increasing the dirt holding with very high efficiency.

MEDIA		TYPE	
PP	Polypropylene	DOE	Double Open End
PES	Poly Ether Sulfon	222 S	SOE Code 3 Spear
PT	PTFE	222 F	SOE Code 3 Flat
NY	Nylon	226 S	SOE Code 7 Spear
		226 F	SOE Code 7 Flat

LENGTH	5	9	10	20	30	40
	125mm	245mm	251mm	508mm	762mm	1016mm

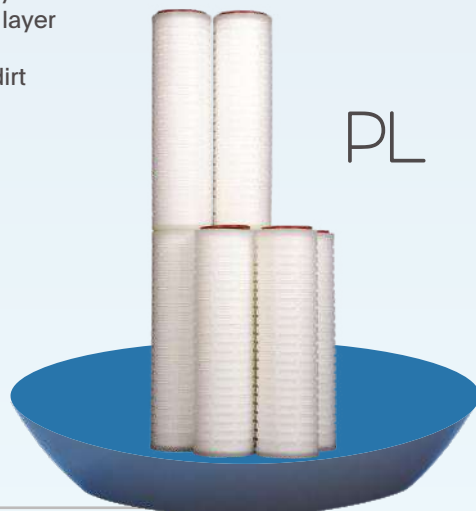

ACTIVATED CARBON FILTER CARTRIDGE

The CT series cartridges combine the long life of carbon block filtration with higher dirt holding capacity. These cartridges yield 5 micron nominal filtration which prevents the cartridge from plugging before its absorption capacity is exhausted, maximizing the utilization of the carbon.

Flow per 10"

16 LPM for std 10" and 30LPM for Jumbo 10".

MOC	DIAMETER INCH/MM	LENGTH	MICRON
Activated Carbon Block	2.5" (63)	10"	5
	4.5" (115)	20"	



FILTER BAGS

Micron: 1, 5, 10, 25, 50, 75, 100 um

The BP series bags are made of non woven needle felt with glazed finish PP. This finish is created by melting of the outermost surface fibers producing a bond which reduces the possibility of migration. The PP moulded top and the ends are ultrasonically welded together. The RSB series of bags are made of three layers of media. The inner layer works as a pre filter which is made of the omit coarse Nylon mesh, the centre layer is non woven felt which does the actual filtration and the outer most layer is made with super fine spun bond fabric for final filtration. The unique Rubber collar ensures 0 BYPASS & 100% seal and very accurate filtration.

Configuration:

BP: Dia 4" x 10" & 20" & RSB: Dia 7" x 17" & 32"

Flow per 10":

100 LPM for 10" BP series and 200 LPM for 17" of RSB for raw water with operating pressure of 2.5 bar.



SS MULTI CARTRIDGE HOUSINGS / SS STRAINERS



The SS series of Stainless Steel Housings are heavy duty units meant for large commercial and industrial applications. These units are custom made as per the process and design requirements of the user. The technical support in making these units successful includes complete in house drawings, tests and inspection procedure which are strictly followed for every single unit. The flow range we can handle is as high as 500m³/hr from these systems.

The STR series of Stainless steel strainers are ideal pre filters for ETP / STP and large Ultra Filtration Systems. The Unique CIP design makes it easy to clean with least down time. These are tailor made system to accommodate/ handle high volume of suspended solids. The pleated design strainers used in these systems makes them compact offering very high filtration area and high dirt holding capacity.

Configuration:

Std suitable for Multi cartridges 2.5" x 10", 20", 30" and 40" and Jumbo suitable Multi cartridge of 4.5" x 10" & 20" cartridges. Strainers from 1.5" to 8" for flow ranging from 5m³/hr to 500m³/hr.

MOC:

SS 304, SS 316 and SS 316L

SS / STR

SS FILTER CARTRIDGE

Micron: 5, 10, 15, 25, 40, 50, 80, 100 um


The AC & ACP series filter cartridges is made out of versatile SS wire mesh in various micron ratings. The SS construction makes the filter resistant to all chemicals & temperatures. The surface filtration technology boosts the flow rate to almost double of all the standard filter cartridge with ZERO replacement cost.

Configuration: Std : Dia 2.5" x 10", 20", 30" and 40"
Jumbo - 4" x 10", 20", 30" and 40".

Flow per 10": Std: 30 LPM and Jumbo 50 LPM for raw water with operating pressure of 2.5 bar.

MOC	Core	Diameter inch /mm	Length	Micron
SS 304/316	SS	2.5" (63) 4" (100) 4.5" (115)	10" 20" 30" 40"	5
				10
				15
				25
				40
				50
				80
				100

AC / ACP

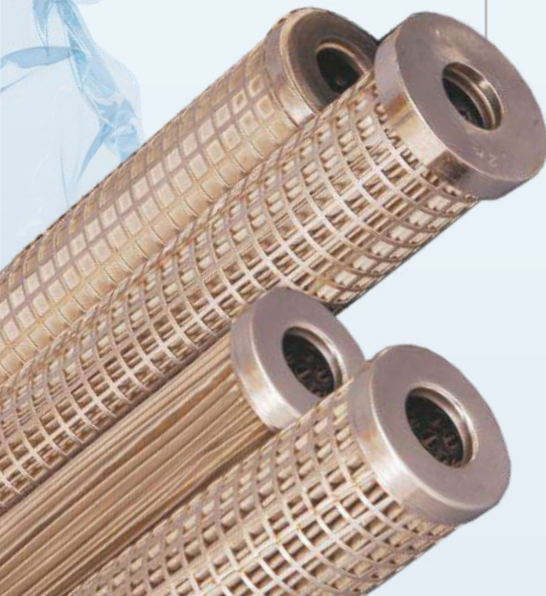

HYDRO PNEUMATIC TANKS

PRACAM®
FILTER INDUSTRIES

There are several functions that a Hydro-pneumatic Tank can perform. In a booster pump application, it can provide water to the system during periods of a no flow shut down of the booster pump or it can provide water to replace leak loads. In a well water application, it can provide the desired volume of water required between the pump shut down pressure and the pump turn on pressure. In a sprinkler or irrigation pump application the tank may provide a cushion to maintain necessary pressure so the jockey pump will not short cycle.

These tanks are ideal choice for new and replacement residential installations and pressure boosting applications.


Model	Volume	Opening	Operational Pressure
WM 6	75 LTR	1" NPT (M)	8.6 Bar
WM 9	112 LTR	1" NPT (M)	8.6 Bar
WM 14	178 LTR	1.25" NPT (M)	8.6 Bar
WM 20	227 LTR	1.25" NPT (M)	8.6 Bar
WM 25	328 LTR	1.25" NPT (M)	8.6 Bar
WM 35	453 LTR	1.25" NPT (M)	8.6 Bar



VICTAULIC TYPE COUPLINGS



The VC series consist of Cast Iron Victaulic Type ribbed couplings. They are used for connecting grooved end pipes. The Cross ribbed constructions supports high working pressure. The EPDM coupler in the Glands provides flexibility, contraction and expansion. The Style 77 type couplings boasts pressure ratings as high as 1000 psi.

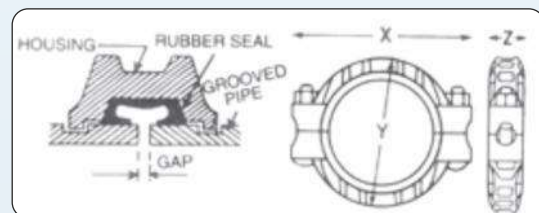

VC

PIPE SIZE		DIMENSIONS			BOLTS		
Nominal Bore mm	O.D. mm	X mm	Y mm	Z mm	No	Dia Inch.	Length mm
20	26.7	92	54	44	2	3/8	50
25	33.4	98	61	44	2	3/8	50
32	42.2	118	70	44	2	1/2	65
40	48.3	127	76	44	2	1/2	65
50	60.3	143	96	44	2	1/2	65
65	76.1	160	110	44	2	1/2	70
80	88.9	178	128	44	2	1/2	70
100	114.3	216	162	52	2	5/8	83
125	139.7	240	194	52	2	3/4	108
150	165.1	292	232	52	2	3/4	108
150	168.3	292	232	52	2	3/4	108
200	219.1	368	288	60	2	7/8	127
250	273.0	425	343	64	2	1	152
300	323.9	483	394	64	2	1	165
350	355.6	508	423	73	2	1	165
400	406.4	568	483	73	4	1	90
450	457.4	619	540	79	4	1	90
500	508.0	698	596	79	4	11/8	102
550	559.0	672	650	79	4	11/8	102
600	609.6	798	702	79	4	11/8	102

MULTI PORT VALVES

MPV are made from wear resistant, high hardness ceramic disk that provide longer service life. Innovatively designed, easy to handle, also excellent seal capability preventing internal leakage. By just clockwise and anti clockwise rotating of handle multiple functions can be performed such as filter, back wash, rinse, brine suction Etc.



MPV

Model	Description	Connection
20TMFH/F	Top Mount Filter Valve (High Flow)	3/4"
20TMSH/F	Top Mount Softner Valve (HighFlow)	3/4"
25TMFFF	Top Mount Filter Valve(Front Facing)	1"
25TMSFF	Top Mount Softner Valve (Front Facing)	1"
25SMF	Side Mount Filter Valve	1"
25SMS	Side Mount Softner Valve	1"
25SDM	Side Mount DM valve	1"
25TDM	Top Mount DM valve	1"
40SMS	Side Mount Softner Valve	1.5"
40SMF	Side Mount Filter Valve	1.5"
40TMS	Top Mount Softner Valve	1.5"
40TMF	Top Mount Filter Valve	1.5"
40SDM	Side Mount DM valve	1.5"
40TDM	Top Mount DM valve	1.5"
40SMB	Side Mount Mixed Bed Valve	1.5"
65SMF	Side Mount Filter Valve	2.5"
65SMS	Side Mount Softner Valve	2.5"
Automatic Multi Port Valves (AutoMPV)		
20TMS/FA	Top Mount Softner Valve (Auto)	3/4"
20TMFA	Top Mount Filter Valve (Auto)	3/4"
25T/SMFA	Side Mount Filter Valve (Auto)	1"
25T/SMSA	Top Mount Softner Valve (Auto)	1"
25TDMA	Top Mount DM valve (Auto)	1"
40SMFA	Side Mount Filter Valve (Auto)	1.5"
40SMSA	Side Mount Filter Valve (Auto)	1.5"
40TMFA	Top Mount Softner Valve (Auto)	1.5"
40TMSA	Top Mount Softner Valve (Auto)	1.5"
65SMFA	Side Mount Filter Valve (Auto)	2.5"
65SMSA	Side Mount Filter Valve (Auto)	2.5"

Description	Code	Conn
In-Out Adapter With T&B Distributor	P2.5IO-32	2.5"
Top Mount Hub & Lat. System w/ Glue	P1450TM	Top open vessels
	P1650TM	
	P2150TM	
	P2450TM	
	P3050TM	
	P3650TM	
T/B Mount Stack Diffuser without basket	P4R2-63B	4"
	P4R2-63	4"
	P6FR2-75B	6"F
	P6FR2-75	6"F
	P6FR3-75B	6"F
	P6FR3-75	6"F
Bottom Mount Hub & Lateral System	P414-63	4"/14
	P416-63	4"/16
	P421-63	4"/18/21
	P424-63	4"/24
	P430-63	4"/30
	P436-63	4"/36
Bottom Mount Hub & Lateral System	P6F14-75	6"F/14
	P6F16-75	6"F/16
	P6F21-75	6"F/21
	P6F24-75	6"F/24
	P6F30-75	6"F/30
	P6F36-75	6"F/36
Top Mount Hub & Lateral System	P-6F42-75U/76U	6"F/42
	P-6F48-75U/76U	6"F/48
	P-6F63-90U/91U	6"F/63
Bottom Mount Hub & Lateral System	P-6F42-75L/76L	6"F/42
	P-6F48-75L/76L	6"F/48
	P-6F63-90L/91L	6"F/63

DISTRIBUTION SYSTEMS

The DS series comprises the vast range of Distribution system primarily used as the internals of the FRP tanks. These are made with very high quality plastics with exact pore sizes to suit the application. These Distribution systems are easy to assemble and install. They assembly consist of finely slotted grooved Laterals that allow easy channeling of water to flow without passing the media or resins to the systems. The uniform spacing and grooving allow uniform distribution of water during backwash and service flow. The Specially designed Vacuum Breaker prevents air lock in the system saving loss of damage of vessels being crack due to vaccum or result leakages in the line.

Flow ranging from 1m³/h 3 to 40 m³/hr

DS



Vessel	Model (Size in Inches)	Speciication	Volume (In Litres)
POLYGLASS	844-2.5"T	2.5" Threaded Top Open	32.9
	948-2.5"T		44.7
	1035-2.5"T		38.6
	1054-2.5"T		62
	1248-2.5"T		78
	1354-2.5"T	4" Threaded Top open	104
	1354-4"T		104
	1465-4"T		154
	1665-4"T		185
Composite FRP Tanks 4" Threaded	1865-4"T	4" Threaded Top open-10 Bar	250
	2162-4"T		310
	2472-4"T		450
	1865-4"T&B	4" Threaded Top & Bottom - 10 Bar	250
	2162-4"T&B		310
	2472-4"T&B		450
	3072-4"T&B		710
	3672-4"T&B		1020
	2472-6"FLT&B	6" Flange Top & Bottom - 10 Bar	450
Composite FRP Tanks 6" Flanged	3072-6"FLT&B		710
	3672-6"FLT&B		1020
	4272-6"FLT&B		1360
	4872-6"FLT&B		1840
	6367-6"FLT&B		2300
	6386-6"FLT&B		2640
	6386-6"FLT&B		2640

SPG/
FRP / TSE

PRATHAM[®]
FILTER INDUSTRIES



FRP PRESSURE VESSELS

The FRP Pressure Vessels are made up of high performance composite material with filament winding. All Pressure Vessels are 100% corrosion resistant with Thermoplastic Liners of Polyester. These are NSF & PED Certified.

These are widely used for Pressure Sand Filters, Softeners, Mixed Bed, De Mineralization and Carbon beds.

UPVC CARTRIDGE FILTER HOUSINGS AND BAG FILTERS

Pratham's unique UPVC Cartridge Filter housings and Bag Filters have been designed to cater large flow rates which cannot be handled by Standard Single Cartridge Housings. Since the MOC is UPVC which is compatible with most chemicals it can handle higher TDS and salt levels in Large Desalination / ETP plants and other Chemical Filtration Systems thus eliminating the risk of corrosion and leakages in the filter.

The Application of these housings are Large ETP/ STP, Desalination Plants, ZLD units, Food & Beverages, Electroplating, Chemical Industries etc

Models



Item	Model	Configuration	Length	Connection
Multi Cartridge Filter Housings	UPVC 205	5 Filter of 20"	20"	DN50 /
	UPVC 305	5 Filter of 30"	30"	ANSI 2"
	UPVC 405	5 Filter of 40"	40"	
	UPVC 309	9 Filter of 30"	30"	DN80 /
	UPVC 409	9 Filter of 40"	40"	ANSI 3"
Bag Filter Housings	UPVC 717	1 Bag of Size 7-16	16"	DN50 /
	UPVC 732	1 Bag of Size 7-32	32"	ANSI 2"

MEMBRANE PRESSURE VESSELS

High precision FRP winding technology & superior raw material go into the manufacturing of RO housings. This enable to withstand high pressure. FRP material provide resistance to almost all chemicals & hence can be used in a variety of corrosive environment. Being light weight, these housings are easier to transport and install. RO housing comes with complete head assembly which has 20-40% lesser parts.

Options :

RO 150 to 1200 PSI from single membrane to 7 membranes per housing.

Model	Type	No. of Element
Ecoline-40L30N-1	4" End Port 300 PSI	1
Ecoline-40L30N-2		2
Ecoline-40L30N-3		3
Codeline 40S30NC-1	4" Non Coded Side Port 300 PSI	1
Codeline 40S30NC-2		2
Codeline 40S30NC-3		3
Codeline 40S30NC-4		4
Codeline 40S30NC-5		5
Codeline 40S30NC-6		6
Ecoline -300-1	8" Side Port 300 PSI	1
Ecoline -300-2		2
Ecoline -300-3		3
Ecoline -300-4		4
Ecoline -300-5		5
Ecoline -300-6		6
Codeline 80E30-1	8" Coded End Port 300 PSI	1
Codeline 80E30-2		2
Codeline 80E30-3		3
Codeline 80E30-4		4
Codeline 80E30-5		5
Codeline 80E30-6		6
Codeline 80S30-1	8" Coded / Non Coded Side Port 300 PSI	1
Codeline 80S30-2		2
Codeline 80S30-3		3
Codeline 80S30-4		4
Codeline 80S30-5		5
Codeline 80S30-6		6

Note: Options for Higher pressure ratings and multiports available on demand.



RO MEMBRANE

The RO membranes include membranes of both 4" & 8" used for Brackish water with maximum TDS of 8000ppm. We can also provide Sea Water, Low fouling & Speciality on request with attractive prices and delivery.

Models	
BW30 PRO-365	8"x40"
BW30 PRO-400	
BW30 PRO-400/34	
BW30 PRO-400/34i	
BW30XHR PRO-400/34	
BW30XHR PRO-400/34i	
SW30HRLE-400	
SW30XFR-400/34	
LC HF-4040	4"x40"
LC LE-4040	
BW30 PRO-4040	
SW30-4040	Hot Water
HSRO-4040-FF	
HSRO-390-FF	

DUPONT



ANTI SCALANTS

We provide you with high grade of General and Silica based anti scalants to be dosed regularly in RO plants. Our anti scalants control all they kinds of inorganic, metal or colloidal scales and precipitates even at extreme pH and temperatures. The prevent scale formation and even biological growth in few application. The polymer construction makes it compatible for all kinds of RO applications.

PRACAM[®]
FILTER INDUSTRIES

GNSCA



RESINS

We offer you a wide variety of resins starting from standard Cation used for softening application to all types of Cations and Anions used for Demineralization or Mixed Bed application. We also support application where in specialized resins and chemicals are used on the basis of application. Our Ware house are stocked with the standard Cation and Anion for Softners and DM plants



UF MEMBRANE

The Ultrafiltration (UF) membranes of X-Flow are used for the (pre)treatment of water. X-Flow offers innovative membrane modules and units for water purification and separation. X-Flow membranes are used in the field of ultrafiltration in capillary form, and microfiltration and ultrafiltration in tubular form, which makes selective filtration possible. Our extensive portfolio of membrane products guarantees the right specifications for each application. The X-Flow membrane modules are available for all water areas, from potable water production to the treatment of process and wastewater and the pre-treatment of seawater, but also for the food, beverage and pharmaceutical industries.



Model	Area	Size	MOC
XP 51 IG	51m2 (549 sqft)	Dia 8" x 60" Length	H - PVDF
XP 51	51m2 (549 sqft)	Dia 8" x 60" Length	H - PVDF
XP 77 IG	71m2 (829 sqft)	Dia 8" x 80" Length	H - PVDF
XP 77	71m2 (829 sqft)	Dia 8" x 80" Length	H - PVDF

FLOW METER

FM series flow meters are sturdy and compatible type flow meters. Its Poly Sulfone(PSU) / Polycarbonate(PC) body, PVDF floats make it compatible for a very high range of pH. The strong UPVC union / Elbow provides ease of installation and also economical and durable. Due to the non metallic float material the FM series highlight ZERO corrosion in the internals.



Model	DN (mm)	Range		Conn	Accuracy	°C	Mpa
		LPH	CUM				
FM 15	15	25-250 40-400 60-600		1/2" BSP F	±4%	0-60	≤1.0
FM 25	25		0.1-1.0 0.16-1.6 0.25-2.5	3/4" BSP F			
FM 32	32		0.4-4.0 0.6-6.0	1" BSP F			
FM 40	40		0.6-6.0 0.8-8.0 1.0-10	1.5" BSP F			
FM 50	50		0.6-6.0 1.0-10 1.6-16	2" BSP F			
FM 65	65		5-25 8-40 12-60	2.5" BSP F			
FM 100	100		10-90 12-120	4" Flange			
FM 125	125		15-150 20-200	5" Flange			



DN	L	B1	B2	B3
15	220	20	26	51
25	230	32	39	60
32	290	40	49	72
50	350	63	73	98
65	420	75	88	

Model	Range	Online	Panel
SFM 15	60-600 120-1200	NA	1/2" BSP M
SFM 20	240-2400 360-3600	NA	3/4" BSP M

PRESSURE GAUGES

The PG series stands for the wide range of pressure gauges provided by us. With MOC starting with all GI to all SS construction, it offers complete cost and chemical compatibility. The standard which is commonly available is Brass internals with SS 304 bodies. They are suited for all water and water treatment applications.

Item	Range	Mounting	Conn	MOC
PG 160 C	0-11 Bar	Panel	1/4" BSP (F)	2.5" Dial - SS 304 Bourdon Type with Brass Internals
PG 160 B	0-11 Bar	Online		
PG 400 C	0-28 Bar	Panel		
PG 400 B	0-28 Bar	Online		



PG

ONLINE DIGITAL INSTRUMENTS

PRACAM[®]
FILTER INDUSTRIES

We provide QUALITY DIGITAL ELECTRONIC instruments passed through latest testing procedures and equipments. Our range includes Online Digital pH, Conductivity and TDS indicators. Along with Micro Controller based TDS, pH and Conductivity controllers.

All our instruments are supplied with their respective sensors and buffer solutions.



pH /
Conductivity /
TDS

Model	Description	Size	Range	Conn.
IN 510 CT	Online TDS / Conductivity Indicator with 4mtr wire and 1.0K cell sensor	96 x 96 x 70 mm	0-20/0-200/0-2000	1/2"
IN 510 T	TDS single range with 4mtr wire and 1.0K cell sensor	96 x 96 x 70 mm	5000ppm/ 9999ppm/ 20 or 200 ppt	1/2"
Optional	Current O/p - 4-20mA relay O/p - 1 or 2			
IN 510 MC	Micro Controller based Online TDS Controller with relay o/p	96 x 96 x 70 mm	20.00 or 200.0 or 2000 ppm	1/2"
Optional	Current O/p - 4-20mA relay O/p - 1 or 2			
IN 510 P	Online pH indicator with sensor and buffer solution	96 x 96 x 70mm	0-12	3/4"
Optional	Current o/p 4-20mA			
IN 510 MP	Micro Controller pH with relay O/P 1 or 2	96 x 96 x 70mm	0-12	3/4"
Optional	Current o/p 4-20mA			



FLOAT SWITCH SENSOR

Used to detect the level of liquid within a tank. The switch may be used in a pump, an indicator, an alarm, or other devices.

Specification:

- long life
- Rated voltage: 250V
- Rated current: 8A
- Working temperature: 0-80Â°C
- Mechanical endurance: ≥ 100,000 times
- Electrical endurance: ≥ 500,000 times

- Cable: 3m / 5m
- Contacts: NO+NC
- Shape: Square
- Weight: 690 gm

PRESSURE SWITCHES

FEATURES & BENEFITS

Danfoss KP pressure controls are used for regulating, monitoring and alarm systems in industry.

KP pressure controls are for gaseous media, air and liquid.

KPI pressure controls are suitable for plant in connection with liquid and gaseous media.

The pressure controls are fitted with a singlepole switch changeover (SPDT). The position of the switch depends on the setting of the pressure control and the pressure in the connector.





RANGE CHART & TECHNICAL SPECIFICATIONS

Model	AUV Standard	US Public Healthcare	Inlet / Outlet Size
ECS04L	200 LPH	250 LPH	¼" BSP (M)
ECS07L	400 LPH	650 LPH	½" BSP (M)
ECS15L	750 LPH	1290 LPH	¾" BSP (M)
ECS25L	1380 LPH	2600 LPH	¾" BSP (M)
ECS40L	2100 LPH	4000 LPH	1" BSP (M)
ECS70L	4500 LPH	7000 LPH	1½" BSP (M)

UV SYSTEM

FEATURES & BENEFITS

HIGH GRADE SS304L CHAMBERS

Using stainless steel direct from Salem Steel, each ECS Lite chamber is electro polished assuring better surface finish and corrosion free performance.

ADVANCED POWER SUPPLY

Perfectly matched and suited for the UV lamp, the new ECS Lite power supply provides upto 50% greater UV output as compared to local ballast/power supply which are typically designed for tube lights.

VALIDATED BY CFD TECHNOLOGY

Assured performance in a compact design. Uses same technology used to design rockets and formula one cars!




DOSING PUMPS

Dosing pump caters to a wide range of application including cleaning & hygienic, water treatment, industrial application, process and systems. These pumps with IP 65 Plastic enclosed are very easy to install & immune to power supply variation.

Configuration: 0.2 to 120 LPH Electro magnetic & motor driven pumps.

WIDE RANGE OF ETP AND STP

PRACAM[®]
FILTER INDUSTRIES

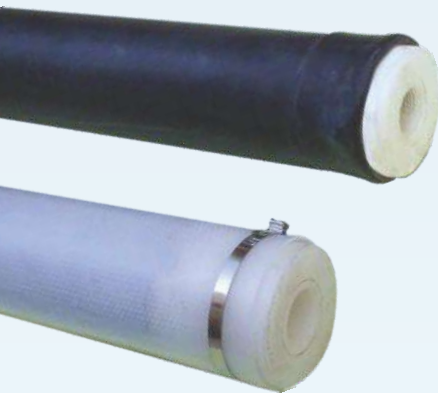

FINE BUBBLE AIR DIFFUSER

We provide the quality approved range of Fine Bubble Air Diffuser to our valuable clients. While manufacturing the offered air diffuser, our professionals use high grade raw material and superior technology in compliance with the set industry standards.

Size	Conn	Type
Ø63 x 500	3/4" BSP M	EPDM / Silicon
Ø63 x 600	3/4" BSP M	EPDM / Silicon
Ø63 x 1000	3/4" BSP M	EPDM / Silicon
Ø90 x 1000	1" BSP M	EPDM / Silicon

COARSE BUBBLE AIR DIFFUSER

Our offered air diffuser is precisely manufactured by our adapt professionals using the best grade raw material and latest technology. Provided air diffuser is available in various compact sizes and other related specifications to cater clients' specific demands. Widely known for unmatched quality and durable finish, our offered air diffuser is available at nominal price.



Size	Ø80mm (3")	Ø100mm (4")	Ø150mm (6")	Ø225mm (9")	Ø300mm (12")
------	------------	-------------	-------------	-------------	--------------



TUBE SETTLER MEDIA

Offer an inexpensive method of upgrading existing water treatment plant clarifiers and sedimentation basins to improve performance. They can also reduce the tankage / footprint required in new installations or improve the performance of existing settling basins by reducing the solids loading on downstream filters. Made of lightweight PVC, tube settlers can be easily supported with minimal structures that often incorporate the effluent trough supports. They are available in a variety of module sizes and tube lengths to fit any tank geometry, with custom design and engineering offered by the manufacturer.

Heights	600mm	750mm	1000mm
---------	-------	-------	--------

FAB MEDIA

FAB system is an advanced high rate wastewater treatment process utilizing free-floating media which houses huge quantity of active Biomass (MLSS) in it. Essentially CAB system is a hybrid reactor where attached growth and suspended growth activity takes place

Size : 16mm x 22mm



OUR BRANDS



WE REPRESENT



H.O. MUMBAI : K 12 A, Ansa Indl Estate, Saki Vihar Road, Andheri (E), Mumbai-400072.

Tel: +91 22 352 31803, **+91 22 356 16243, Cell:** +91 98 202 46044, **Email:** ajay@prathamfilter.com

BHIWANDI : Bldg. No. C1, Unit No. 15 & 16, Bhagwan Seth Estate, Bhd. Arihant Compound, Purna Village, Bhiwandi - 421302

Tel: +91 93 202 98044, **Cell:** +91 93 702 98044, **Email:** bhiwandi@prathamfilter.com

PUNE : Plot no 309, Sector 10, PCNTDA, MIDC, Bhosari, Nr. Times of India, Pune-411026

Tel: +91 73 046 68044, **Cell:** +91 93 704 98044, **Email:** pune@prathamfilter.com

AHMEDABAD : Unit no 4, Associated Estate, Sarkhej Changodar Road, Ujala Circle Nr. Ashwamegh Warehouse, Ahmedabad-381120

Tel: +91 75 738 98044, **Cell:** +91 75 739 98044, **Email:** ahmedabad@prathamfilter.com

CHENNAI : 1/61, Neelakantha Mudaliar Street, Vanagaram, Chennai - 600095.

Tel: +91 93 803 98044, **Cell:** +91 93 802 98044, **Email:** chennai@prathamfilter.com

DELHI : Khasra No 731-734, Lal Kuan, Mehrauli Badarpur Road, Village Tughlakabad, New Delhi-110044

Tel: +91 93 509 98044, +91 93 500 98044, **Cell:** +91 93 502 98044, **Email:** delhi@prathamfilter.com

KOLKATA : 218, Diamond Arcade, 1/72 Jessore Road, Shyam Nagar, Kolkata - 700055.

Tel: +91 93 305 98044, **Cell:** +91 93 302 98044, **Email:** kolkata@prathamfilter.com

GUWAHATI : House No. 14, Road No. 78, RGB Bye Lane, LKB Road, Nabin Nagar, Guwahati - 781024.

Tel: +91 97 062 98044, **Cell:** +91 98 325 98044 **Email:** guwahati@prathamfilter.com

HYDERABAD : B- 4, IDA UPPAL, Unit No.6, Hyderabad - 500039

Tel: +91 99 300 81944, **Cell:** +91 88 281 25044 **Email:** hyderabad@prathamfilter.com

www.prathamfilter.com