


This source describes Open Hardware and is licensed under the CERN-OHL-S v2.


You may redistribute and modify this source and make products using it under the terms of the CERN-OHL-S v2 (<https://ohwr.org/cernohlsv2.txt>). This source is distributed WITHOUT ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING OF MERCHANTABILITY, SATISFACTORY QUALITY AND FITNESS FOR A PARTICULAR PURPOSE.

Please see the CERN-OHL-S v2 for applicable conditions.
Source location:
https://github.com/Riesi/ploopy_mouse_kicad

As per CERN-OHL-S v2 section 4, should You produce hardware based on this source, You must where practicable maintain the Source Location visible on the external case of the Ploopy Mouse or other products you make using this source.


| | |
|---|-----------------------|
| Original: Copyright Ploopy Corporation 2021 Modified: Copyright Riesi 2023 | |
| Licensed under the CERN-OHL-S v2 http://ohwr.org/cernohl | |
| Sheet: / File: QMKMouse.kicad_sch | |
| Title: QMKMouse-SchDoc | |
| Size: A4 | Date: 17 01 2023 |
| KiCad E.D.A. kicad (6.0.10) | Rev: 2.001 Id: 1/9 |

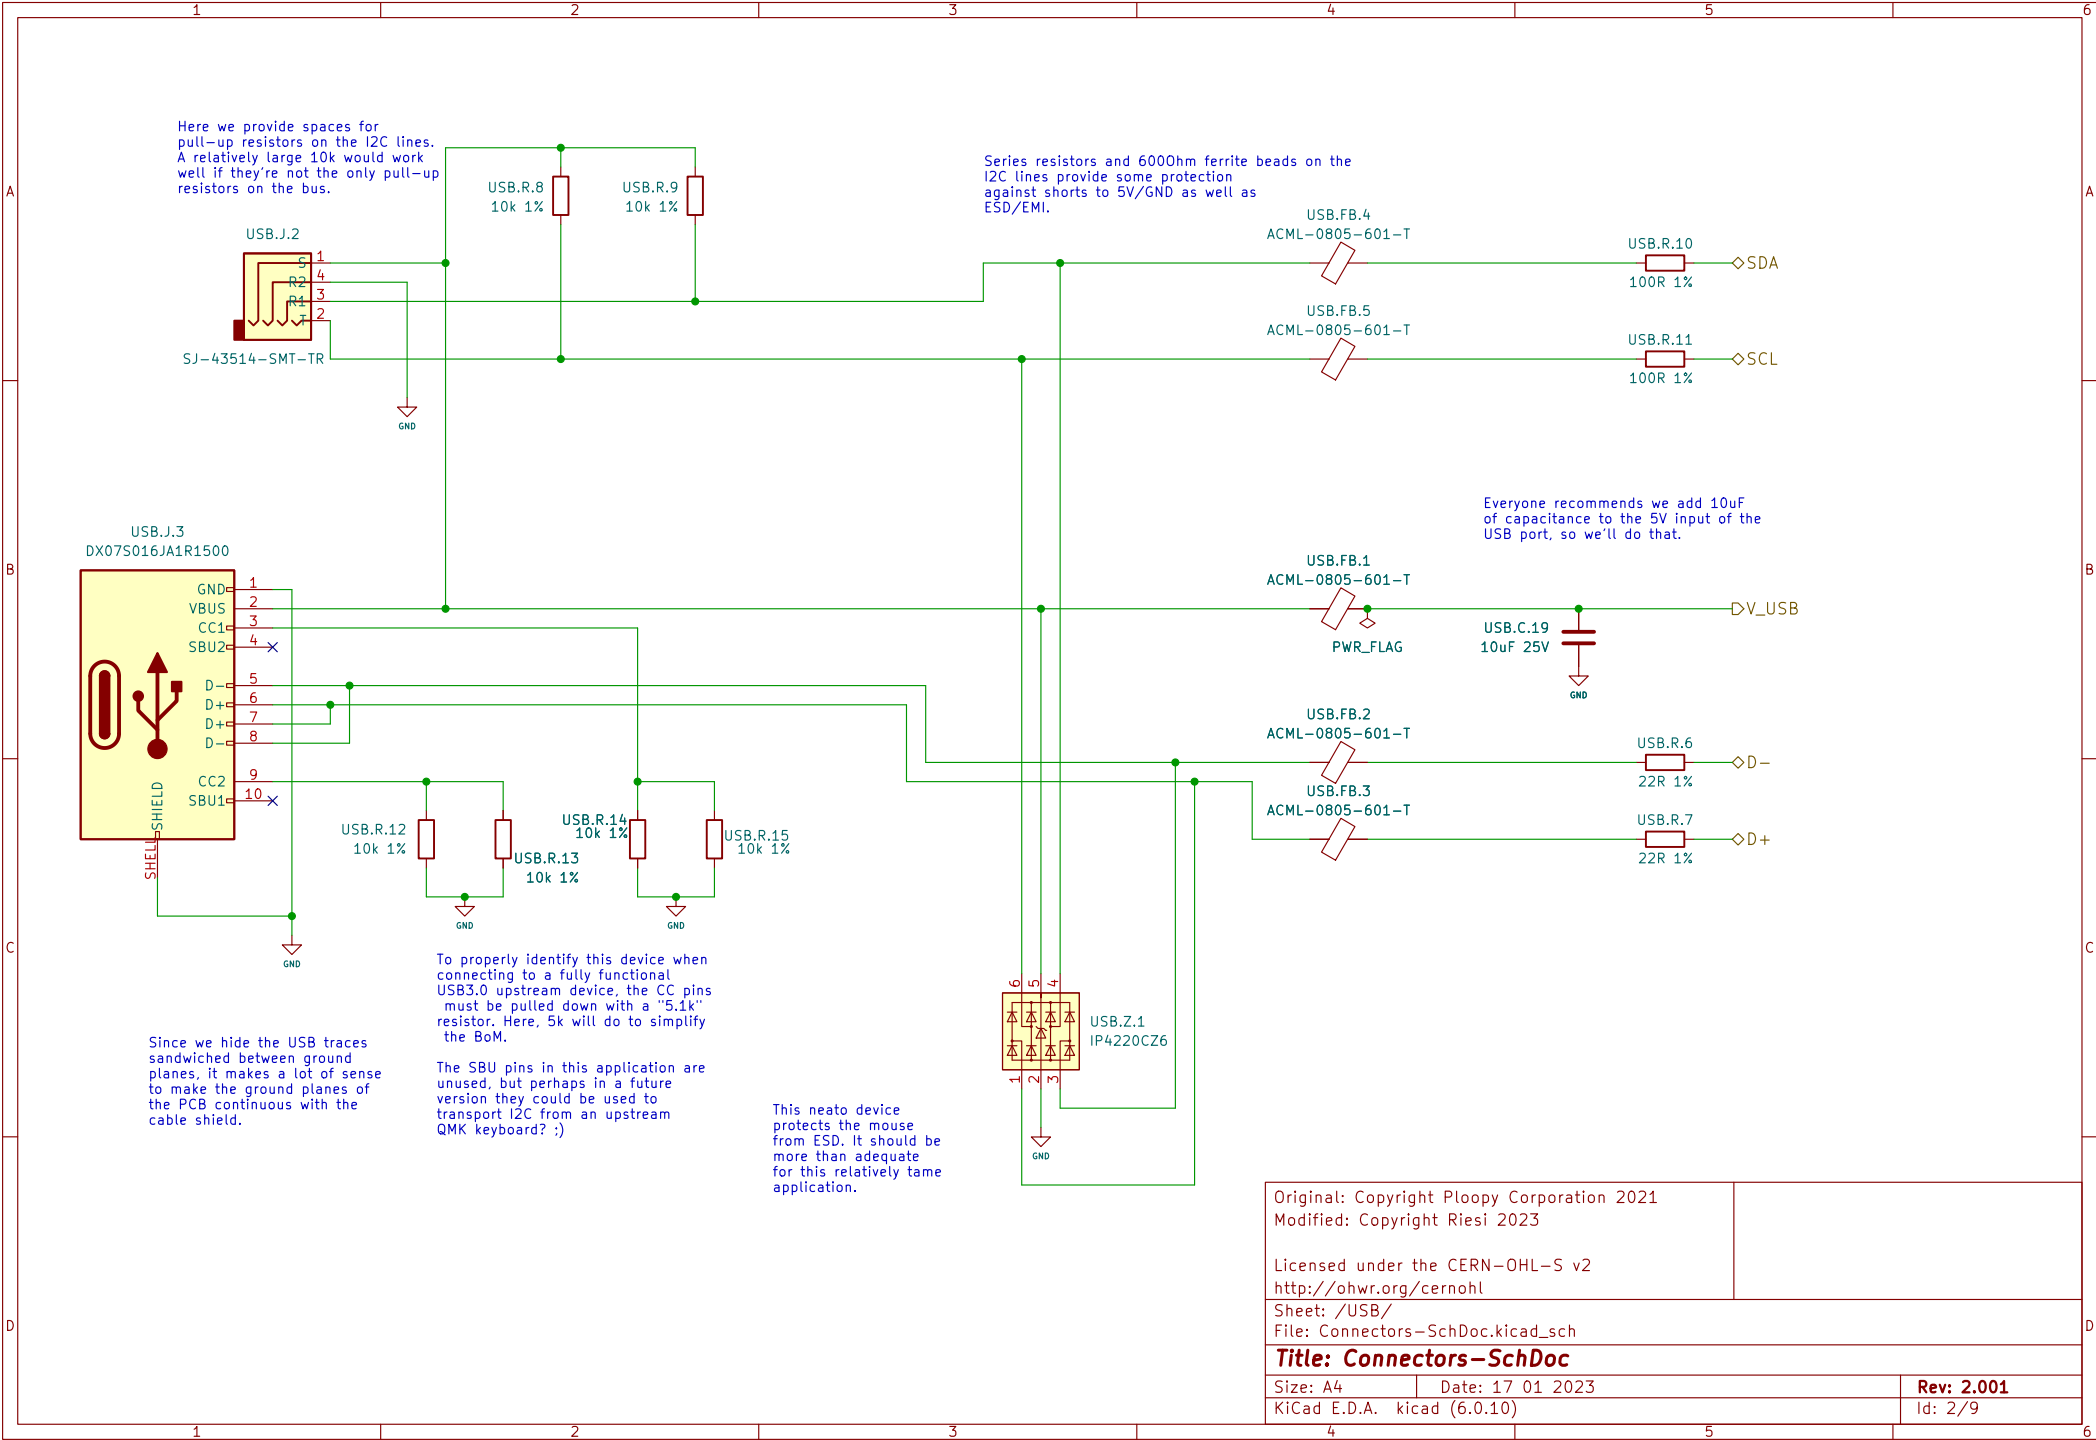

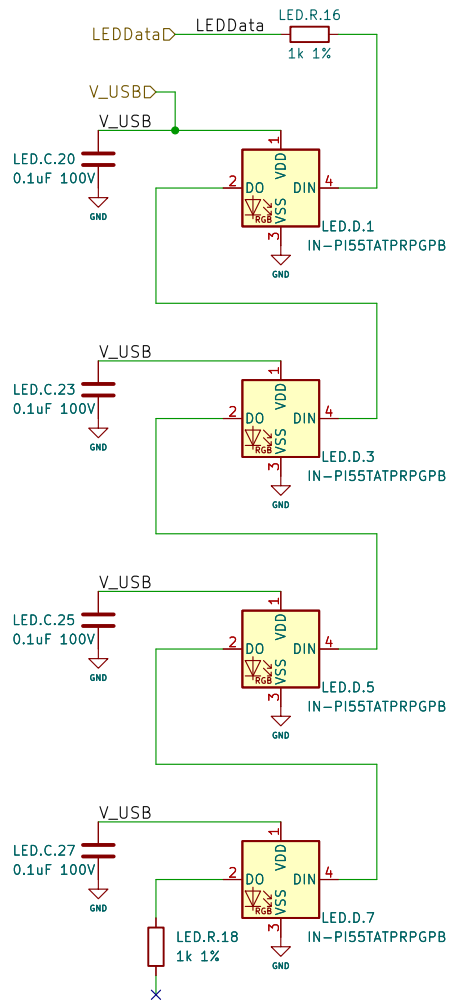

There are two LED strips laid out, one on the top of the board and another on the bottom.

From the factory, only the top strip is populated. If you want, you can populate the bottom strip to get extra lights going. This would allow for lighting to shine through if you also use a translucent bottom cover on the mouse.

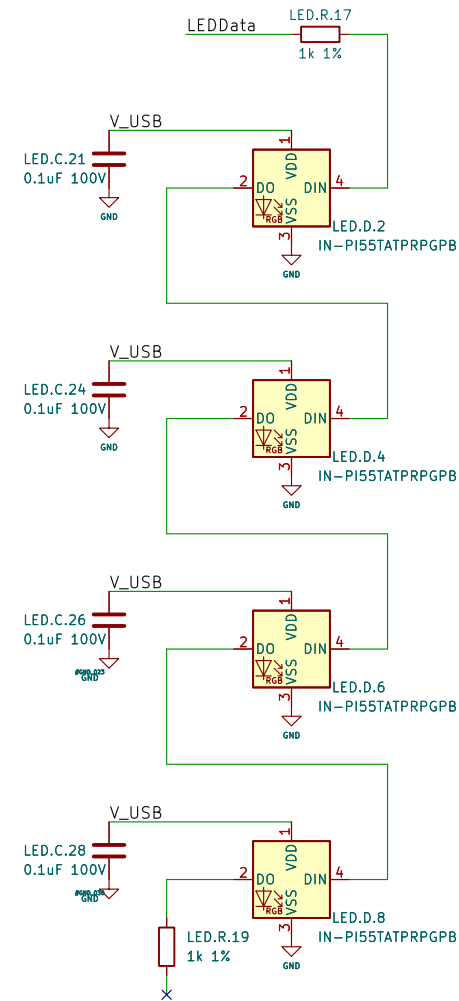

Original: Copyright Ploopy Corporation 2021
Modified: Copyright Riesi 2023

Licensed under the CERN-OHL-S v2
<http://ohwr.org/cernohl>

Sheet: /LED/
File: LEDs-SchDoc.kicad_sch


Title: LEDs-SchDoc

Size: A4 Date: 17 01 2023





KiCad E.D.A. kicad (6.0.10)

Rev: 2.001

Id: 3/9

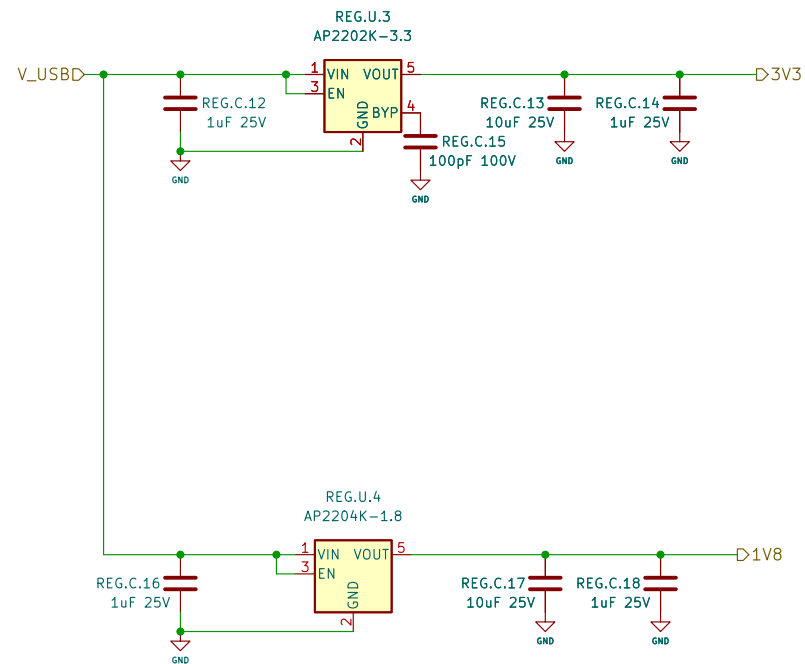

| | | |
|---|------------------|-------------------|
| Original: Copyright Ploopy Corporation 2021 Modified: Copyright Riesi 2023 | | |
| Licensed under the CERN-OHL-S v2 http://ohwr.org/cernohl | | |
| Sheet: /REG/ File: Regulators-SchDoc.kicad_sch | | |
| Title: Regulators-SchDoc | | |
| Size: A4 | Date: 17 01 2023 | Rev: 2.001 |
| KiCad E.D.A. kicad (6.0.10) | | Id: 4/9 |

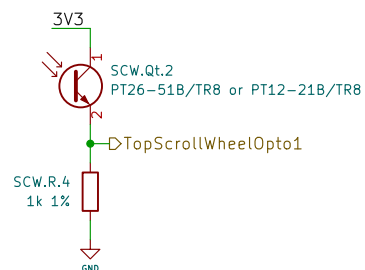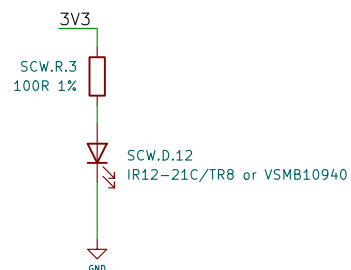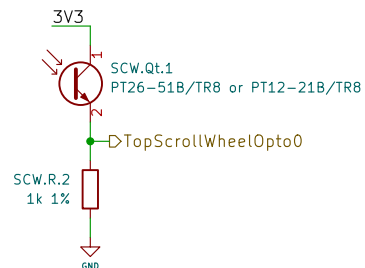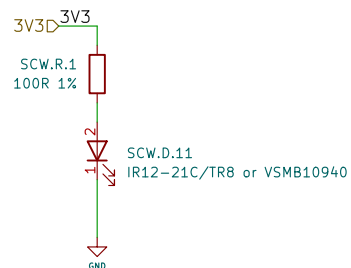

The scroll wheel mechanism is a 2-bit optical encoder. The light paths are spaced 1.5 periods over the encoder wheel holes, which should allow for the detection of the rotation direction as well as the rotation itself.

Two IR LEDs are used as light sources; the light from these is obstructed by the encoder wheel built into the scroll wheel mechanism. Two phototransistors are used to detect when the light is blocked/not blocked by the wheel.


Typical LED forward voltage is 1.3V @20mA. To achieve this current level with a 3.3V supply, we'll use a 100R resistor, which is very convenient.

At this power level, the output should be approx 2.3mW/sr.


Since the light path distance is about 12mm, that works out to about 2mW/cm², though the actual delivered power will be lower due to the vagaries of the obstructions in the mechanism.

With this amount of light (and accounting for the fact that we'll probably lose a lot of it along the way), we are expecting 1-3mA out of the phototransistor (see figure 6 of the datasheet), so we size the biasing resistor accordingly to produce a useful signal.

| | | |
|---|------------------|-------------------|
| Original: Copyright Ploopy Corporation 2021 Modified: Copyright Riesi 2023 | | |
| Licensed under the CERN-OHL-S v2 http://ohwr.org/cernohl | | |
| Sheet: /SCW/ File: ScrollWheel-SchDoc.kicad_sch | | |
| Title: ScrollWheel-SchDoc | | |
| Size: A4 | Date: 17 01 2023 | Rev: 2.001 |
| KiCad E.D.A. kicad (6.0.10) | | Id: 5/9 |

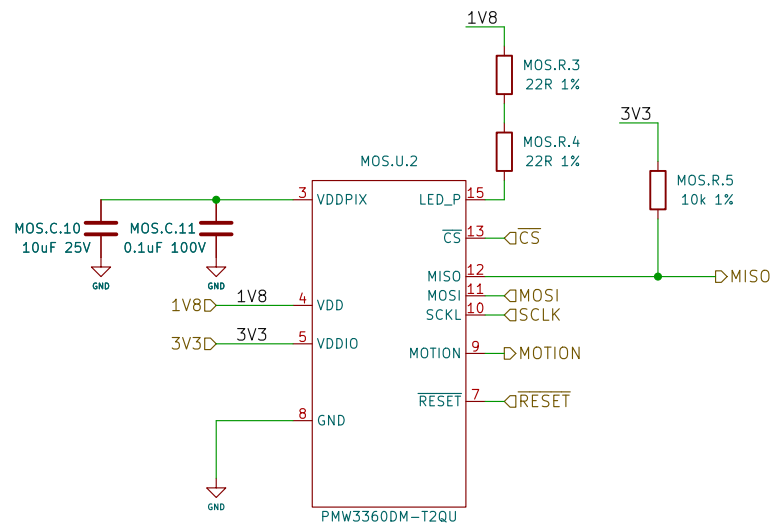

| | | |
|---|------------------|------------|
| Original: Copyright Ploopy Corporation 2021 Modified: Copyright Riesi 2023 | | |
| Licensed under the CERN-OHL-S v2 http://ohwr.org/cernohl | | |
| Sheet: /MOS/ File: MouseSensor-SchDoc.kicad_sch | | |
| Title: MouseSensor-SchDoc | | |
| Size: A4 | Date: 17 01 2023 | Rev: 2.001 |
| KiCad E.D.A. kicad (6.0.10) | | Id: 6/9 |

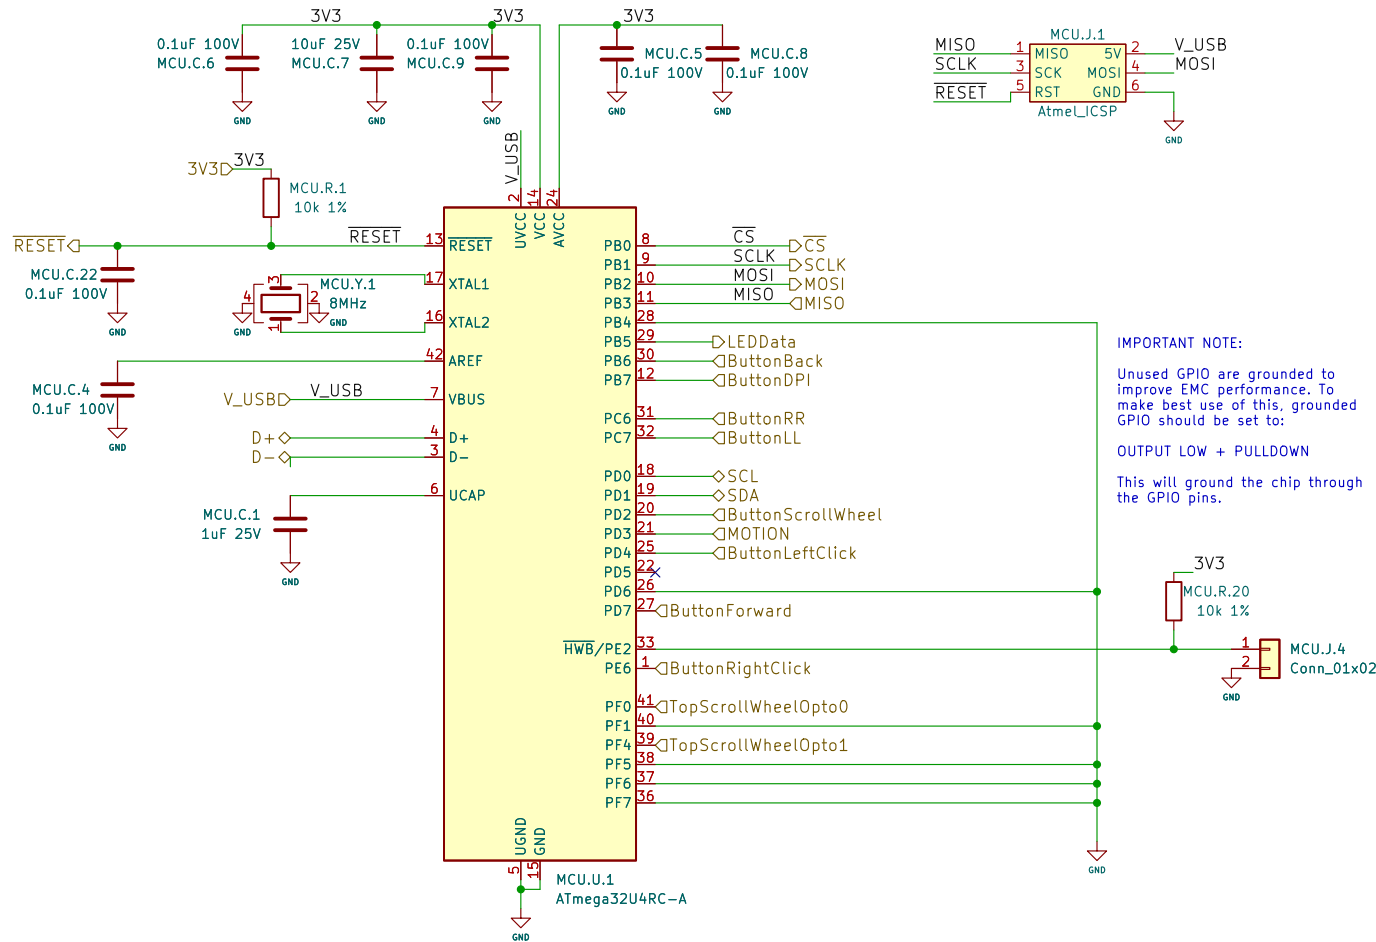

The RC variant only means that the internal 8MHz oscillator is enabled by default and that the divider is set so that it results in 1MHz system clock. This is important if we don't supply an external oscillator otherwise we can not program it.

https://ww1.microchip.com/downloads/en/DeviceDoc/Atmel-7766-8-bit-AVR-ATmega16U4-32U4_Datasheet.pdf#G4.1055626

Original: Copyright Ploopy Corporation 2021
Modified: Copyright Riesi 2023

Licensed under the CERN-OHL-S v2
<http://ohwr.org/cernohl>

Sheet: /MCU/
File: MCU-SchDoc.kicad_sch


Title: MCU-SchDoc

Size: A4 Date: 17 01 2023

KiCad E.D.A. kicad (6.0.10)


Rev: 2.001

Id: 7/9

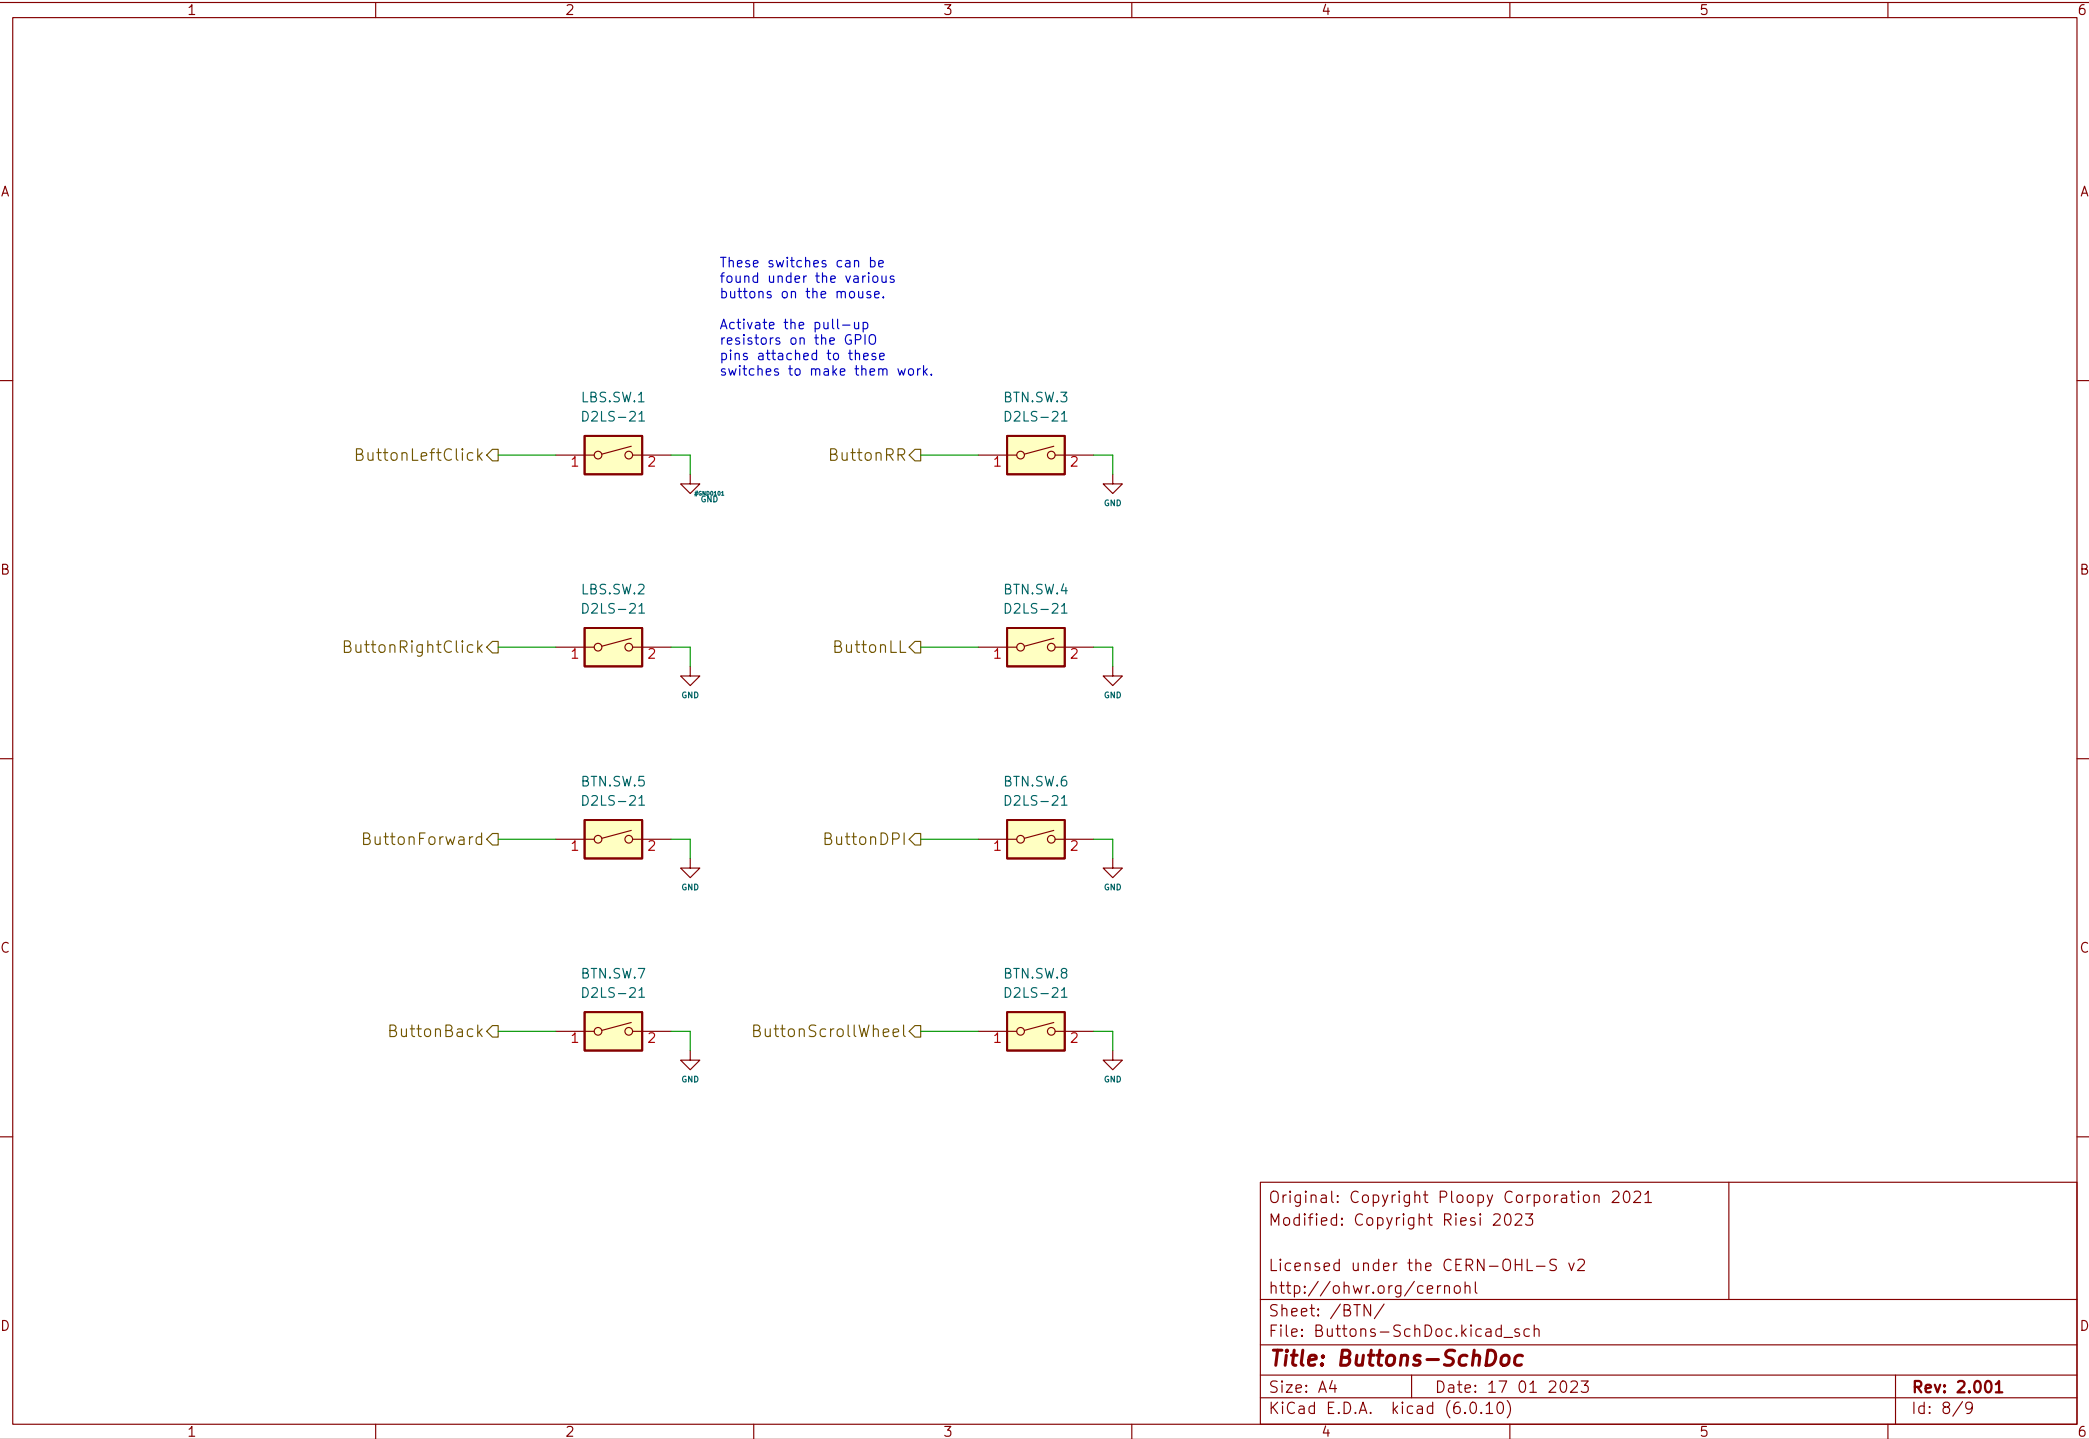


| | | |
|---|------------------|------------|
| Original: Copyright Ploopy Corporation 2021 Modified: Copyright Riesi 2023 | | |
| Licensed under the CERN-OHL-S v2 http://ohwr.org/cernohl | | |
| Sheet: /BTN/ File: Buttons-SchDoc.kicad_sch | | |
| Title: Buttons-SchDoc | | |
| Size: A4 | Date: 17 01 2023 | Rev: 2.001 |
| KiCad E.D.A. kicad (6.0.10) | | Id: 8/9 |

Pick and Place Fiducials

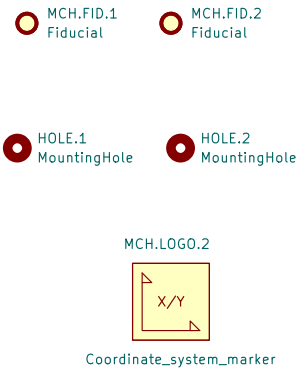

Spark Gaps -- Case

Since the case has gaps in it, we expect ESD to worm its way in via creepage and perhaps other ways. To protect the board from this eventuality, we place spark gaps along the edges.

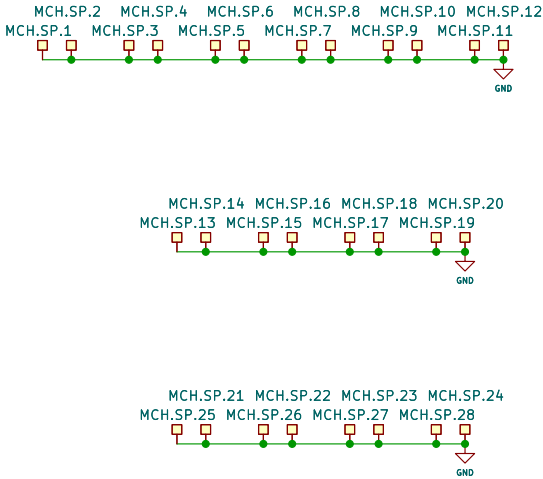

| | | |
|---|------------------|-------------------|
| Original: Copyright Poopy Corporation 2021 Modified: Copyright Riesi 2023 | | |
| Licensed under the CERN-OHL-S v2 http://ohwr.org/cernohl | | |
| Sheet: /MCH/ File: Mechanical-SchDoc.kicad_sch | | |
| Title: Mechanical-SchDoc | | |
| Size: A4 | Date: 17 01 2023 | Rev: 2.001 |
| KiCad E.D.A. kicad (6.0.10) | | Id: 9/9 |