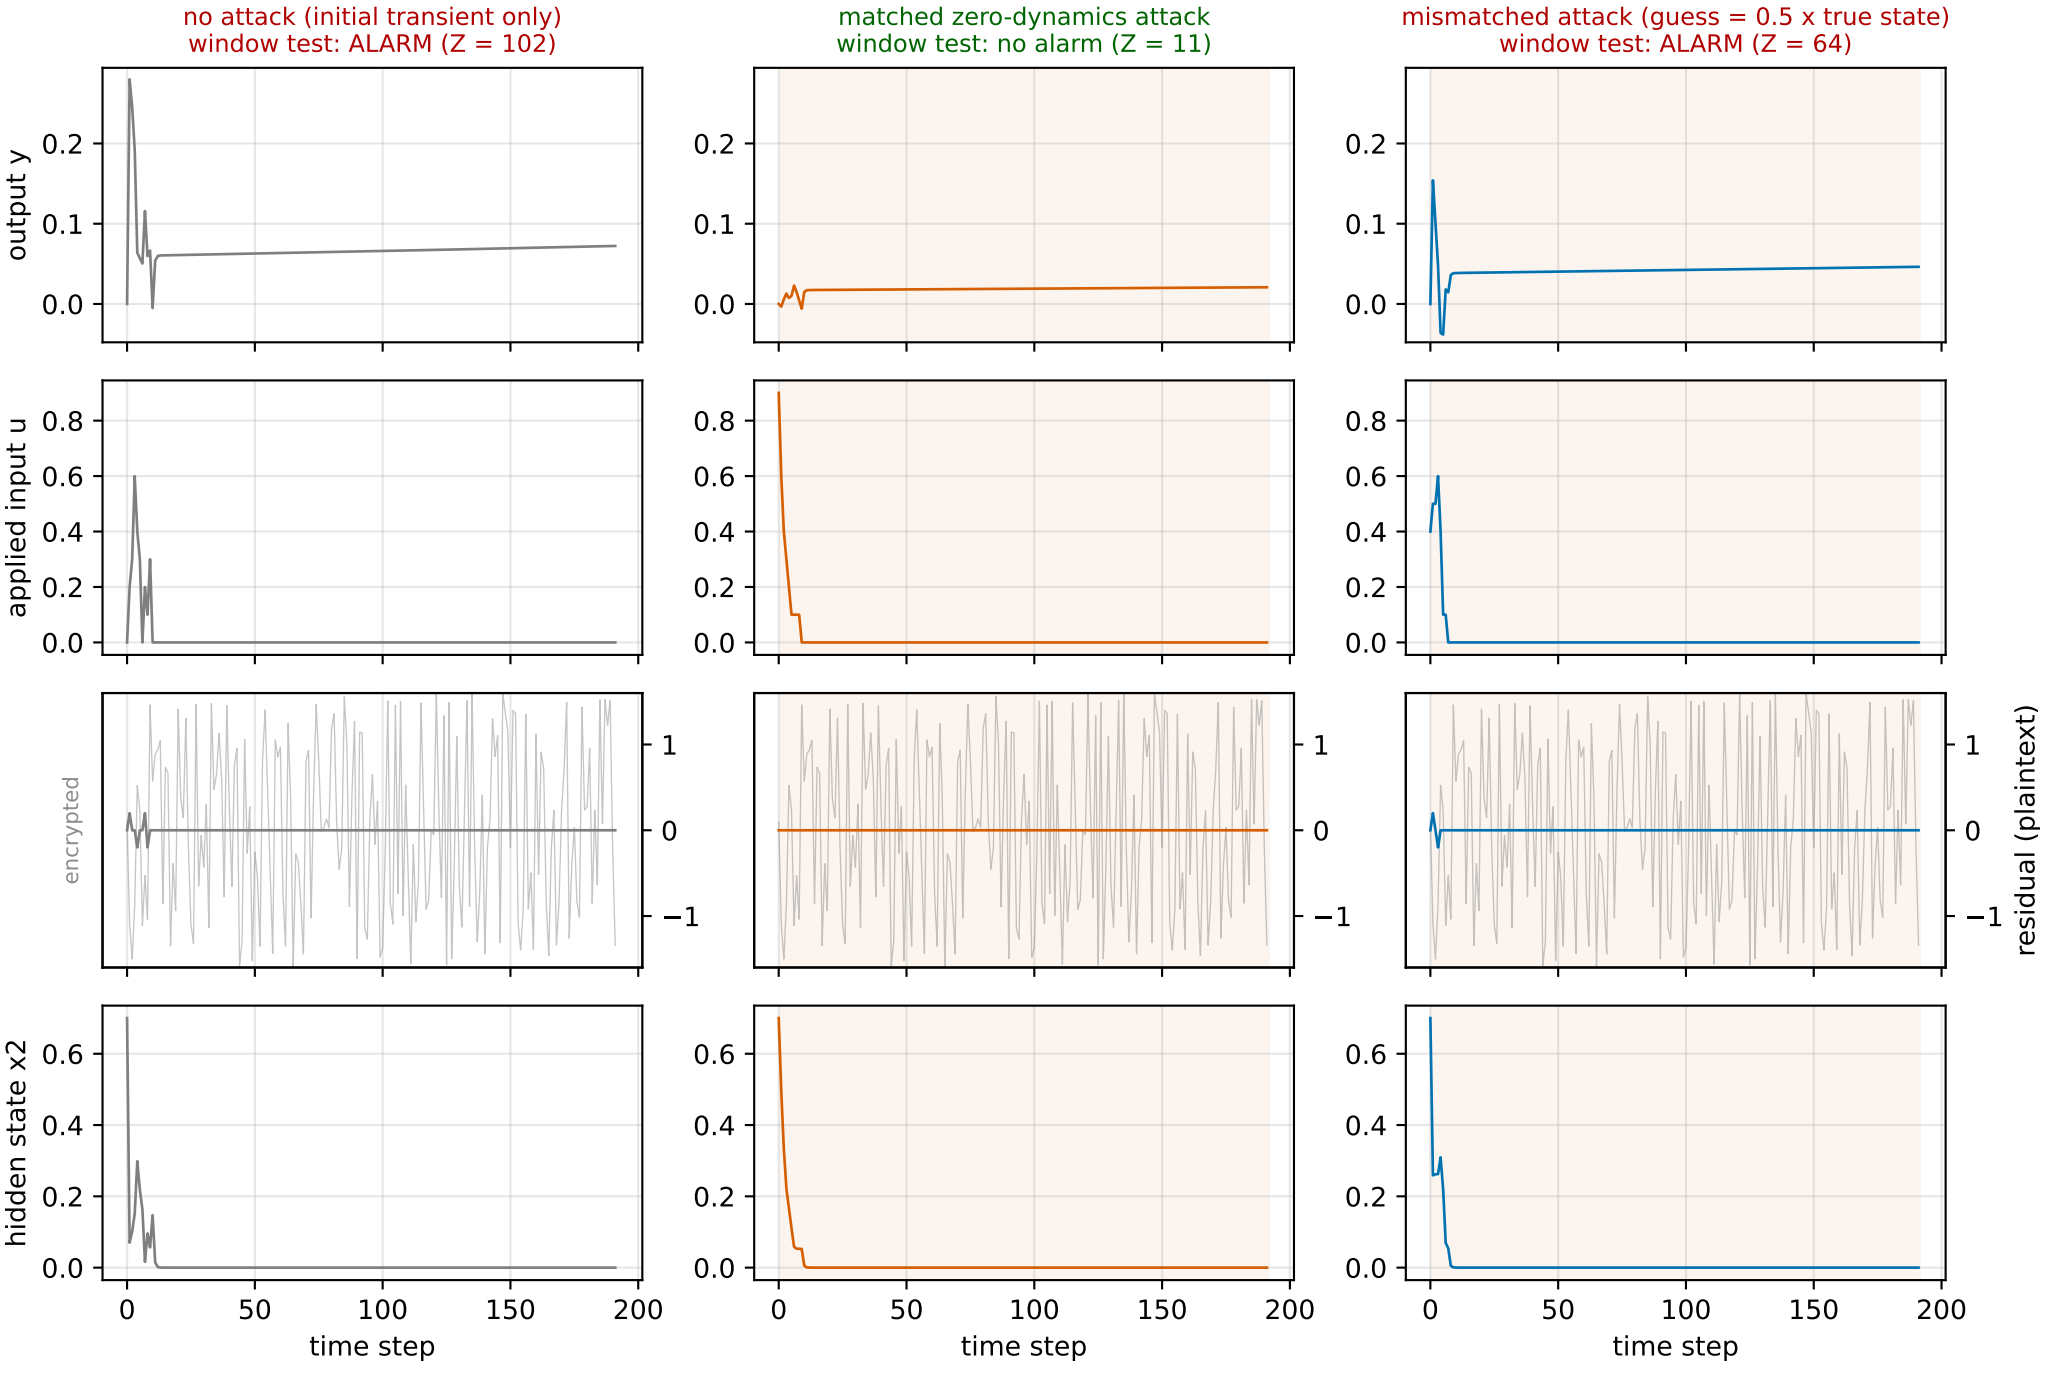
Zero-dynamics attack, stable zero (z0 = 0.7), encrypted control, AERO2 parameters
no attack (initial transient only)
window test: ALARM (Z = 102)
matched zero-dynamics attack
window test: no alarm (Z = 11)
mismatched attack (guess = 0.5 x true state)
window test: ALARM (Z = 64)
output y
applied input u
encrypted
residual (plaintext)
hidden state x2
time step
time step
time step