



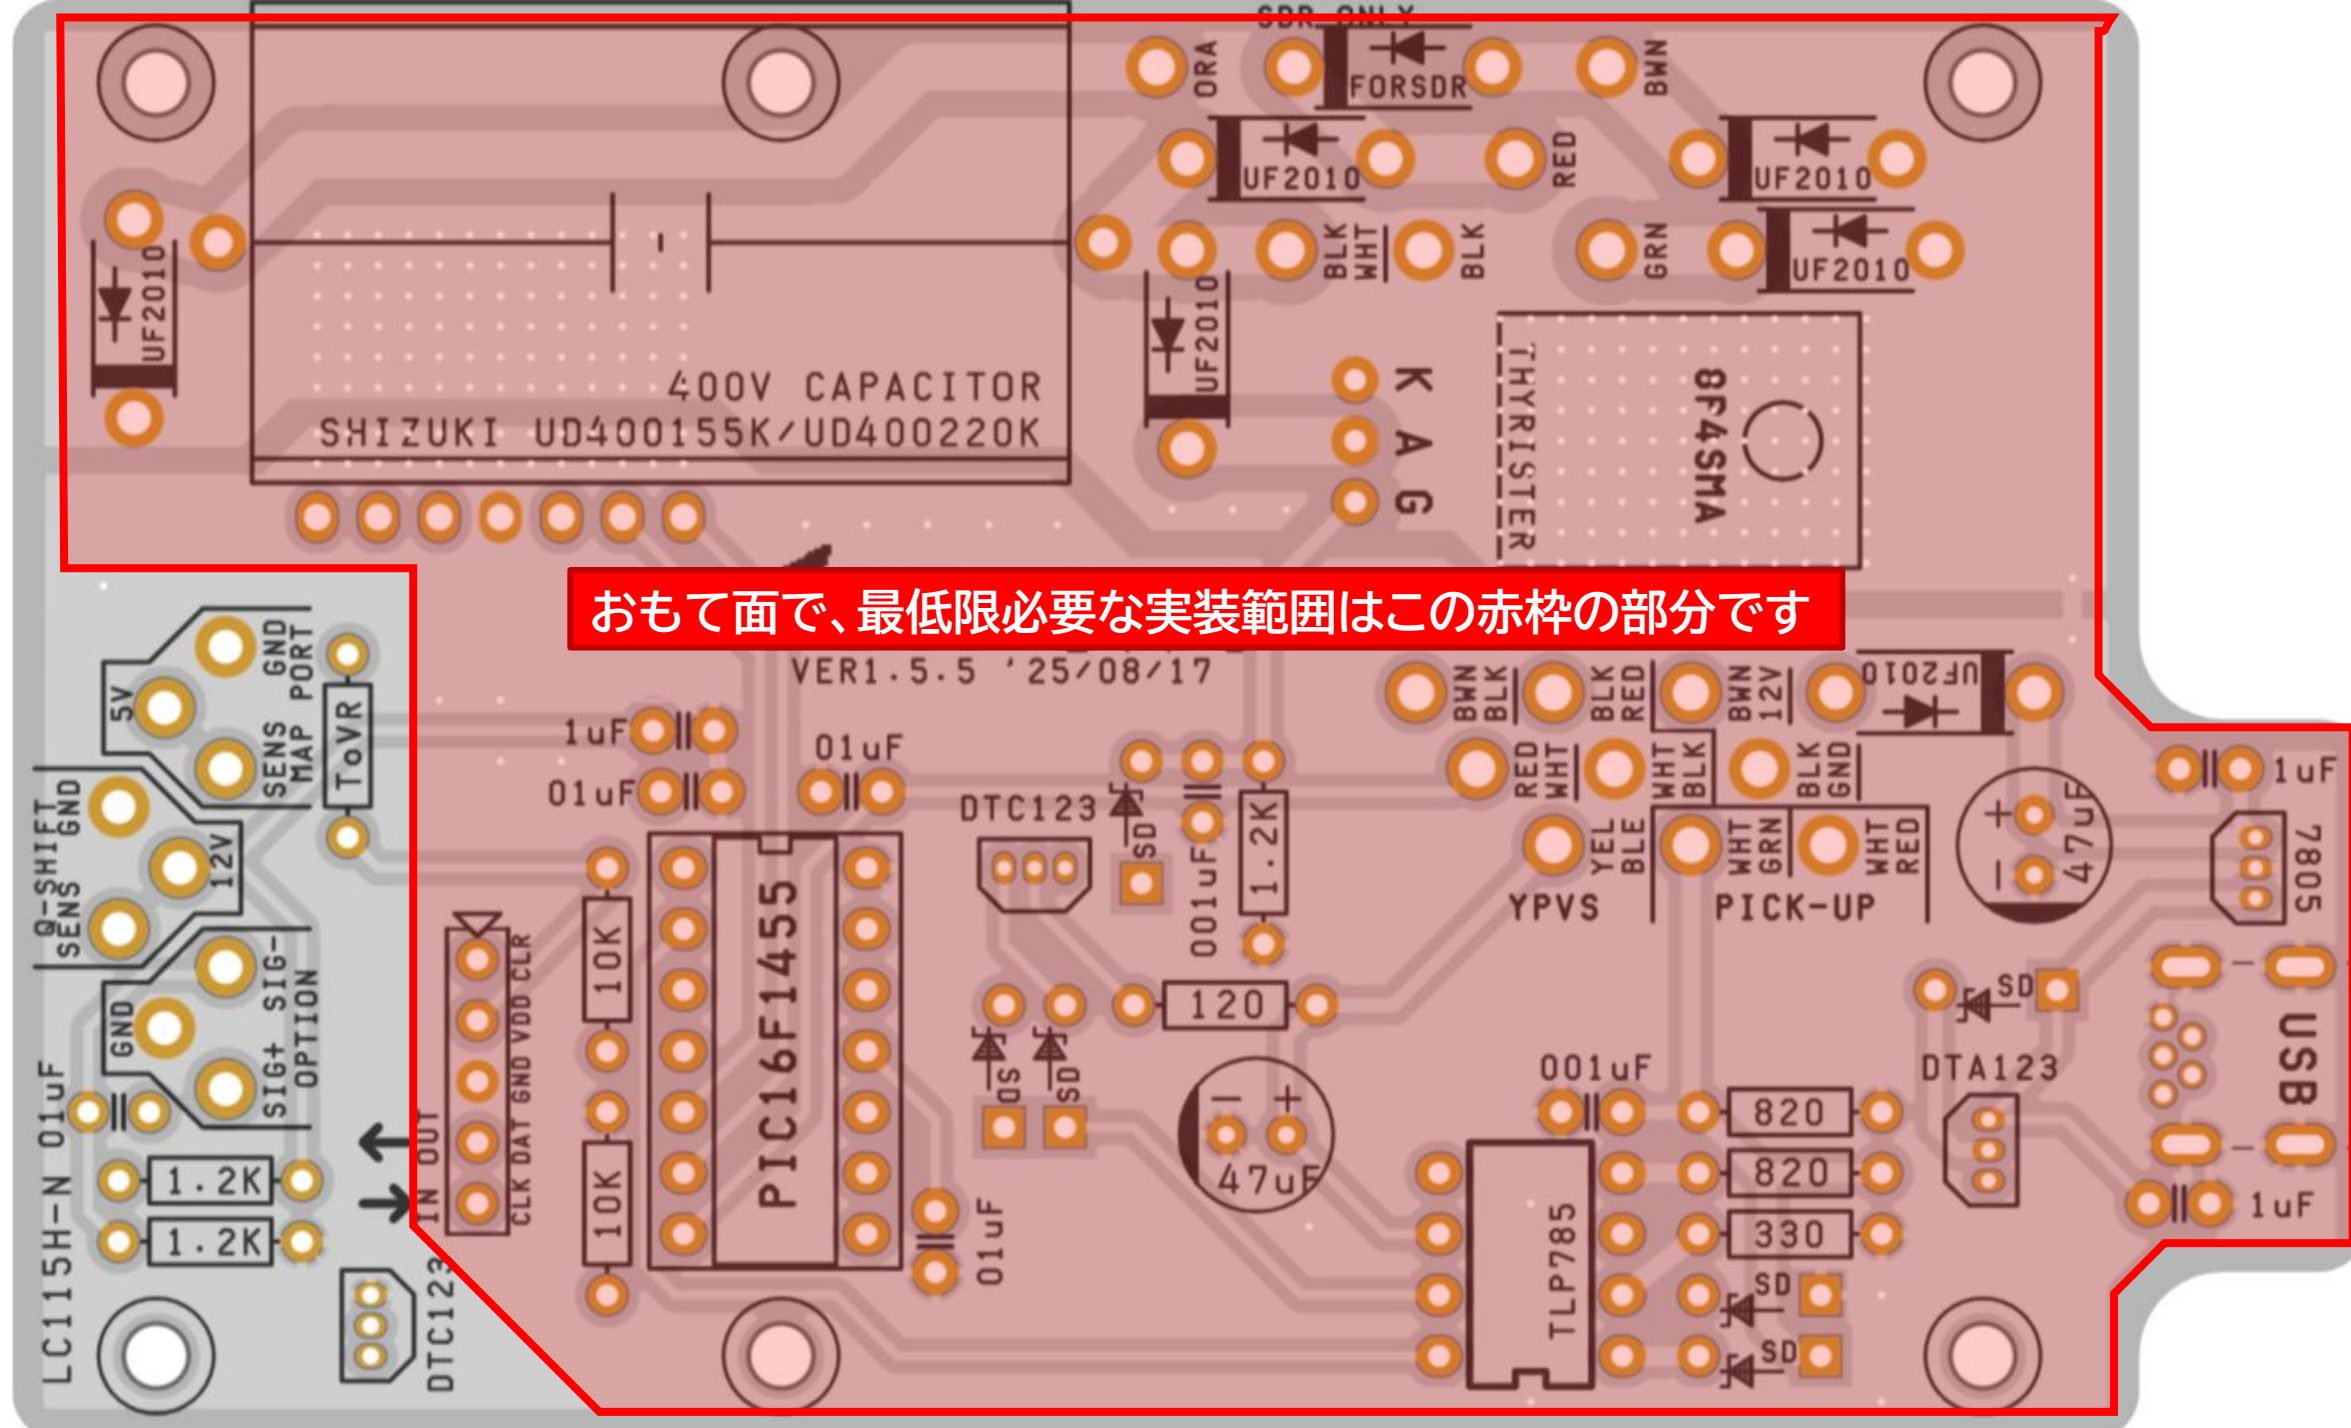

おもて面で、最低限必要な実装範囲はこの赤枠の部分です

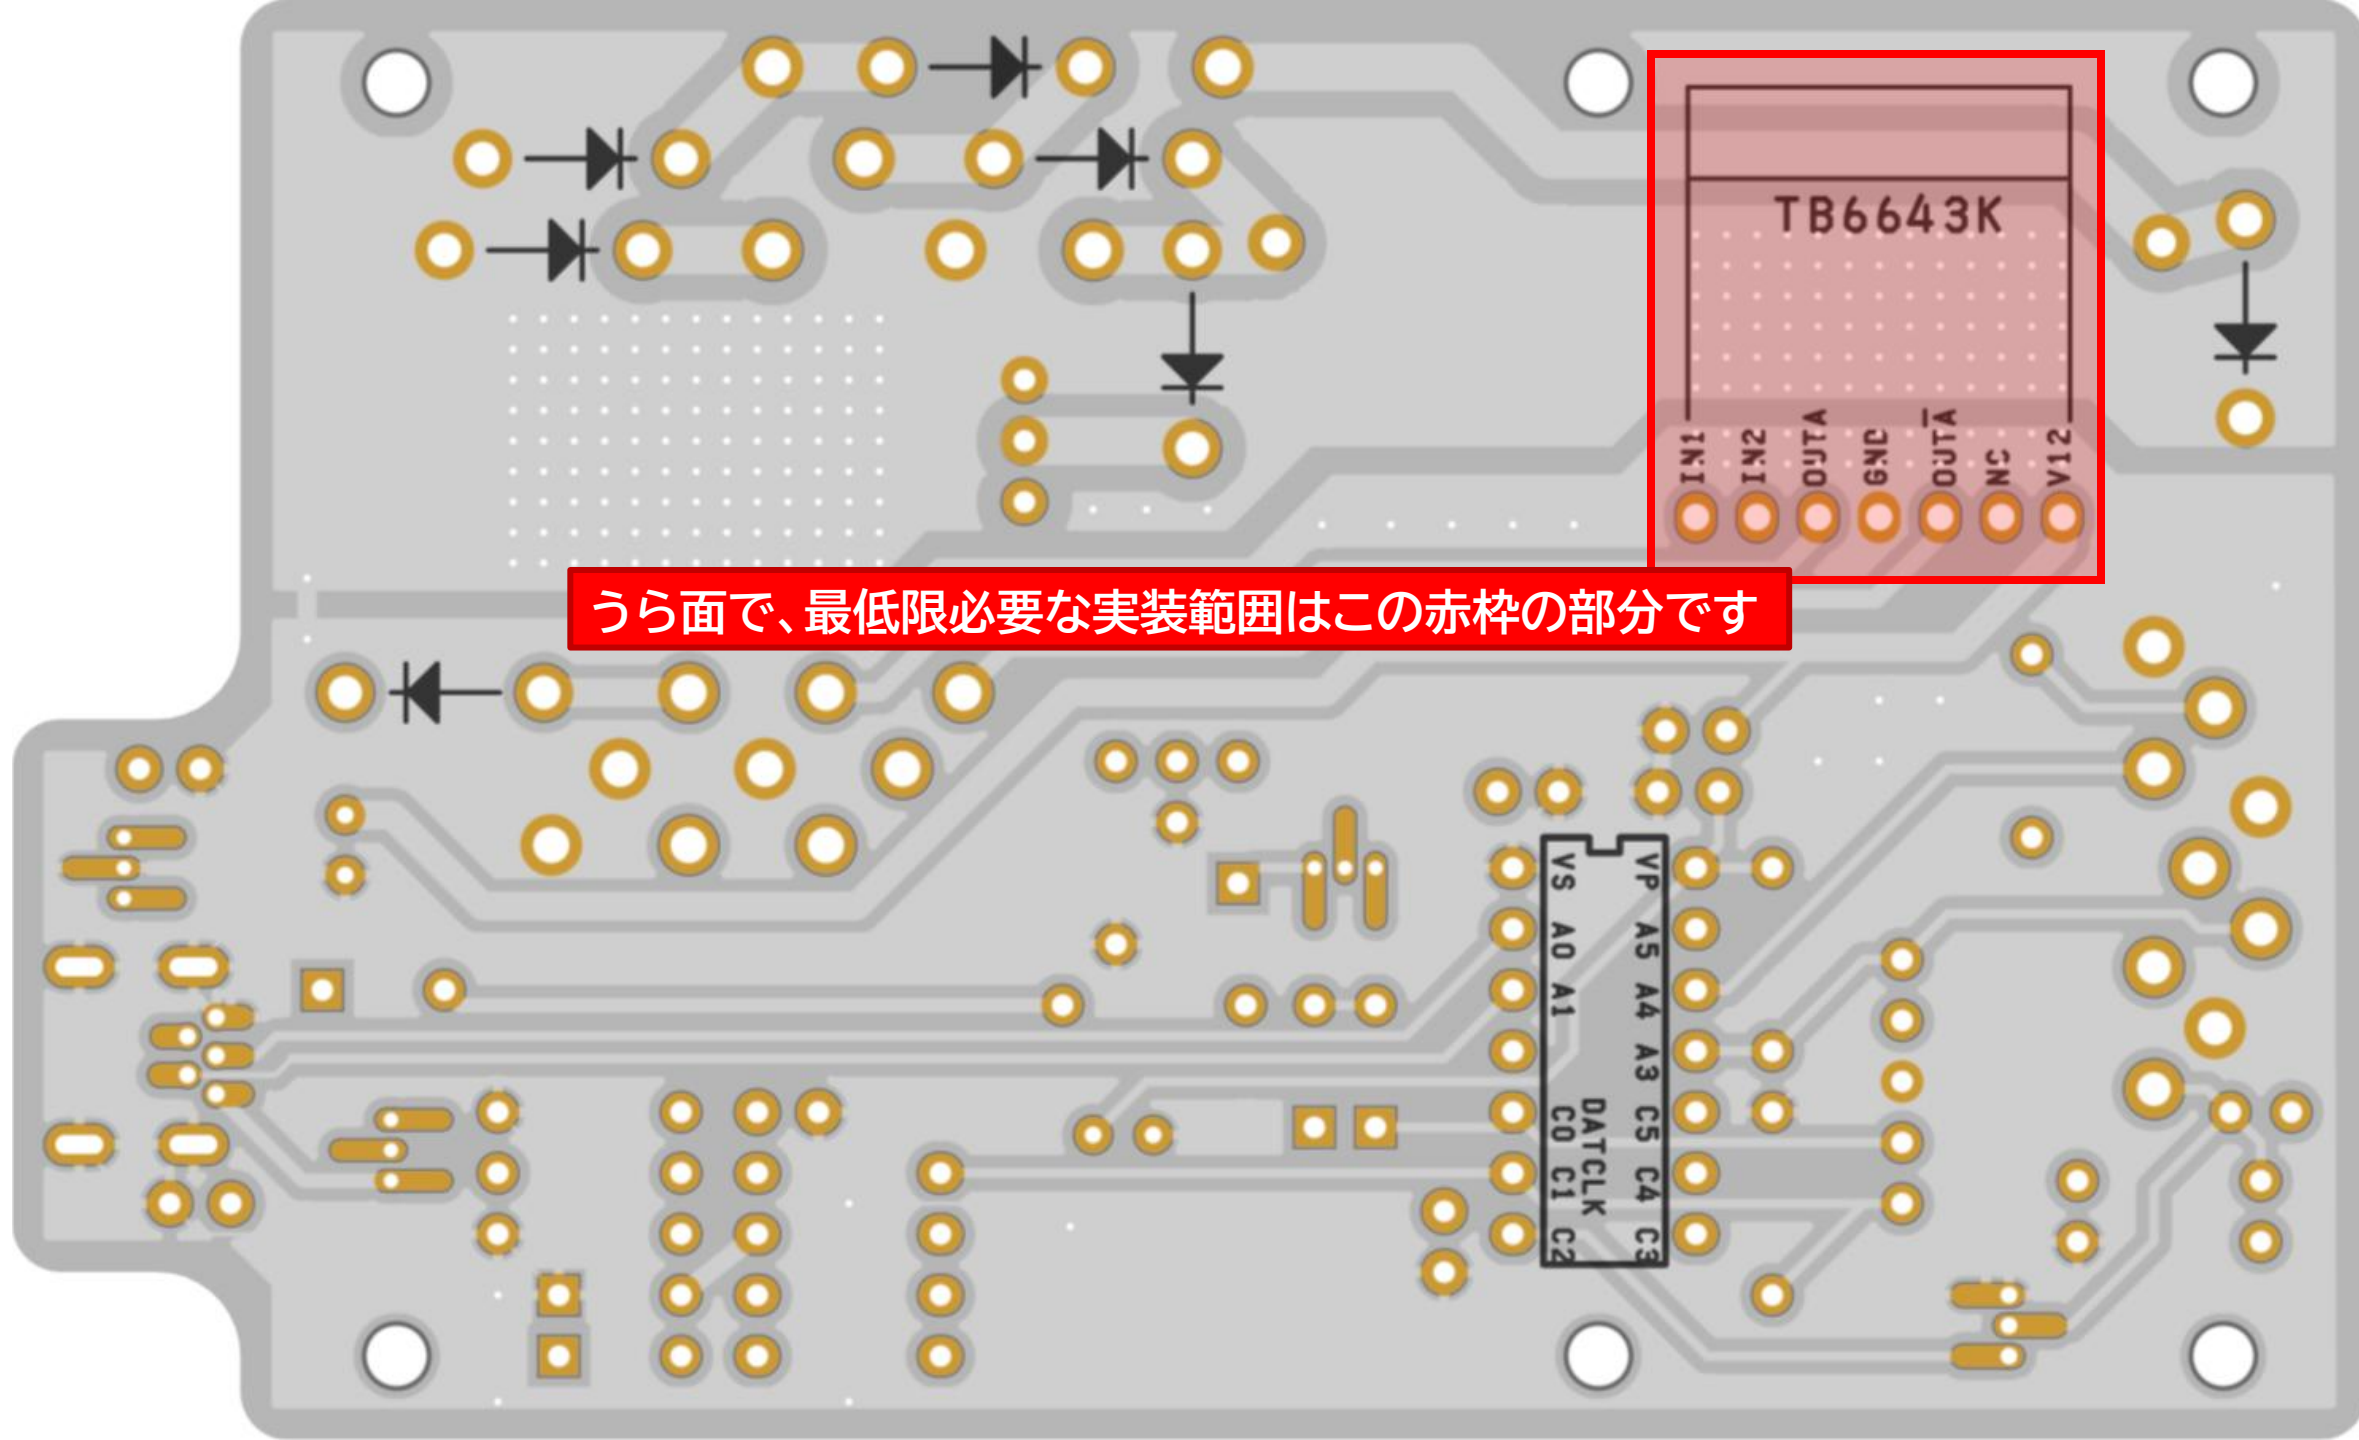

OSR-CDI

VER1.5.5 '25/08/17

SDRのみ必要です



400V CAPACITOR
SHIZUKI UD400155K/UD400220K

8F45MA
THYRISTER

PIC16F1455

TLP785

LC115H-N 01uF
9-SHIFT
SENS GND
12V
SIG+ SIG-
OPTION
GND
1.2K
1.2K
DTC123
IN OUT
CLK DAT GND VDD CLR
ToVR
SENS GND
MAP PORT
5V

YPVS
PICK-UP
12V
GND
WHT RED
WHT BLK
WHT GRN
WHT BLK
YEL BLE
RED WHT
BLK BLK
BWN BLK

7805
USB
1uF
47uF
001uF
820
820
330
DTA123
DTC123
01uF
1.2K
120
001uF
1.2K
01uF
01uF
10K
10K

