

LED POLE LIGHT 320W DIFFUSER

Application

It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Hotels, Schools, Hospitals, etc...

Technical Data:

Power Source: 240-200 VAC 60/50HZ

Power Supply: Tridonic


LED Type: Osram SMD 2835

IK Code: IK08

Dimmable: no (can be dimmable on request)

Low tolerances for colour temperature: MacAdam3

Humidity Storage: %80-100

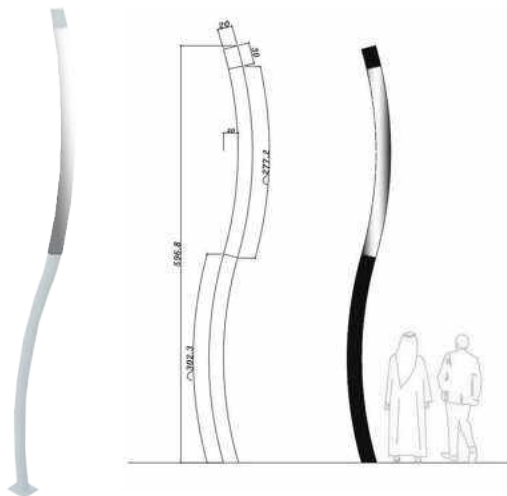

SPECIFICATIONS

ITEM	DESCRIPTION
Input Voltage	220-240VAC
Frequency	50/60Hz
LED Type	Osram
Power Supply	Tridonic
CRI	80%
LED Efficiency	120-130Lm/W
Power Factor	98%
Materials	Extruded Aluminum Pole, PC, Die cast Aluminium & Friendly material
CCT	3000k, 4000k, 5000k, 6000k
Life Time	>50,000 Hours
Operating Temperature	-20°C to +55°C
Storage Temperature	-40°C to +65°C
Certification	CE, SELV, AND ISO
Mounting	Ground
IP Rating	IP 65

Order code	Dimensions(mm)	Power(Watt)	Lumen
NSL-DEC-POL-CUR-320W-XXK-CV24-TD-IP65	5968x200x200mm	320	27200

Application

It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Hotels, Schools, Hospitals, etc...

Technical Data:

Power Source: 240-220 VAC 50/60HZ

Power Supply: Nassli

LED Type: Osram SMD 2835

IK Code: IK08

Dimmable: no (can be dimmable on request)

Low tolerances for colour temperature: MacAdam3

Humidity Storage: 10-80%



SPECIFICATIONS

ITEM	DESCRIPTION
Input Voltage	240-220 VAC
Frequency	60/50 Hz
LED Type	OSRAM SMD 2835
Power	80W
Power supply	Nassli
Flux	9600 Lm
CRI	80%
LED Efficiency	120-130Lm/W
Materials	Extruded Aluminum Pole, PC, Die cast Aluminium & Friendly material
Power factor	< 98%
CCT	3000K, 4000K, 5000K 6000K
Life Time	>50,000 Hour
Operating Temperature	-20°C to +55°C
Storage Temperature	-40°C to +65°C
Certifications	CE, SELV and ISO
Size	5968x200x200mm
Mounting	Ground
IP Rating	IP65

Order code	Color Temperature	Power
NSL-DEC-POL-CUR80-W-XXK-CV-24TF-XX-IP65	3000k, 4000K, 5000K, 6000	80 Watt