



nassli
LED LIGHTS

NSL-DECPL-KD-MASAR-4.45M

Application

It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Hotels, Schools, Hospitals, etc...

Technical Data:

Power Source: 240-200 VAC 60/50HZ

Power Supply: Nassli

LED Type: Osram SMD 2835

IK Code: IK08


Dimmable: no (can be dimmable on request)

Low tolerances for colour temperature: MacAdam3

Humidity Storage: %80-10

Aluminium Thickness: 4mm

This area will be one color

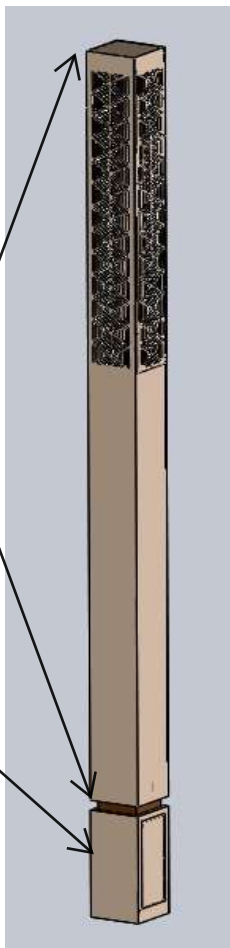

This area will be one color

SPECIFICATIONS

ITEM	DESCRIPTION
Input Voltage	220-240VAC
Frequency	50/60Hz
LED Type	Osram
Power Supply	Nassli
CRI	80%
LED Efficiency	120-140 Lm/w
Power Factor	98%
Materials	Extruded Aluminum Pole, PC, Die cast Aluminium & Friendly material
CCT	3000K, 4000K, 5000K, 6000K
Life Time	>50,000 Hours
Operating Temperature	-20°C to +55°C
Storage Temperature	-40°C to +65°C
Certification	CE, SELV, AND ISO
Mounting	Ground
IP Rating	IP 65

Order code

Dimensions(mm)

Power(Watt)

Lumen

NSL-DECPL-KD-MASAR-4.45M

4450x250x250mm

120

9000



