



nassli
LED LIGHTS

LED BULKHEAD EXIT LIGHT

Application:

It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room Factories, Theater, Cinemas, Kitchens and Corridor etc...

Feature:

The product used as pure light source, LED line of exit and emergency lighting offer the best in energy efficiency and is perfect for many applications, including damp location. These well designed, units are low maintenance and provide the brightest light while using very little energy, and 24 metre viewing distance.



SPECIFICATIONS

ITEM	DESCRIPTION
Input Voltage	220 - 240 VAC
Frequency	50 / 60 H z
Power factor	>95%
CCT	6000 with Color Stiker
CRI	>80%
Power supply	Nassli / Tridonic
LED Type	Osram
Materials	PC, & Friendly material
Beam Angle	125°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +85°C
Certifications	CE, SELV and ISO
Mounting	Wall Mounted
IP Rating	IP65
Dimmable	No
Emergency	Yes
Warranty	5 Years

Order code	Dimensions(mm)	Power(Watt)
NSL-EXIT-S-WM-4W-SMD-TD-XX-IP65-CBS-R	355x100x55	4
NSL-EXIT-S-WM-4W-SMD-TD-XX-IP65-CBS-L	355x100x55	4
NSL-EXIT-S-WM-4W-SMD-NS-IP65-CBS-R	355x100x55	4
NSL-EXIT-S-WM-4W-SMD-NS-IP65-CBS-L	355x100x55	4



nassli
LED LIGHTS

LED BULKHEAD EXIT LIGHT

Application:

It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room Factories, Theater, Cinemas, Kitchens and Corridor etc...

Feature:

The product used as pure light source, LED line of exit and emergency lighting offer the best in energy efficiency and is perfect for many applications, including damp location. These well designed, units are low maintenance and provide the brightest light while using very little energy, and 24 metre viewing distance.



SPECIFICATIONS

ITEM	DESCRIPTION
Input Voltage	220 - 240 VAC
Frequency	50 / 60 H z
Power factor	>95%
CCT	6000 with Color Stiker
CRI	>80%
Power supply	Nassli
LED Type	Osram
Materials	PC, & Friendly material
Beam Angle	125°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +85°C
Certifications	CE, SELV and ISO
Mounting	Wall Mounted
IP Rating	IP65
Dimmable	No
Emergency	On Request
Warranty	5 Years

Order code	Dimensions(mm)	Power(Watt)
NSL-EXIT-S-WM-4W-SMD-NS-IP65-R	355x100x55	4
NSL-EXIT-S-WM-4W-SMD-NS-IP65-L	355x100x55	4



NASSLI
LED LIGHTS

LED EMERGENCY BULKHEAD

Application:

It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room Factories, Theater, Cinemas and Corridor etc...

Feature:

LED Wall Mounted Light is designed for Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Wall-mounted range of LED products can be used to replace traditional wall-mounted luminaires incorporating compact fluorescent lamps. The Process of selecting, installing and maintaining is so easy it's a simple switch.



SPECIFICATIONS

ITEM	DESCRIPTION
Input Voltage	220 - 240 V A C
Frequency	50 / 60Hz
Power factor	>98%
CCT	6000k
CRI	>80%
LED Efficiency	120-130Lm/W
Power supply	Nassli
LED Type	Osram
Materials	PC, & Friendly material
Beam Angle	125°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +85°C
Certifications	CE,SELV&ISO
Mounting	Wall Mounted / Surface Mounted
IP Rating	IP65
Dimmable	On Request
Emergency	On Request
Warranty	5 Years

Order code	Dimensions(mm)	Power(Watt)
NSL-WML-355-4W-SMD-NS-XXK-IP65	355x100x55	4
NSL-WML-355-4W-SMD-NS-XXK-IP65-EM	355x100x55	4

DATASHEET

LED EMERGENCY BULKHEAD

The emergency bulkhead is suitable for Ceiling or Wall mounted.




Hinged gear tray for easy installation

Can be used in Maintained or Non-maintained mode

Suitable for indoor or outdoor

Dimensions

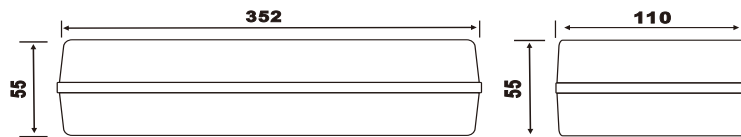

Specification

Model No.:KE298/LED/M	Charging Time:24H
Mode of Operation:Maintained/Non-maintained	Emergency Duration:≥ 3H
Power Consumption:5W	Lumen:220LM (AC), 150LM(DC)
LED Type:SMD2835 27PCS	Working Temperature:0°C - 55°C
CCT:3000-6500K	Materials:PC base &PC diffuser transparent
Ra> 80	Self-Adhesive exit legend Optional
PF:0.5	Test Standard:EN 60598-2-22 EN 60598-1
Battery Type:NI CAD 3.2V 1500mAh	