



nassli
LED LIGHTS


LED EXIT LIGHT SIGN SINGLE

Application:

It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room Factories, Theater, Cinemas, Kitchens and Corridor etc...

Feature:

The product used as pure light source, LED line of exit and emergency lighting offer the best in energy efficiency and is perfect for many applications, including damp location. These well designed, units are low maintenance and provide the brightest light while using very little energy, and 24 metre viewing distance.

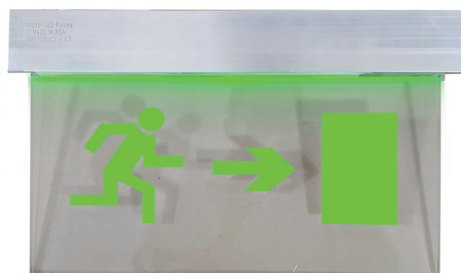

SPECIFICATIONS

ITEM	DESCRIPTION
Input Voltage	220 - 240 V A C
Frequency	50 / 60 H z
Power factor	>95%
CCT	Green
CRI	>83%
Power supply	Nassli
LED Type	Epistar High Power
Materials	Aluminum, PC, & Friendly material
Beam Angle	180°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +65°C
Certifications	CE, SELV and ISO
Mounting	Pendant, Wall Mounted
IP Rating	IP20/40
Dimmable	NO
Emergency	Yes
Warranty	5 Years

Order code	Dimensions(mm)	Power(Watt)
NSL-EXIT-S-SM-5W-HIP-DON-DF-IP20	L33.5 H22	5
NSL-EXIT-S-RE-5W-HIP-DON-DF-IP20	L33.5 H22	5
NSL-EXIT-S-WM-5W-HIP-DON-DF-IP20	L33.5 H22	5
NSL-EXIT-S-SM-5W-HIP-DON-DF-IP40	L33.5 H22	5
NSL-EXIT-S-RE-5W-HIP-DON-DF-IP40	L33.5 H22	5
NSL-EXIT-S-WM-5W-HIP-DON-DF-IP40	L33.5 H22	5



nassli
LED LIGHTS


LED EXIT LIGHT SIGN DOUBLE

Application:

It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room Factories, Theater, Cinemas, Kitchens and Corridor etc...

Feature:



The product used as pure light source, LED line of exit and emergency lighting offer the best in energy efficiency and is perfect for many applications, including damp location. These well designed, units are low maintenance and provide the brightest light while using very little energy, and 24 metre viewing distance.



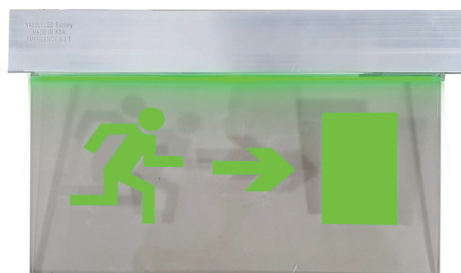


SPECIFICATIONS

ITEM	DESCRIPTION
Input Voltage	220 - 240 V A C
Frequency	50 / 60 H z
Power factor	>95%
CCT	Green
CRI	>83%
Power supply	Nassli
LED Type	Epistar High Power
Materials	Aluminum, PC, & Friendly material
Beam Angle	180°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +65°C
Certifications	CE, SELV and ISO
Mounting	Pendant, Wall Mounted
IP Rating	IP20 / IP40
Dimmable	NO
Emergency	Yes
Warranty	5 Years

Order code	Dimensions(mm)	Power(Watt)
NSL-EXIT-D-SM-5W-HIP-DON-DF-IP20	L33.5 H22	5
NSL-EXIT-D-RE-5W-HIP-DON-DF-IP20	L33.5 H22	5
NSL-EXIT-D-WM-5W-HIP-DON-DF-IP20	L33.5 H22	5
NSL-EXIT-D-SM-5W-HIP-DON-DF-IP40	L33.5 H22	5
NSL-EXIT-D-RE-5W-HIP-DON-DF-IP40	L33.5 H22	5
NSL-EXIT-D-WM-5W-HIP-DON-DF-IP40	L33.5 H22	5

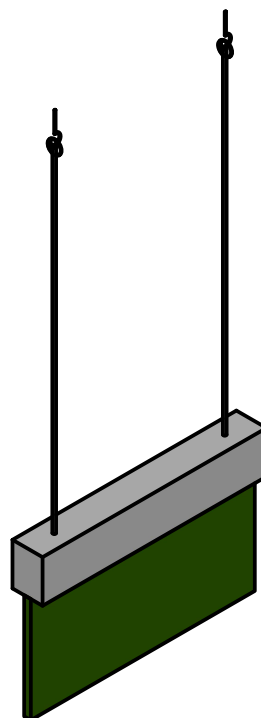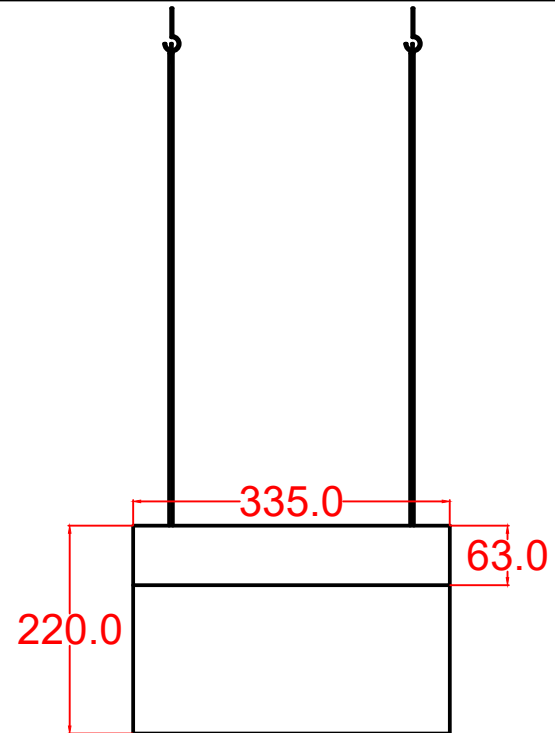

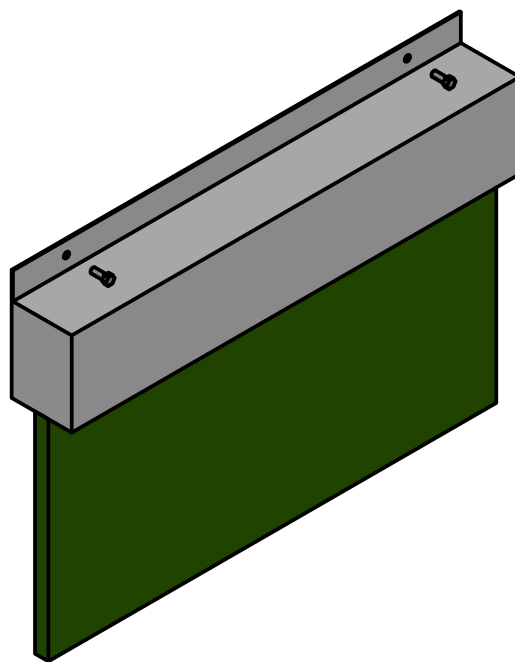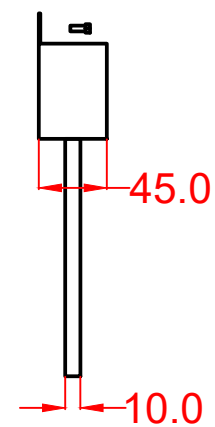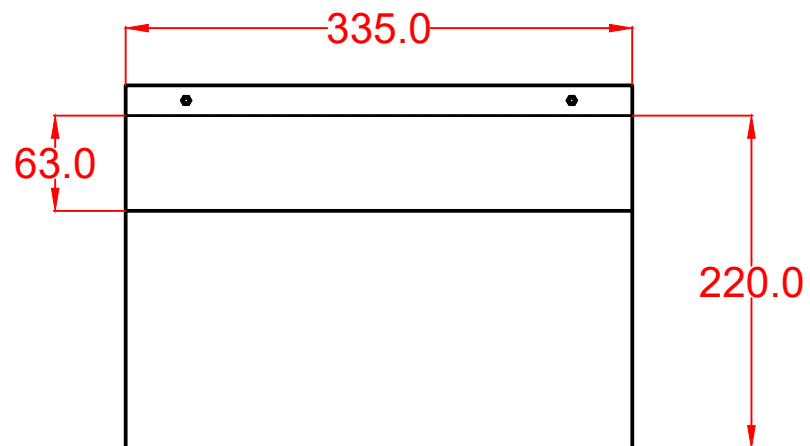

nassli

LED LIGHTS

nassli
LED LIGHTS

LED EMERGENCY BATTERY KIT

Product Description

DF518S Emergency Power Kit is a self-test conversion kits, convert a wide range of LED types. The product can automatically test the Led series and adjust the output voltage to best match between the inverter and the load, providing reduced illumination customized.

The DF518S module is fitting with a microprocessor Self-Test circuit which performs an installation commissioning test, a monthly functional test and an annual full three hour duration test in accordance with BS 5266.

Isolation circuit, IC digital intelligent control system, stable performance.


Applications

Able to covert the most of the common LED lamps from 3W to 40W into emergency backup lights while still maintaining their normal lamp functions.

Features

- Suitable for LED lamps from 3W to 40W and driver the ourput voltage between 9V-60V DC.
- Automatically light up lamp during power blackout, regardless of light is turned ON or OFF.
- Maintenance free, long life span & eco-friendly Lithium battery.
- Light weight and small in size for ease of installation even at areas with limited space.

LED EMERGENCY BATTERY KIT

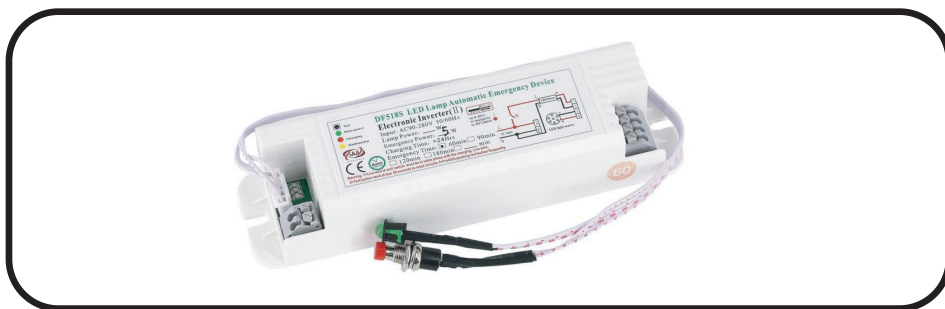

nassli

LED LIGHTS


nassli
LED LIGHTS



LED EMERGENCY BATTERY KIT

Warranty

- 2 year warranty.

Description	Specifications
MODEL	DF518S
Battery Pack	Lithium-ion, 3.7V 15.8Wh
Output Emergency Power	Max.6W, 9V to 60VDC
Input Voltage	AC 90V-280V, 50/60Hz
Protections	Over-voltage, Under-Voltage, Short-circuit
Emergency duration	1.5~3hours with customized
Work temperature	0°C to 50°C
Dimension	150X40X30mm
Weight	200g
Function	Selftest with monthly and yearly

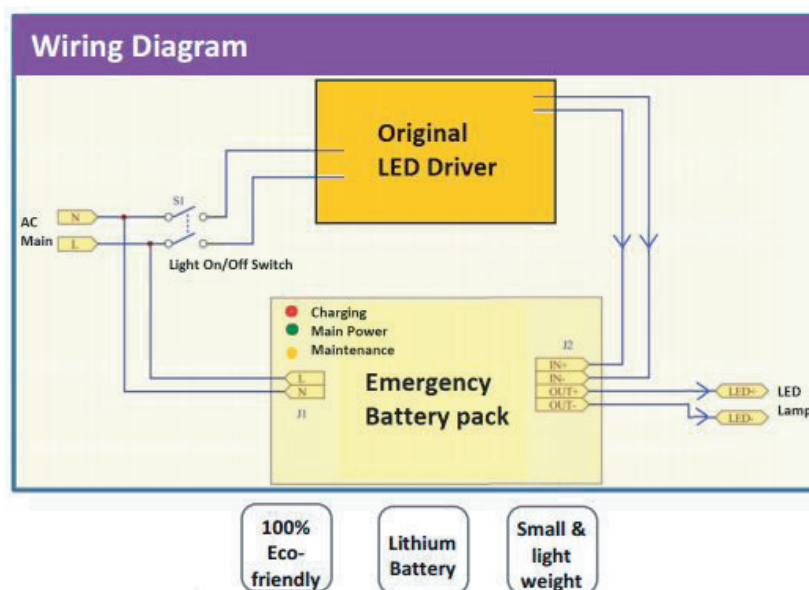

NO.	PHOTO	SINGLE OR DOUBLE	WALL MOUNTED OR SUSPENDED	QTY
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				