



nassli
LED LIGHTS

LED EMERGENCY BULKHEAD

Application:

It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room Factories, Theater, Cinemas and Corridor etc...

Feature:

LED Wall Mounted Light is designed for Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Wall-mounted range of LED products can be used to replace traditional wall-mounted luminaires incorporating compact fluorescent lamps. The Process of selecting, installing and maintaining is so easy it's a simple switch.

SPECIFICATIONS

ITEM	DESCRIPTION
Input Voltage	220 - 240 V A C
Frequency	50 / 60Hz
Power factor	>98%
CCT	3000K, 4000K, 5000K, 6000k
CRI	>80%
LED Efficiency	90-100lm/W
Power supply	Nassli
LED Type	Osram
Materials	PC, & Friendly material
Beam Angle	125°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +85°C
Certifications	CE,SELV&ISO
Mounting	Wall Mounted / Surface Mounted
IP Rating	IP65
Dimmable	On Request
Emergency	Battery Ni-Cd 3.6V 1500MAH / 3HR
Warranty	5 Years



Order code	Dimensions(mm)	Power(Watt)
NSL-WML-355-4W-SMD-NS-XXK-IP65	355x100x55	4
NSL-WML-355-4W-SMD-NS-XXK-IP65-EM	355x100x55	4

DATASHEET

LED EMERGENCY BULKHEAD

The emergency bulkhead is suitable for Ceiling or Wall mounted.




Hinged gear tray for easy installation

Can be used in Maintained or Non-maintained mode

Suitable for indoor or outdoor

Dimensions

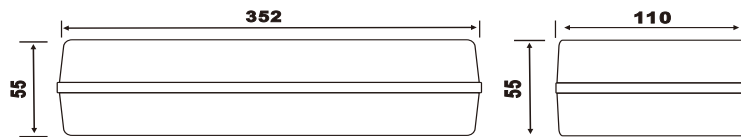

Specification

Model No.:KE298/LED/M	Charging Time:24H
Mode of Operation:Maintained/Non-maintained	Emergency Duration:≥ 3H
Power Consumption:5W	Lumen:220LM (AC), 150LM(DC)
LED Type:SMD2835 27PCS	Working Temperature:0°C - 55°C
CCT:3000-6500K	Materials:PC base &PC diffuser transparent
Ra> 80	Self-Adhesive exit legend Optional
PF:0.5	Test Standard:EN 60598-2-22 EN 60598-1
Battery Type:NI CAD 3.2V 1500mAh	