



nassli
LED LIGHTS

LED FLOOD LIGHT S

Application:

Ideal for any large area with height ceiling. such as, warwhouse, factories, closed parks, commercial complexes, indoor playgrounds, hangars and outdoor areas

Feature:

High cooling aluminum, with zip technology and 3D cooling created air convection channel, make it ideal for hot area. High lumen output. High power saving fixture. Overload protection, short circuit protection, and no-load protection





SPECIFICATIONS

ITEM	DESCRIPTION
Input Voltage	220 - 240 VAC
Frequency	50 / 60 Hz
Power Factor	>98%
CCT	2700K, 3000K, 4000K, 6000K
CRI	>80%
LED Efficiency	130 - 150Lm/W
Power supply	Tridonic / Philips / Nassli
LED Type	Osram / Philips
Materials	Aluminum, PC, & Friendly material
Beam Angle	85° x 147°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +85°C
Certifications	CE, SELV and ISO
Mounting	Wall Mounted / with Base
IP Rating	IP65
Dimmable	On Request
Emergency	N/A
Warranty	5 Years

Order code	Dimensions(mm)	Power(Watt)	Lumen	Weight
NSL-FLS-500W-XXK-SMD-PH-XX-IP65	L980 W298	650	95000	

Nassli Led Company

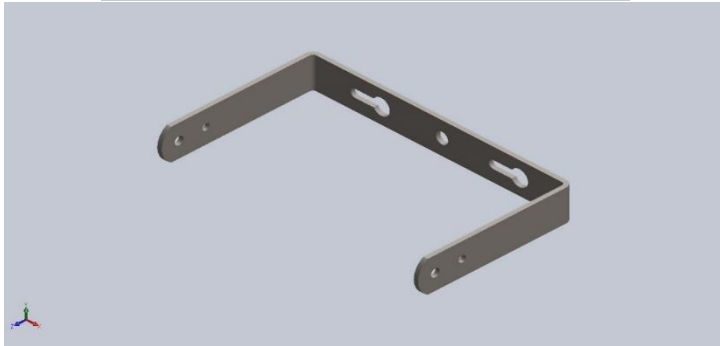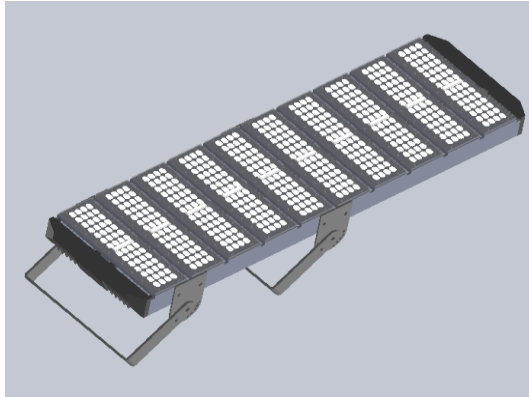

Description

5mm Steel Hand

Simulation of 5mm hand

Date: Monday, May 13, 2024
Designer: Eng. Ahmed Yosef
Study name: Static 1
Analysis type: Static


Table of Contents

Description	1
Assumptions	2
Model Information	2
Study Properties	3
Units	3
Material Properties	4
Loads and Fixtures	4
Connector Definitions	5
Contact Information	5
Mesh information	6
Sensor Details	7
Resultant Forces	7
Beams	7
Study Results	8
Conclusion	10



Assumptions

Model Information

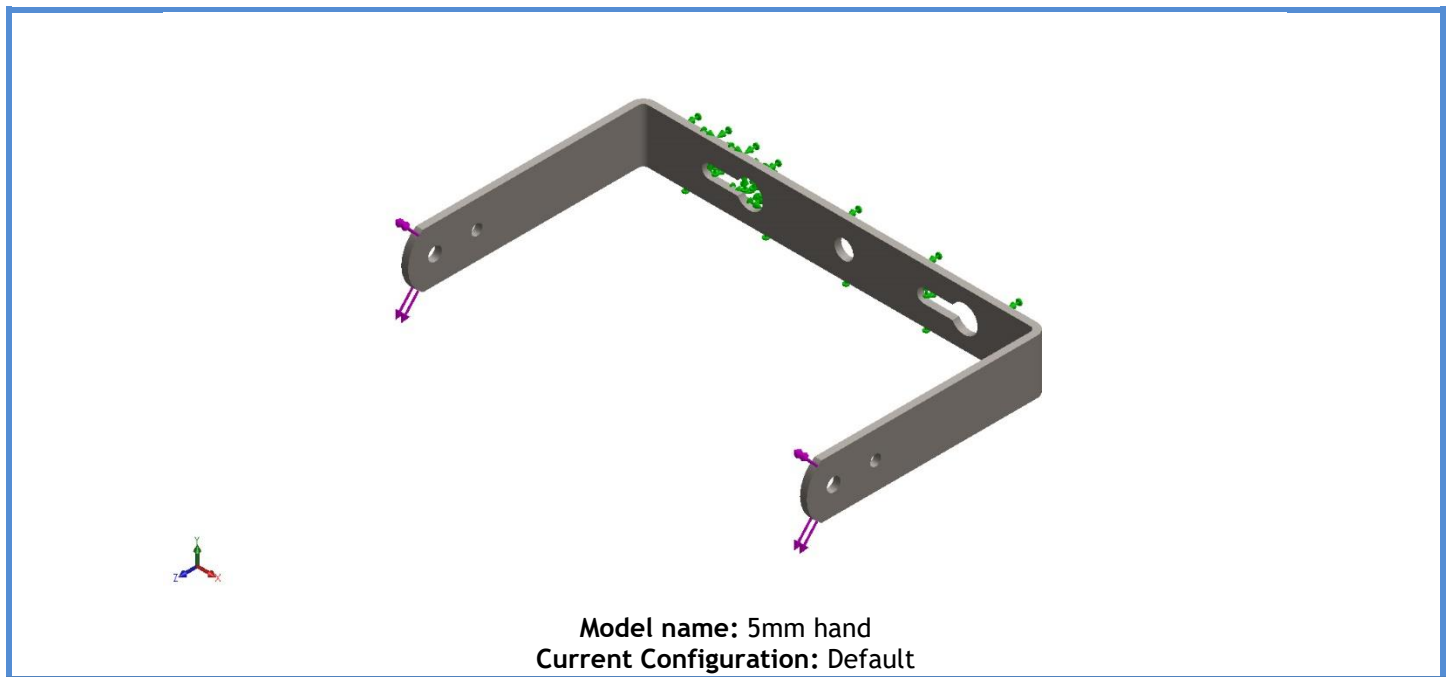

Study Properties


Study name	Static 1
Analysis type	Static
Mesh type	Shell Mesh Using Mid-surfaces
Thermal Effect:	On
Thermal option	Include temperature loads
Zero strain temperature	298 Kelvin
Include fluid pressure effects from SOLIDWORKS Flow Simulation	Off
Solver type	FFEPlus
Inplane Effect:	Off
Soft Spring:	Off
Inertial Relief:	Off
Incompatible bonding options	Automatic
Large displacement	Off
Compute free body forces	On
Friction	Off
Use Adaptive Method:	Off
Result folder	SOLIDWORKS document (C:\Users\acer\Desktop\PC cooler\New folder)

Units


Unit system:	SI (MKS)
Length/Displacement	mm
Temperature	Kelvin
Angular velocity	Rad/sec
Pressure/Stress	N/m ²




Material Properties

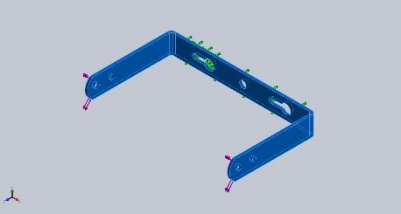Model Reference	Properties	Components
	Name: 1023 Carbon Steel Sheet (SS) Model type: Linear Elastic Isotropic Default failure criterion: Max von Mises Stress Yield strength: 2.82685e+08 N/m ² Tensile strength: 4.25e+08 N/m ² Elastic modulus: 2.05e+11 N/m ² Poisson's ratio: 0.29 Mass density: 7858 kg/m ³ Shear modulus: 8e+10 N/m ² Thermal expansion coefficient: 1.2e-05 /Kelvin	SolidBody 1(Sketched Bend1)(5mm hand)
Curve Data:N/A		

Loads and Fixtures

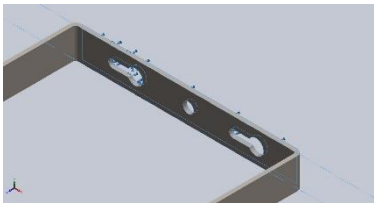Fixture name	Fixture Image	Fixture Details		
Fixed-1		Entities: 1 face(s) Type: Fixed Geometry		
Resultant Forces				
Components	X	Y	Z	Resultant
Reaction force(N)	0.0303521	0.00536644	-825.044	825.044
Reaction Moment(N.m)	-2.11531e-05	-0.000375494	0.0455194	0.045521

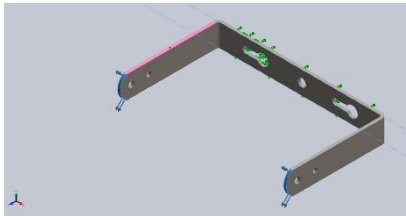Load name	Load Image	Load Details
Force-1		Entities: 2 face(s) Type: Apply normal force Value: 490 N (about 50kg)



Connector Definitions

No Data

Contact Information

No Data




Mesh information

Mesh type	Shell Mesh Using Mid-surfaces
Mesher Used:	Standard mesh
Automatic Transition:	Off
Include Mesh Auto Loops:	Off
Jacobian points	4 Points
Element Size	6.71991 mm
Tolerance	0.335996 mm
Mesh Quality Plot	High

Mesh information - Details

Total Nodes	2580
Total Elements	1150
Time to complete mesh(hh:mm:ss):	00:00:01
Computer name:	

Model name:5mm hand
Study name:Static 1(-Default-)
Mesh type: Shell Mesh Using Mid-surfaces

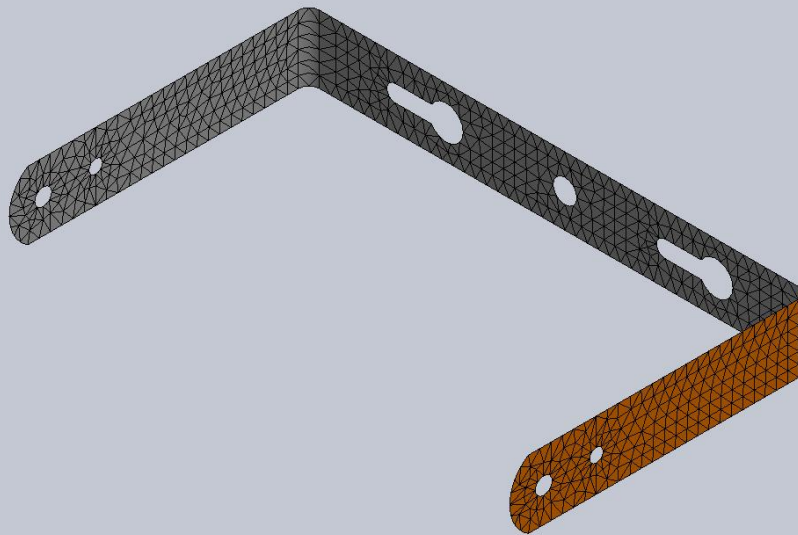

Sensor Details

No Data

Resultant Forces

Reaction forces

Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N	0.0303521	0.00536644	-825.044	825.044

Reaction Moments


Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N.m	-2.11531e-05	-0.000375494	0.0455194	0.045521

Beams

No Data




Study Results

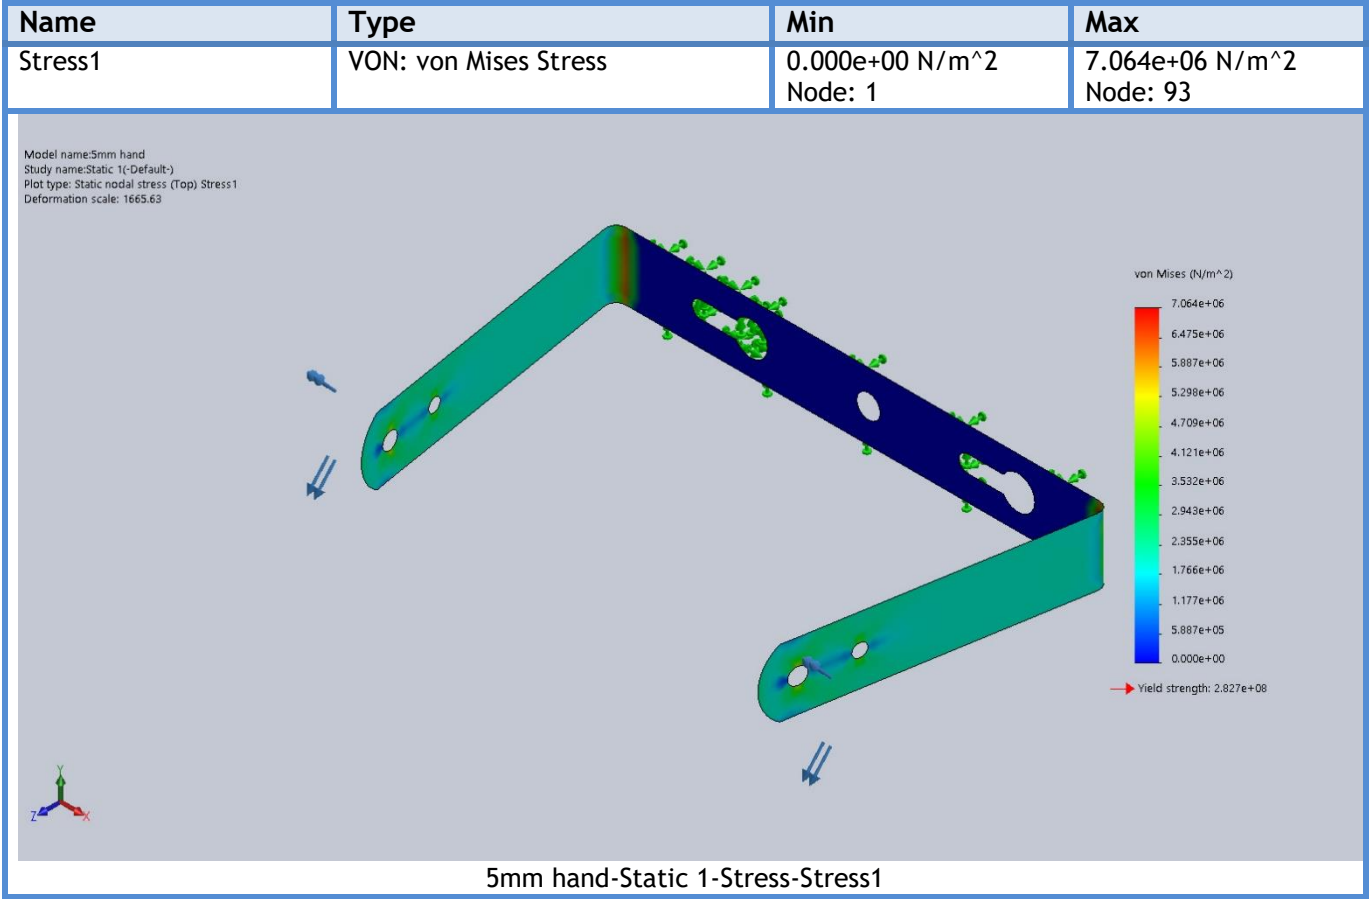


Name	Type	Min	Max
Displacement1	URES: Resultant Displacement	0.000e+00 mm Node: 1	1.786e-02 mm Node: 576



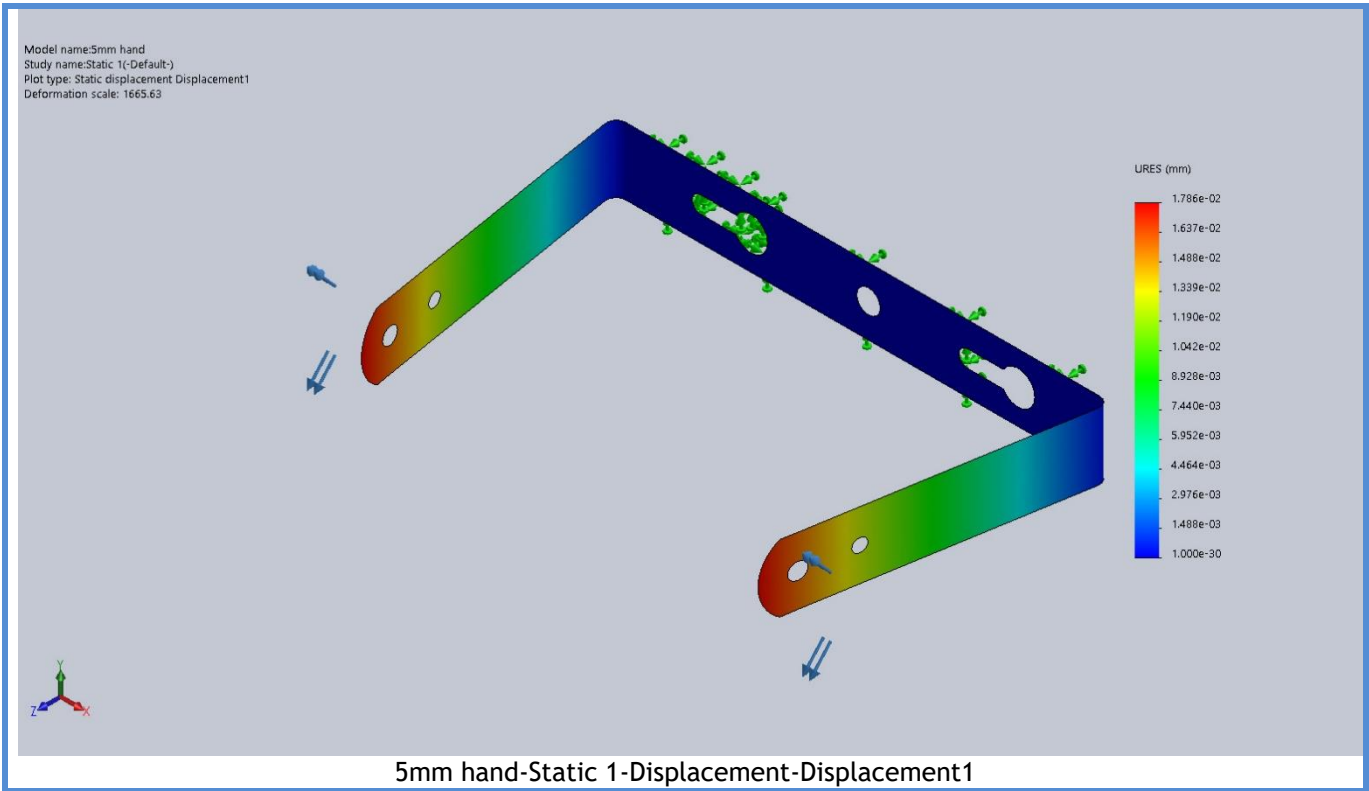

Name	Type	Min	Max
Strain1	ESTRN: Equivalent Strain	0.000e+00 Element: 1	3.237e-05 Element: 466

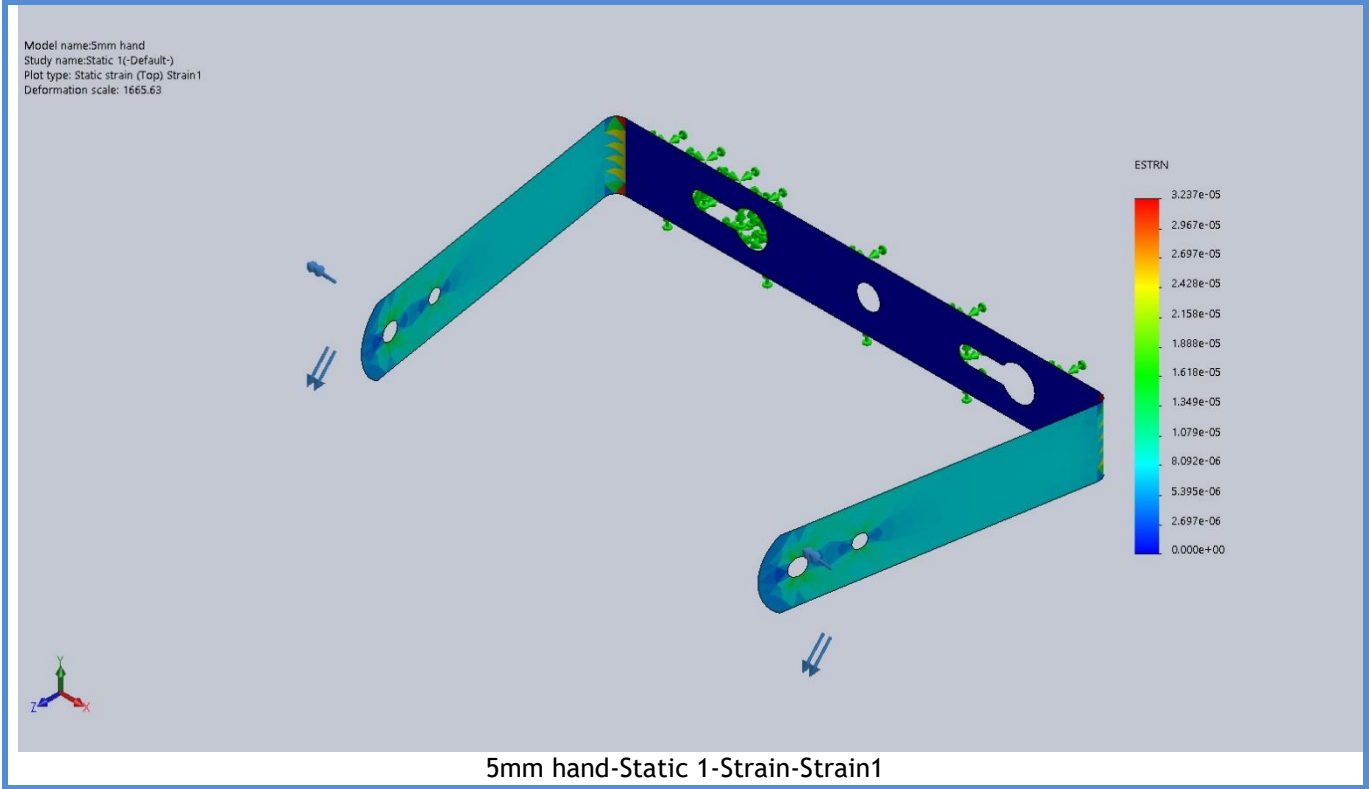

Conclusion

