



nassli
LED LIGHTS

LED FLOOD LIGHT S

Application:

Ideal for any large area with height ceiling. such as, warwhouse, factories, closed parks, commercial complexes, indoor playgrounds, hangars and outdoor areas

Feature:






High cooling aluminum, with zip technology and 3D cooling created air convection channel, make it ideal for hot area. High lumen output. High power saving fixture. Overload protection, short circuit protection, and no-load protection



SPECIFICATIONS

ITEM	DESCRIPTION
Input Voltage	120 - 277 VAC
Frequency	50 / 60 Hz
Power Factor	>98%
CCT	2700K, 3000K, 4000K, 6000K
CRI	>80%
LED Efficiency	130 - 150Lm/W
Power supply	Tridonic / Philips / Nassli
LED Type	Osram / Philips
Materials	Aluminum, PC, & Friendly material
Beam Angle	85° x 147°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +85°C
Certifications	CE, SELV and ISO
Mounting	Wall Mounted / with Base
IP Rating	IP65
Dimmable	On Request
Emergency	N/A
Warranty	5 Years

Order code	Dimensions(mm)	Power(Watt)	Lumen	Weight
NSL-FLS-400W-XXK-SMD-PH-XX-IP65	L340 W298 H278	400	52000	13KG

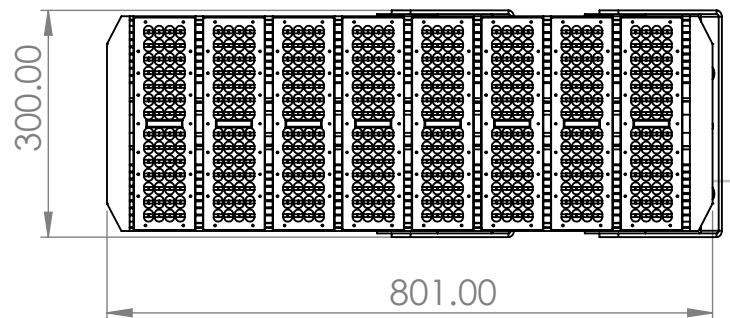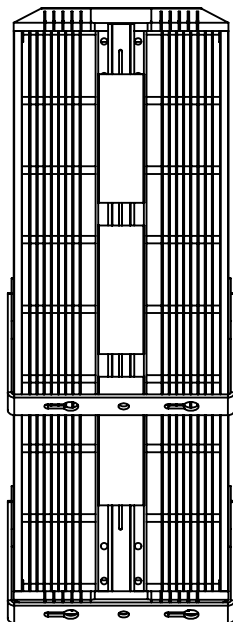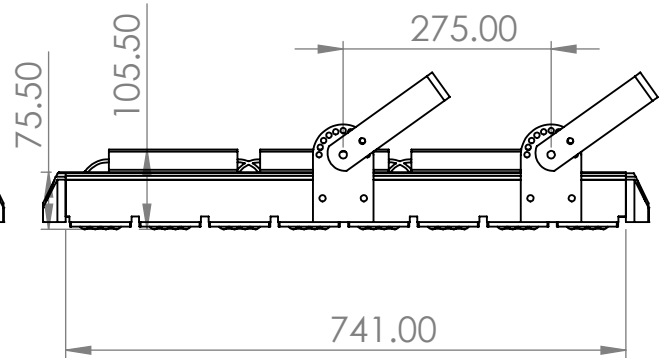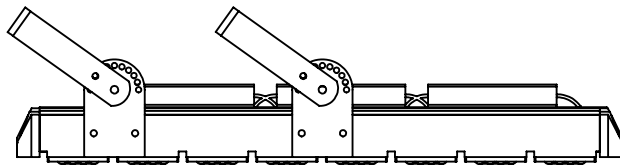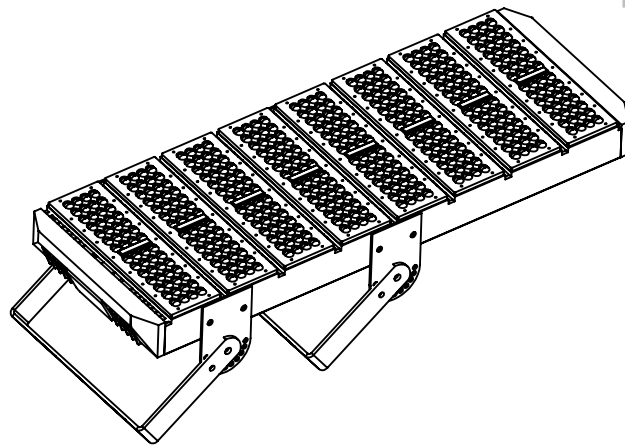

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:

FINISH:

DEBURR AND
BREAK SHARP
EDGES

DO NOT SCALE DRAWING

REVISION

	NAME	SIGNATURE	DATE		
DRAWN					
CHK'D					
APPV'D					
MFG					
Q.A					

MATERIAL:

WEIGHT:

TITLE:




DWG NO.

SCALE:1:10

PC cooler

A4

SHEET 1 OF 1

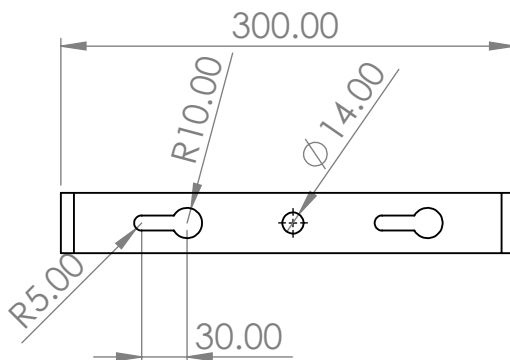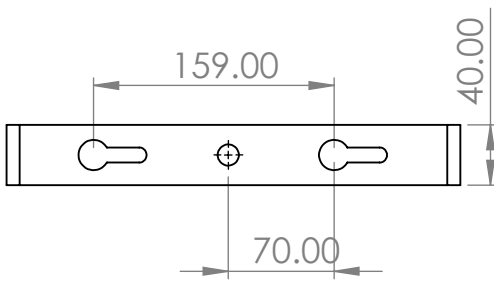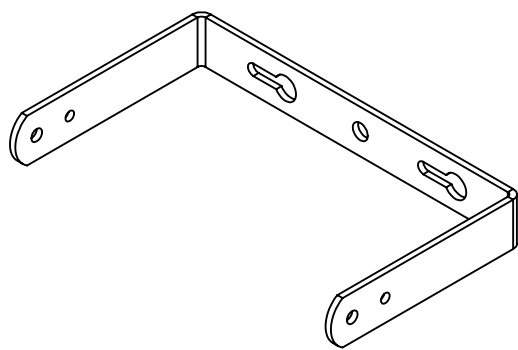

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:

FINISH:

DEBURR AND
BREAK SHARP
EDGES

DO NOT SCALE DRAWING

REVISION

	NAME	SIGNATURE	DATE		
DRAWN					
CHK'D					
APPV'D					
MFG					
Q.A					

MATERIAL:

WEIGHT:

TITLE:

DWG NO.

5mm hand

A4

SCALE:1:5

SHEET 1 OF 1