



nassli
LED LIGHTS

LED FLOOD LIGHT S


Application:

Ideal for any large area with height ceiling. such as, warwhouse, factories, closed parks, commercial complexes, indoor playgrounds, hangars

Feature:

High cooling aluminum, with zip technology and 3D cooling created air convection channel, make it ideal for hot area. High lumen output. High power saving fixture. Overload protection, short circuit protection, and no-load protection

Number of chips as per the required wattage, 50W/CHIP

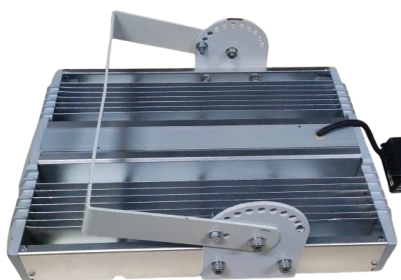

SPECIFICATIONS

ITEM	DESCRIPTION
Input Voltage	120 - 277 VAC
Frequency	50 / 60 Hz
Power Factor	>98%
CCT	2700K, 3000K, 4000K, 6000K
CRI	>80%
LED Efficiency	130 - 150Lm/W
Power supply	Tridonic / Philips
LED Type	Osram / Philips
Materials	Aluminum, PC, & Friendly material
Beam Angle	85° x 147°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +85°C
Certifications	CE, SELV and ISO
Mounting	Wall Mounted / with Base
IP Rating	IP65
Dimmable	On Request
Emergency	N/A
Warranty	5 Years



nasli
LED LIGHTS

LED FLOOD LIGHT S

Order code	Dimensions(mm)	Power(Watt)	Lumen
NSL-FLS-50W-XXK-SMD-PH-XX-IP65	L150 W292 H225	50	6500
NSL-FLS-70W-XXK-SMD-PH-XX-IP65	L150 W292 H225	70	9100
NSL-FLS-100W-XXK-SMD-TD-XX-IP65	L240 W292 H225	100	13000
NSL-FLS-100W-XXK-SMD-PH-XX-IP65	L240 W292 H225	100	13000
NSL-FLS-150W-XXK-SMD-TD-XX-IP65	L340 W298 H278	150	19500
NSL-FLS-150W-XXK-SMD-PH-XX-IP65	L340 W298 H278	150	19500
NSL-FLS-200W-XXK-SMD-TD-XX-IP65	L485 W298 H278	200	26000
NSL-FLS-200W-XXK-SMD-PH-XX-IP65	L485 W298 H278	200	26000
NSL-FLS-250W-XXK-SMD-TD-XX-IP65	L340 W298 H278	250	32500
NSL-FLS-250W-XXK-SMD-PH-XX-IP65	L150 W292 H225	250	32500
NSL-FLS-300W-XXK-SMD-TD-XX-IP65	L240 W292 H225	300	39000
NSL-FLS-300W-XXK-SMD-PH-XX-IP65	L340 W298 H278	300	39000
NSL-FLS-350W-XXK-SMD-TD-XX-IP65	L150 W292 H225	350	45500
NSL-FLS-350W-XXK-SMD-PH-XX-IP65	L240 W292 H225	350	45500
NSL-FLS-400W-XXK-SMD-TD-XX-IP65	L340 W298 H278	400	52000
NSL-FLS-400W-XXK-SMD-PH-XX-IP65	L340 W298 H278	400	52000