



nassli
LED LIGHTS

WATERPROOF BODY

Application:


It can be widely used for Trade Shows, Supermarkets, Schools, Hospitals, Factories, Car Parking, Airport, Corridor etc....

Feature:

LED ceiling light: The LED diffuser light is mounted directly on the ceiling for plaster ceiling mounting. The LED moisture-proof diffuser light is already completely wired for LED technology and does not have to be converted. Operating temperature -20°C to 65°C, low heat generation: Temperature heat sink >1h max. approx. 45°C Robust plastic housing and protection class IP65 prevent penetration of foreign bodies or dust as well as protection against water jets

SPECIFICATIONS

ITEM	DESCRIPTION
Materials	Aluminum, PC, & Friendly material
Raw material	Polycarbonate
Beam Angle	160°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +85°C
Mounting	Ceiling, Wall mounting
IP Rating	IP65
Mech. Impact Protection	IK07
Warranty	5 Years

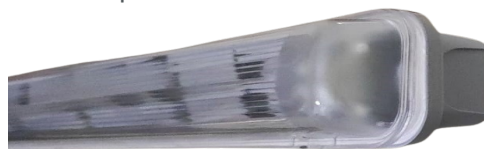

OPTION #2



Order code	Dimensions(mm)	LED SIZE	IP Rating
NSL-WPILL-LTU-1x120-IP65	L1270 x W600 x H55	T8-120	65