



# NASSLI LED LINEAR LIGHT

NSL-LLS-94.3X91.8X1120-LENS-CC-100W-XXK-SMD-PH-CN-IP65

## Application

It can be widely used for Decoration, shopping malls, Trade shows, Supermarkets, Hotels, Schools,

Hospitals, Factories, Conference Hall, Palces, Meeting room, Theater, Cinemas,

Kitchens and Corridor etc...

## Technical Data:

Power Source:220-240 VAC 60/50HZ

LED Type: Philips 3030


Low tolerances for colour tempereature: MacAdam 3

Humidity Storage: %80-10

Dimmable: no (can be dimmableor DALI on request)

Beam Angle: 85° x 147°

Size: 1120X94.3X91.8 mm

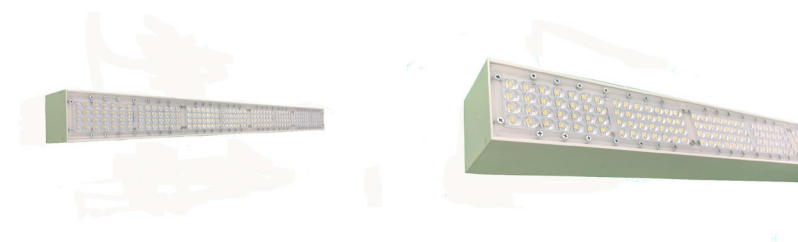

## SPECIFICATIONS

### MAIN SPECIFICATIONS (T=25C)

| ITEM                  | DESCRIPTION                            |
|-----------------------|----------------------------------------|
| Input Voltage         | 220- 240VAC                            |
| Frequency             | 50/ 60 H z                             |
| LED Type              | Philips 3030                           |
| Power                 | 100W                                   |
| Power supply          | Tridonic/ Philips /Nassli              |
| Flux                  | 11000 Lm                               |
| Mounting              | Suspended / Surface                    |
| LED Efficiency        | 120-130 Lm/W                           |
| Materials             | Aluminum, PC, Iron & Friendly material |
| Power factor          | >95%                                   |
| CCT                   | 3000K, 4000K, 5000K 6000K              |
| CRI                   | >80%                                   |
| Life Time             | >50,000 Hour                           |
| Operating Temperature | °20-C to °55+C                         |
| Storage Temperature   | °40-C to +°85C                         |
| Certifications        | CE, SELV, ISO and ROHS                 |
| Warranty              | 5 Years                                |
| IP Rating             | IP65                                   |