



NASSLI LED LINEAR LIGHT

NSL-LLS-94.3X91.8X280-LENS-CC-40W-4000K-SMD-NS-IP65

Application

It can be widely used for Decoration, shopping malls, Trade shows, Supermarkets, Hotels, Schools,

Hospitals, Factories, Conference Hall, Palces, Meeting room, Theater, Cinemas,

Kitchens and Corridor etc...

Technical Data:

Power Source:220-240 VAC 60/50HZ

LED Type: Philips 3030


Low tolerances for colour tempereature: MacAdam 3

Humidity Storage: %80-10

Dimmable: no (can be dimmableor DALI on request)

Beam Angle: 85° x 147°

Size: 280X94.3X91.8 mm

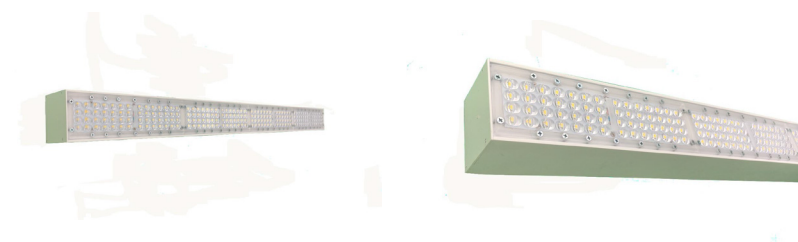

SPECIFICATIONS

MAIN SPECIFICATIONS (T=25C)

ITEM	DESCRIPTION
Input Voltage	220- 240VAC
Frequency	50/ 60 H z
LED Type	Philips 3030
Power	40W
Power supply	Tridonic/ Philips /Nassli
Flux	4400Lm
Mounting	Suspended / Surface / Wall
LED Efficiency	120-130 Lm/W
Materials	Aluminum, PC, Iron & Friendly material
Power factor	>95%
CCT	3000K, 4000K, 5000K 6000K
CRI	>80%
Life Time	>50,000 Hour
Operating Temperature	°20-C to °55+C
Storage Temperature	°40-C to +°85C
Certifications	CE, SELV, ISO and ROHS
Warranty	5 Years
IP Rating	IP65