



**NASSLI**  
LED LIGHTS

# LED STREET LIGHT S


## Application:

Ideal for collector roads, local roads, commercial and industrial complexes, driveway, open areas, public squares, parks and playgrounds, factories, airports.

## Feature:

Fixture designed for harsh and hot environments.

Each LED module can be replaced separately. Overload protection, short circuit protection, and no-load protection. Aluminum heat dissipation module has a surface anodic oxidation process to make it resistant and anti-aging fixture.

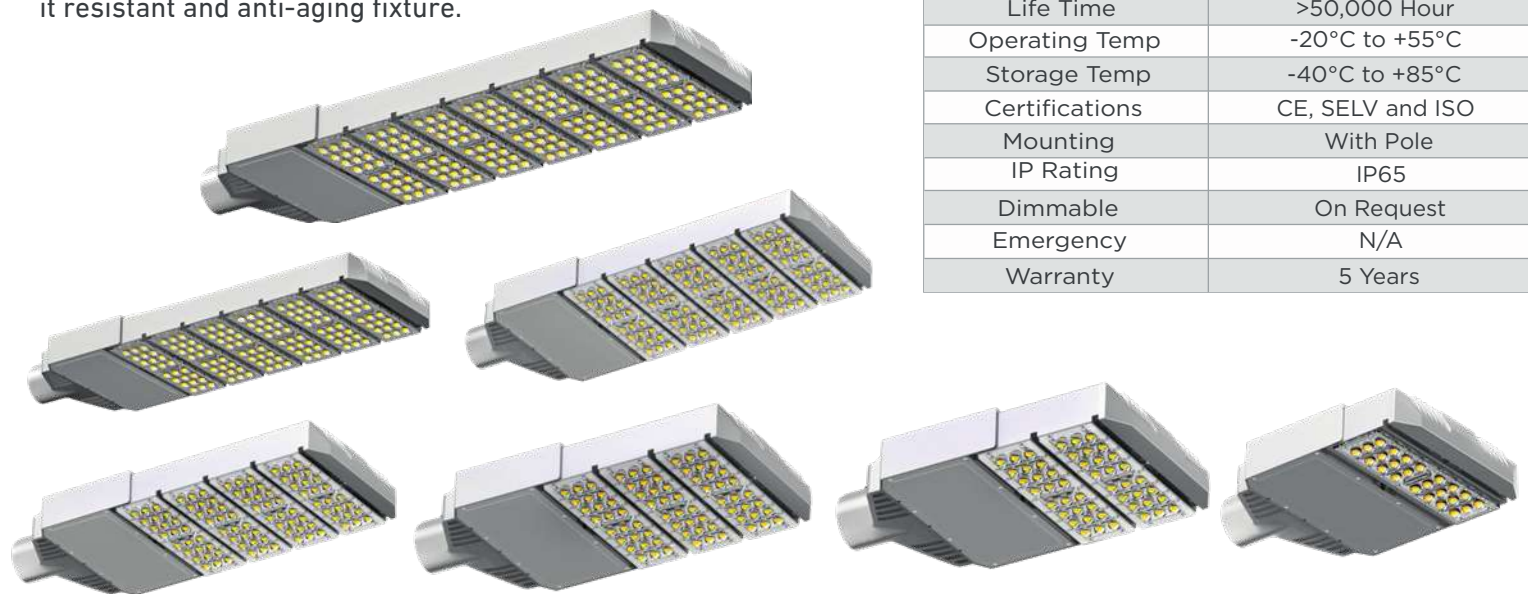

## SPECIFICATIONS

| ITEM           | DESCRIPTION                       |
|----------------|-----------------------------------|
| Input Voltage  | 120 - 277 VAC                     |
| Frequency      | 50 / 60 Hz                        |
| Power Factor   | >98%                              |
| CCT            | 2700K, 3000K, 4000K, 6000K        |
| CRI            | >80%                              |
| LED Efficiency | 120 - 130Lm/W                     |
| Power supply   | Tridonic / Nassli / Philips       |
| LED Type       | Osram / Philips                   |
| Materials      | Aluminum, PC, & Friendly material |
| Beam Angle     | 85° x 147°                        |
| Life Time      | >50,000 Hour                      |
| Operating Temp | -20°C to +55°C                    |
| Storage Temp   | -40°C to +85°C                    |
| Certifications | CE, SELV and ISO                  |
| Mounting       | With Pole                         |
| IP Rating      | IP65                              |
| Dimmable       | On Request                        |
| Emergency      | N/A                               |
| Warranty       | 5 Years                           |



**nassli**  
LED LIGHTS

# LED STREET LIGHT S

| Order code                       | Dimensions(mm) | Power(Watt) | Lumen |
|----------------------------------|----------------|-------------|-------|
| NSL-STLS-50W-XXK-SMD-TD-XX-IP65  | L395 W292 H75  | 50          | 6500  |
| NSL-STLS-50W-XXK-SMD-PH-XX-IP65  | L395 W292 H75  | 50          | 6500  |
| NSL-STLS-100W-XXK-SMD-TD-XX-IP65 | L480 W292 H76  | 100         | 13000 |
| NSL-STLS-100W-XXK-SMD-PH-XX-IP65 | L480 W292 H76  | 100         | 13000 |
| NSL-STLS-150W-XXK-SMD-TD-XX-IP65 | L575 W292 H77  | 150         | 19500 |
| NSL-STLS-150W-XXK-SMD-PH-XX-IP65 | L575 W292 H77  | 150         | 19500 |
| NSL-STLS-200W-XXK-SMD-TD-XX-IP65 | L660 W292 H78  | 200         | 26000 |
| NSL-STLS-200W-XXK-SMD-PH-XX-IP65 | L660 W292 H78  | 200         | 26000 |
| NSL-STLS-250W-XXK-SMD-TD-XX-IP65 | L755 W292 H79  | 250         | 32500 |
| NSL-STLS-250W-XXK-SMD-PH-XX-IP65 | L755 W292 H79  | 250         | 32500 |
| NSL-STLS-300W-XXK-SMD-TD-XX-IP65 | L840 W292 H71  | 300         | 39000 |
| NSL-STLS-300W-XXK-SMD-PH-XX-IP65 | L840 W292 H71  | 300         | 39000 |
| NSL-STLS-350W-XXK-SMD-TD-XX-IP65 | L935 W292 H71  | 350         | 44500 |
| NSL-STLS-350W-XXK-SMD-PH-XX-IP65 | L935 W292 H71  | 350         | 44500 |
| NSL-STLS-400W-XXK-SMD-TD-XX-IP65 | L1020 W292 H71 | 400         | 52000 |
| NSL-STLS-400W-XXK-SMD-PH-XX-IP65 | L1020 W292 H71 | 400         | 52000 |