



nassli
LED LIGHTS

LED STREET LIGHT HD

Application:

Ideal for collector roads, local roads, commercial and industrial complexes, driveway, open areas, public squares, parks and playgrounds, factories, airports.



Feature:

Fixture designed for harsh and hot environments.

Each LED module can be replaced separately. Overload protection, short circuit protection, and no-load protection. Aluminum heat dissipation module has a surface anodic oxidation process to make it resistant and anti-aging fixture.



Dimensions(mm)

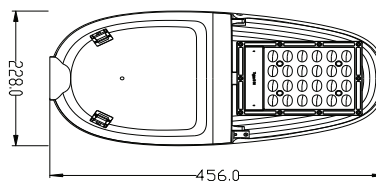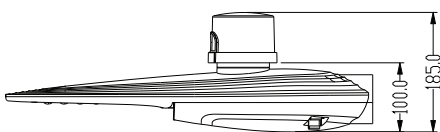

SPECIFICATIONS

ITEM	DESCRIPTION
Input Voltage	220 - 240 VAC
Frequency	50 / 60 Hz
Power Factor	>90%
CCT	3000K, 4000K, 5000K, 6000K
CRI	>70%
LED Efficiency	120 - 130Lm/W
Power supply	Tridonic / Nassli / Philips
LED Type	Osram / Philips
Materials	Aluminum, PC, & Friendly material
Light Distriputior	Optional
Life Time	>100000 Hour
Operating Temp	-20°C to +40°C
Storage Temp	-40°C to +85°C
Certifications	CE, SELV and ISO
Mounting	With Pole
IP Rating	IP66
Dimmable	Photocell Sensor
Emergency	N/A
Warranty	5 Years



nassli
LED LIGHTS

LED STREET LIGHT HD

Order code	Dimensions(mm)	Power(Watt)	Lumen
NSL-STHD-40W-XXK-SMD-NS-IP66	L456 W228 H100	40	5200
NSL-STHD-50W-XXK-SMD-NS-IP66	L456 W228 H100	50	6500
NSL-STHD-60W-XXK-SMD-NS-IP66	L456 W228 H100	60	7800
NSL-STHD-75W-XXK-SMD-NS-IP66	L456 W228 H100	75	9750
NSL-STHD-90W-XXK-SMD-NS-IP66	L600 W285 H185	90	11700
NSL-STHD-100W-XXK-SMD-NS-IP66	L600 W285 H185	100	13000
NSL-STHD-120W-XXK-SMD-NS-IP66	L600 W285 H185	120	15600
NSL-STHD-150W-XXK-SMD-NS-IP66	L600 W285 H185	150	19500
NSL-STHD-180W-XXK-SMD-NS-IP66	L600 W285 H185	180	27000
NSL-STHD-200W-XXK-SMD-NS-IP66	L600 W285 H185	200	26000
NSL-STHD-40W-XXK-SMD-TD-XX-IP66	L456 W228 H100	40	5200
NSL-STHD-50W-XXK-SMD-TD-XX-IP66	L456 W228 H100	50	6500
NSL-STHD-60W-XXK-SMD-TD-XX-IP66	L456 W228 H100	60	7800
NSL-STHD-75W-XXK-SMD-TD-XX-IP66	L456 W228 H100	75	9750
NSL-STHD-90W-XXK-SMD-TD-XX-IP66	L600 W285 H185	90	11700
NSL-STHD-100W-XXK-SMD-TD-XX-IP66	L600 W285 H185	100	13000
NSL-STHD-120W-XXK-SMD-TD-XX-IP66	L600 W285 H185	120	15600
NSL-STHD-150W-XXK-SMD-TD-XX-IP66	L600 W285 H185	150	19500
NSL-STHD-180W-XXK-SMD-TD-XX-IP66	L600 W285 H185	180	27000
NSL-STHD-200W-XXK-SMD-TD-XX-IP66	L600 W285 H185	200	26000
NSL-STHD-40W-XXK-SMD-PH-XX-IP66	L456 W228 H100	40	5200
NSL-STHD-50W-XXK-SMD-PH-XX-IP66	L456 W228 H100	50	6500
NSL-STHD-60W-XXK-SMD-PH-XX-IP66	L456 W228 H100	60	7800
NSL-STHD-75W-XXK-SMD-PH-XX-IP66	L456 W228 H100	75	9750
NSL-STHD-90W-XXK-SMD-PH-XX-IP66	L600 W285 H185	90	11700
NSL-STHD-100W-XXK-SMD-PH-XX-IP66	L600 W285 H185	100	13000
NSL-STHD-120W-XXK-SMD-PH-XX-IP66	L600 W285 H185	120	15600
NSL-STHD-150W-XXK-SMD-PH-XX-IP66	L600 W285 H185	150	19500
NSL-STHD-180W-XXK-SMD-PH-XX-IP66	L600 W285 H185	180	27000
NSL-STHD-200W-XXK-SMD-PH-XX-IP66	L600 W285 H185	200	26000