



nassli
LED LIGHTS

LED STREET LIGHT ADJ

Application:

Ideal for collector roads, local roads, commercial and industrial complexes, driveway, open areas, public squares, parks and playgrounds, factories, airports.

Feature:

Fixture designed for harsh and hot environments.

Overload protection, short circuit protection, and no-load protection. Aluminum heat dissipation module has a surface anodic oxidation process to make it resistant and anti-aging fixture,

1. Adjustable angle +15° ~ -15° degree.
2. Inrush Current: <80A/350uS@230VAC.
3. High Efficiency: up to 95%.
4. Adjustable output current via a potentiometer.
5. 3 Version: 3 in 1 dimming , Non-dimmable and 3 in 1.
6. Dimming +12V AUX power supply.
7. Equipped with selectable light sensor module (FAA/FAC).
8. Can be dimmed to off without after glow.
9. Flicker free.
10. Surge Protection: L-N: 6KV & L/N-GND 6KV.

100 watts can be calibrated (73-100) watts

150 watts can be calibrated (97-150) watts

200 watts can be calibrated (132-200) watts




SPECIFICATIONS

ITEM	DESCRIPTION
Input Voltage	100-277VAc (voltage limit: 90-305VAc)
Frequency	0/50/60 Hz
DC Input Voltage	141-276Vdc
Power Factor	≥0.98/120Vac @ full load; ≥0.95/230Vac @full load
LED Efficiency	130-140lm/w
THD	≤15% @full load
CCT	3000K, 4000K, 6000K
Efficiency	≥92.5%/120Vac @ 240Vdc/0.83A; ≥94.5%/230 Vac @240Vdc/0.83A
CRI	>80%
Standby Power Consumption	≤0.5W @220Vac
Power supply	Nassli
LED Type	SMD Philips 3030
Materials	Aluminum, PC, & Friendly material
Beam Angle	155° x 80°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +85°C
Mounting	With Pole
IP Rating	IP65
Dimmable	On Request
Emergency	On Request
Warranty	5 Years



nassli
LED LIGHTS

LED STREET LIGHT ADJ

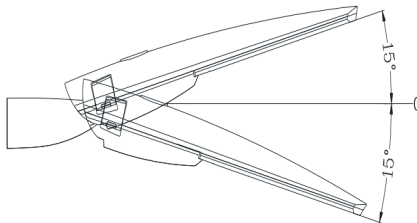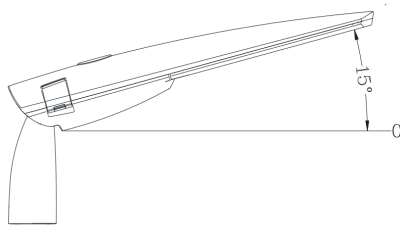

Order code	Dimensions(mm)	Beam Angle	Power(Watt)	LED Efficiency
NSL-STLL-50W-XXK-NS-IP65	621 x 287 x 96mm	155° x 80°	50	130-140L/m
NSL-STLL-100W-XXK-NS-IP65	738 x 289 x 118mm	155° x 80°	100	130-140L/m
NSL-STLL-150W-XXK-NS-IP65	992 x 362 x 140mm	155° x 80°	150	130-140L/m
NSL-STLL-200W-XXK-NS-IP65	992 x 362 x 140mm	155° x 80°	200	130-140L/m